


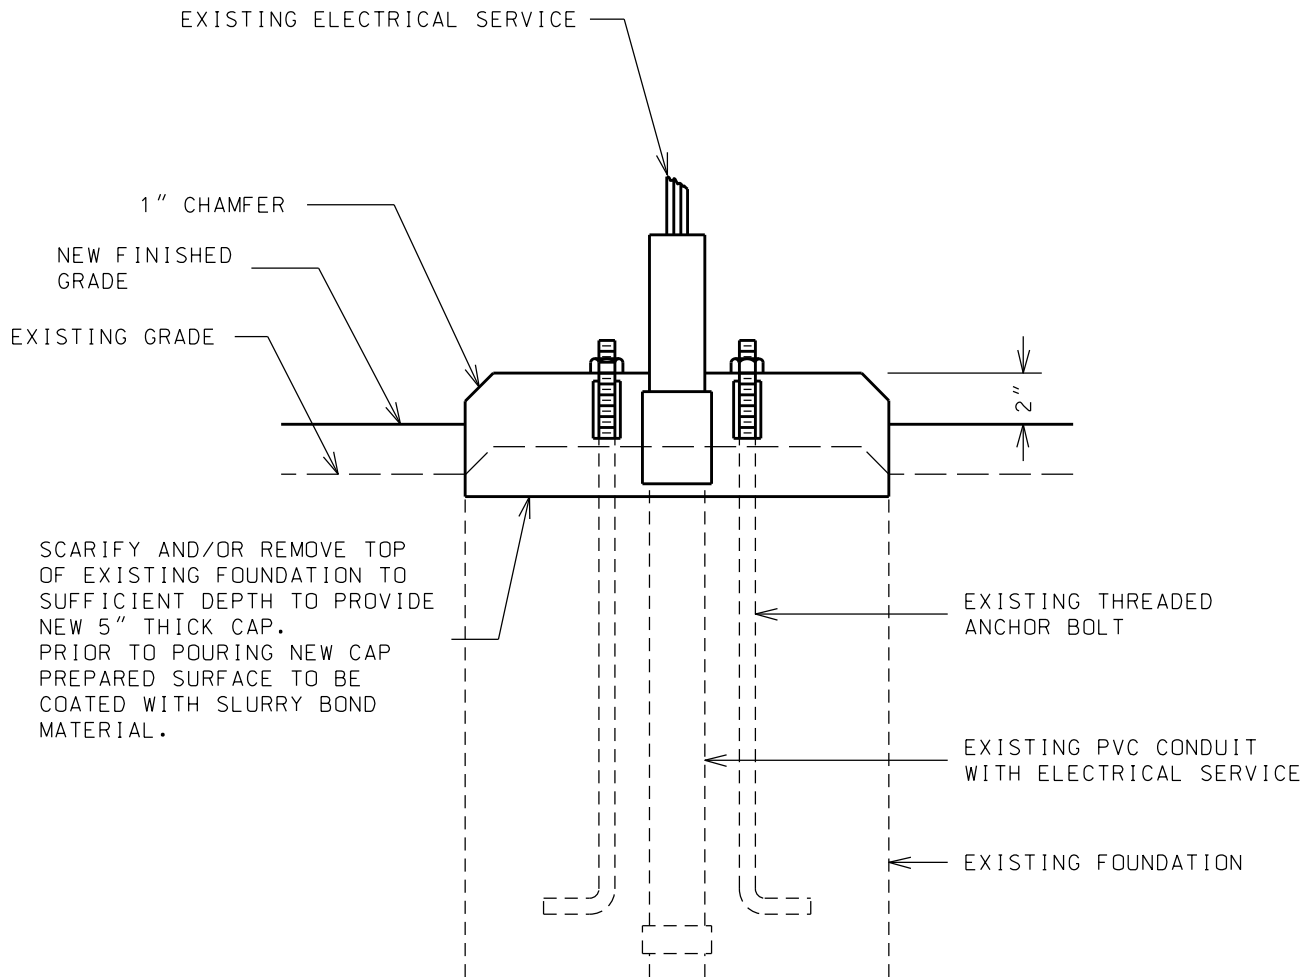

NOTES:

1. NEW CAP TO BE MADE OF CLASS K CONCRETE. TOP OF NEW CAP TO BE 2 INCHES ABOVE FINISHED GRADE.
2. EXISTING ANCHOR BOLTS ARE TO BE EXTENDED AS NECESSARY USING NEW GALVANIZED THREADED NIPPLES AND COUPLINGS. TOP OF ANCHOR BOLTS TO EXTEND 2 INCHES ABOVE TOP OF FOUNDATION.
3. EXISTING CONDUIT IS TO BE EXTENDED AS NECESSARY USING NEW PVC SCHEDULE 40 PIPE EXTENSIONS AND COUPLINGS. TOP OF CONDUIT TO EXTEND 6 INCHES ABOVE TOP OF FOUNDATION.
4. SUPPLY TWO NEW LEVELING SHIMS FOR EACH EXISTING ANCHOR BOLT FOR LEVELING BASE PLATE AND TO PLUMB POLE.

CITY OF ROCHESTER

FIBERGLASS POLE FOUNDATION EXTENSION ADJUSTMENT

ISSUED 9-2-91

REVISED 4-28-06

STD. DWG.

NO. R671-10