



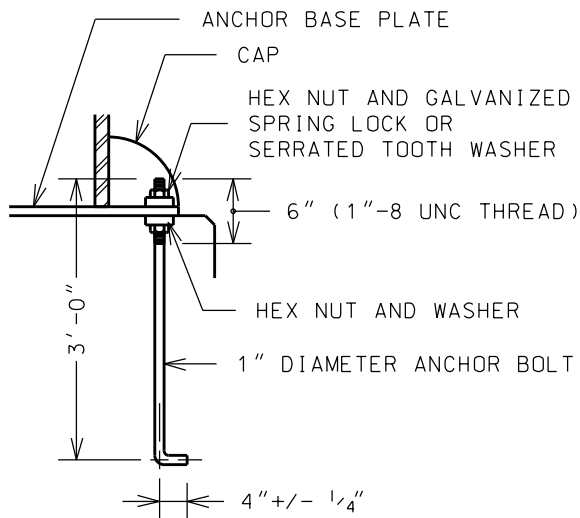


DIAMETER OF BOLT CIRCLE WILL BE AS SPECIFIED BY THE CITY



TOP VIEW

ANCHOR BOLT

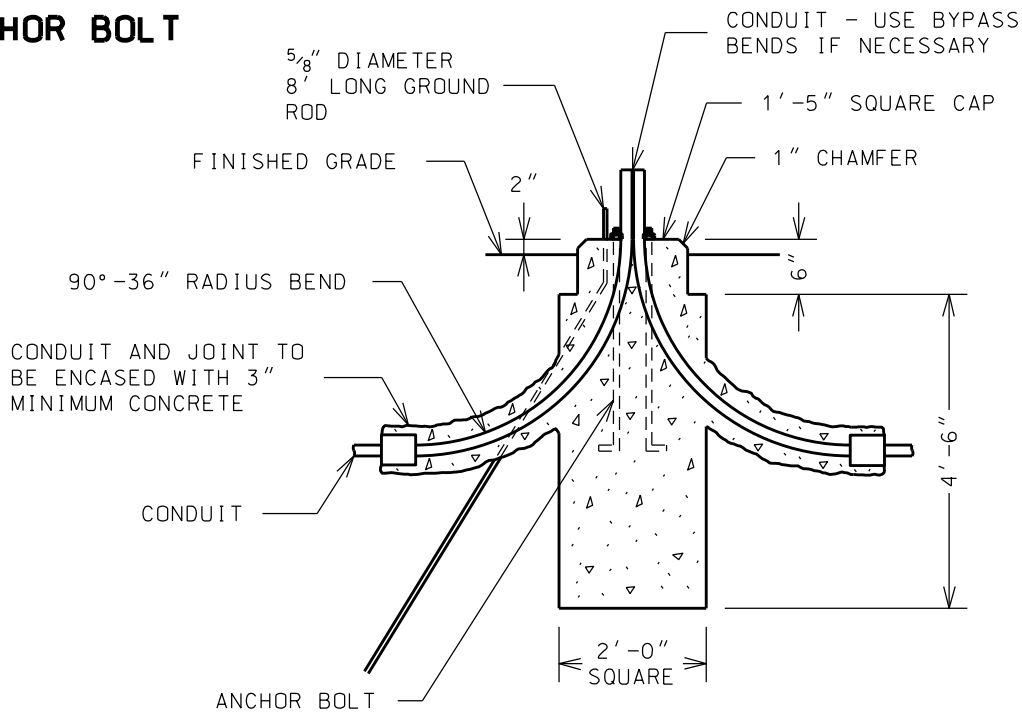

FOUNDATION

NOTES:

1. FOUNDATION TO BE MADE OF CLASS K CONCRETE. TOP OF FOUNDATION TO BE 2 INCHES ABOVE FINISHED GRADE.
2. GROUND ROD TO BE DRIVEN INTO UNDISTURBED EARTH ADJACENT TO FOUNDATION AND BENT INTO FOUNDATION TOP. TOP OF GROUND ROD TO EXTEND 4 INCHES ABOVE TOP OF FOUNDATION.
3. ANCHOR BOLTS TO BE IN ACCORDANCE WITH ASTM F1554 GRADE 55. TOP OF ANCHOR BOLTS TO EXTEND 3 INCHES ABOVE TOP OF FOUNDATION.
4. TOP OF CONDUIT TO EXTEND 9 INCHES ABOVE TOP OF FOUNDATION.
5. SUPPLY TWO LEVELING SHIMS WITH EACH ANCHOR BOLT FOR LEVELING BASE PLATE AND TO PLUMB POLE.

CITY OF ROCHESTER

METAL POLE FOUNDATION

ISSUED 9-2-91

REVISED 4-28-06

STD. DWG.

NO. R671-6