



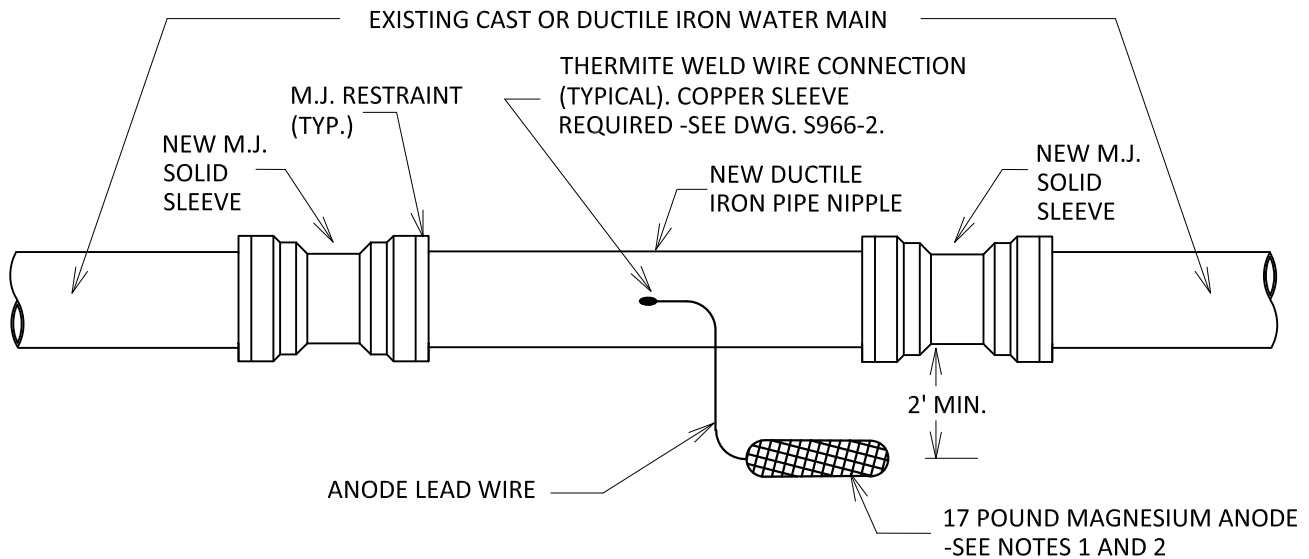

ANODE AT INSERTION SLEEVE – PLAN

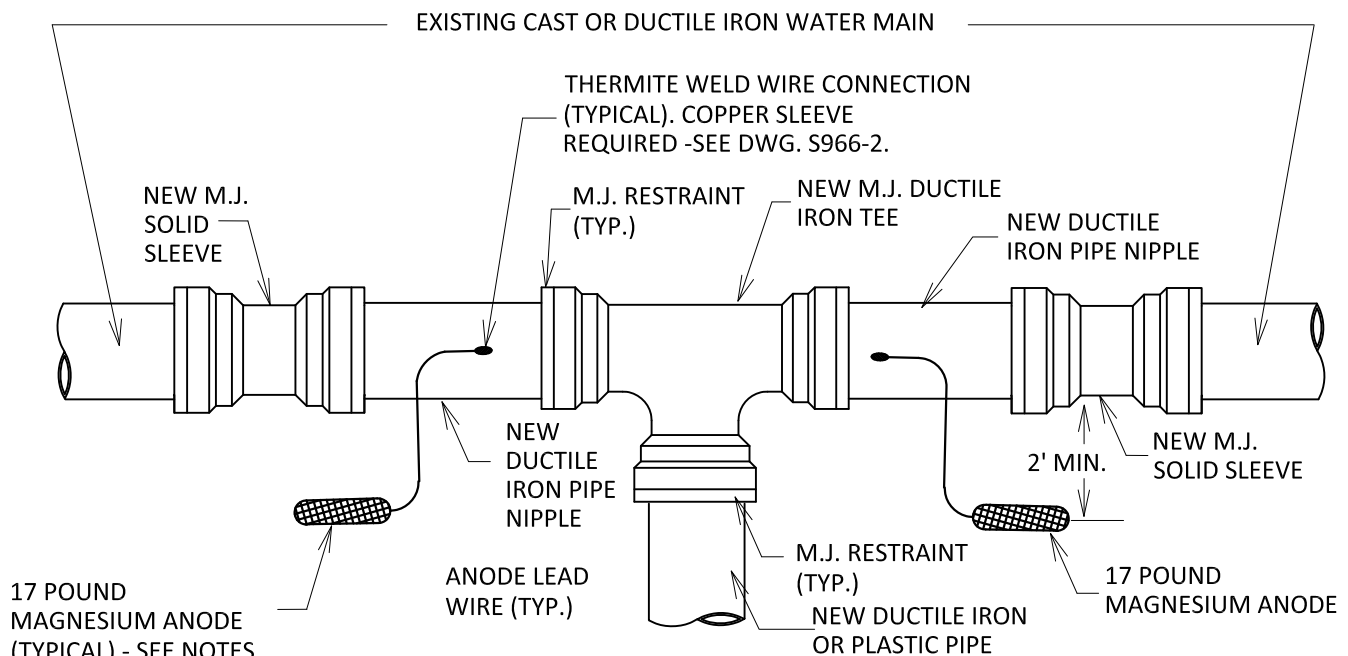

ANODE AT CUT-IN TEE – PLAN

NOTES:

1. USE HIGH POTENTIAL MAGNESIUM ANODE IN PRE-PACKAGED CLOTH BAG WITH BACKFILL. LISTED WEIGHT IS BARE WEIGHT OF ANODE INGOT (EXCLUDING BACKFILL).
2. ANODE IS TO BE PLACED IN TRENCH, WITH ANODE CENTERLINE 6 INCHES MINIMUM BELOW BOTTOM OF MAIN AND 2 FEET MINIMUM FROM SIDE WALL OF MAIN. ANODE TO BE SURROUNDED WITH NATIVE BACKFILL.
3. ALL NEW DUCTILE IRON PIPE NIPPLES AND FITTINGS ARE TO BE ENCASED WITH POLYETHYLENE WRAP

CITY OF ROCHESTER		
ANODES AT INSERTION SLEEVE AND CUT-IN TEE ON EXISTING IRON PIPE		
ISSUED	1-05-12	NON-STANDARD DWG.NO.S966-7
REVISED		