


FAR SIDE CURB BUMP-OUT
WITH
APPROACH LANE TAPER

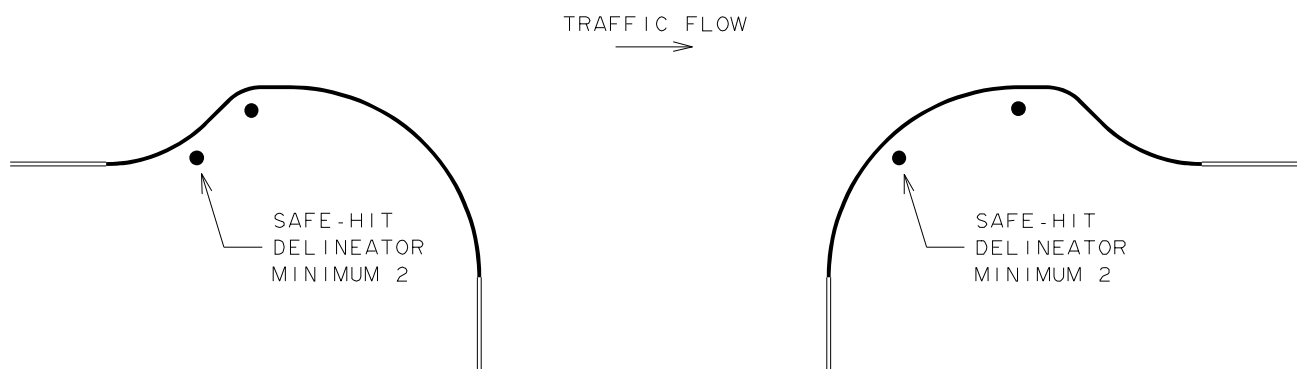

NEAR SIDE CURB BUMP-OUT
WITH OR WITHOUT
FAR SIDE CURB BUMP-OUT

NOTES :

1. TOTAL NUMBER AND LOCATION OF DELINEATORS WILL BE AS REQUIRED BY CITY.
2. DELINEATOR TO BE CENTERED 2 FEET OFF BACK EDGE OF CURB OR CONCRETE GUTTER.
3. SEE DETAIL S609-20 FOR CURB BUMP-OUT LAYOUT.
4. SEE DETAIL S646-1 FOR DELINEATOR.

CITY OF ROCHESTER		
CURB BUMP-OUT DELINEATOR AND PAVEMENT MARKINGS LAYOUT		
ISSUED	2-8-13	NON-STANDARD DWG.NO.S609-21
REVISED	1-1-17	