


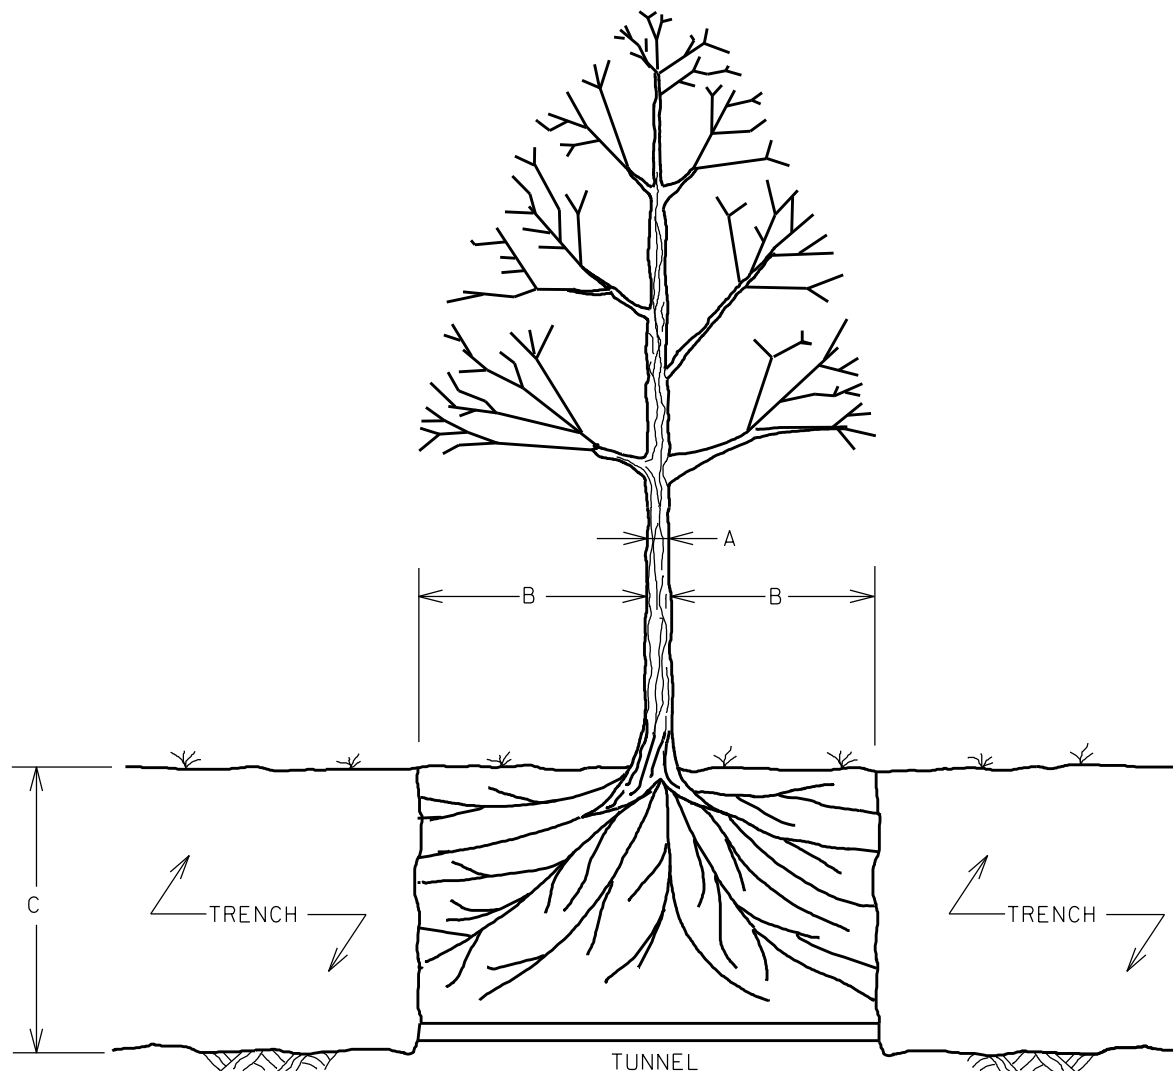

TREE DIAMETER "A" (DBH)	DISTANCE OF TUNNEL AND FENCING FROM FACE OF TREE TRUNK EACH SIDE "B"	RECOMMENDED DEPTH OF TUNNEL OR TRENCH "C"
LESS THAN 10"	6'	2½'
10" - 14"	10'	3'
15" - 19"	12'	3½'
20" OR MORE	15'	4'

NOTES:

1. OPEN TRENCHING IN THE ROOT ZONE AREA OF A PUBLIC TREE IS PROHIBITED EXCEPT IN CASES WHERE THE TRENCHING FALLS OUTSIDE THE CANOPY OF THE TREE INVOLVED. IN SOME INSTANCES, EXCEPTIONS MAY BE ALLOWED IF IN THE OPINION OF THE CITY THE IMPACT OF TRENCHING UPON THE TREE WILL BE NEGLIGIBLE.
2. BEFORE COMMENCING WORK WITHIN THE TREE PROTECTION ZONE - AUTHORIZATION IS REQUIRED FROM A REPRESENTATIVE OF THE CITY FORESTER'S OFFICE.

CITY OF ROCHESTER

UTILITY TRENCH AT EXISTING TREE

ISSUED 11-20-92

REVISED 7-1-93

NON-STANDARD
DWG.NO.S617-2