


PLAN

12" WHITE OVERLAID PLASTIC PAVEMENT MARKINGS (TOTAL OF 15 LINEAR FEET OF 12" WIDE PAVEMENT MARKINGS REQUIRED FOR EACH ARROW LOCATION)

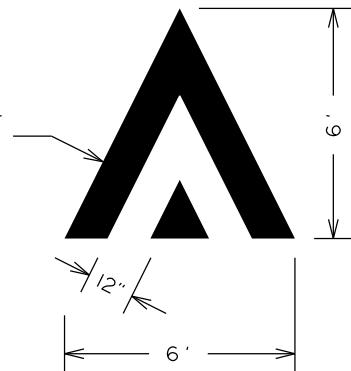

ARROW DETAIL

NOTE :

1. FINISHED SURFACE OF SPEED HUMP AT CENTER POINT WILL BE 2.62 INCHES ABOVE FINISHED PAVEMENT SURFACE.
2. MAINTAIN THEORETICAL CURB AND PAVEMENT GRADES, AND PAVEMENT CROSS-SLOPE THRU SPEED HUMP AREA.
3. TEMPORARY WARNING SIGNS TO BE INSTALLED MINIMUM OF 10 DAYS PRIOR TO COMMENCING CONSTRUCTION OF SPEED HUMP.

CITY OF ROCHESTER		
SPEED HUMP		
ISSUED	1-5-98	NON-STANDARD DWG.NO.S413-I
REVISED	12-1-15	