



ACCESS RAMP TYPE E ISOMETRIC

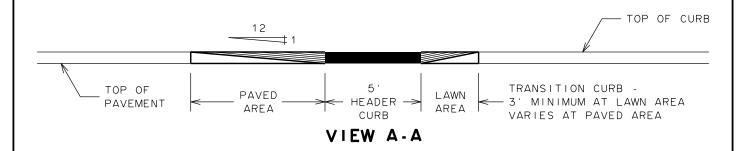

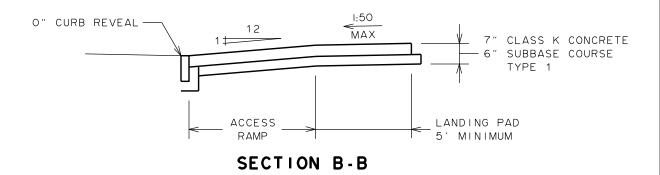

NOTES:

- 1. 1:12 IS MAXIMUM SLOPE OF ACCESS RAMP AND SIDE FLARE IN PAVED AREA.
- 2. SURFACE OF ACCESS RAMP IS TO BE STABLE, FIRM AND SLIP-RESISTANT. TEXTURE SURFACE WITH COARSE BROOM RUNNING TRANSVERSE TO SLOPE OF ACCESS RAMP.
- 3. ENTIRE AREA OF ACCESS RAMP AND LANDING PAD IS TO BE 7 INCH THICK CONCRETE.
- 4. SEE DETAIL \$608-28 FOR DETECTABLE WARNING SYSTEM.

CITY OF ROCHESTER

SIDEWALK ACCESS RAMP TYPE E

ISSUED 3-21-94 NON-STANDARD REVISED 5-1-13 DWG.NO.S608-I3