



ACCESS RAMP TYPE I ISOMETRIC

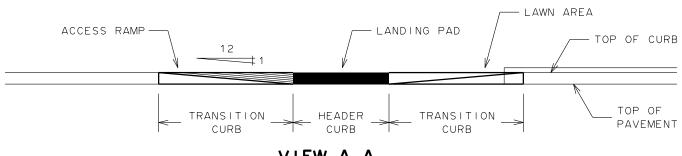

VIEW A-A

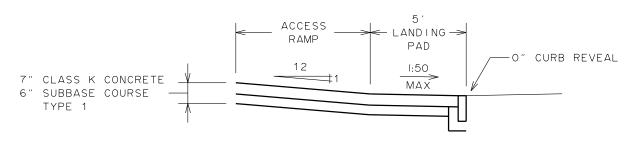

SECTION B-B

NOTES:

- 1. 1:12 IS MAXIMUM SLOPE OF ACCESS RAMP AND SIDE FLARES.
- 2. SURFACE OF ACCESS RAMP IS TO BE STABLE, FIRM AND SLIP-RESISTANT. TEXTURE SURFACE WITH COARSE BROOM RUNNING TRANSVERSE TO SLOPE OF ACCESS RAMP.
- 3. ENTIRE AREA OF ACCESS RAMP AND LANDING PAD IS TO BE 7 INCH THICK CONCRETE.
- 4. SEE DETAIL S608-28 FOR DETECTABLE WARNING SYSTEM.

OF ROCHESTER CITY

SIDEWALK ACCESS RAMP TYPE I

ISSUED	3 - 21 - 94	NON-STANDARD
REVISED	9 - 1 - 12	DWG.NO.S608-38