


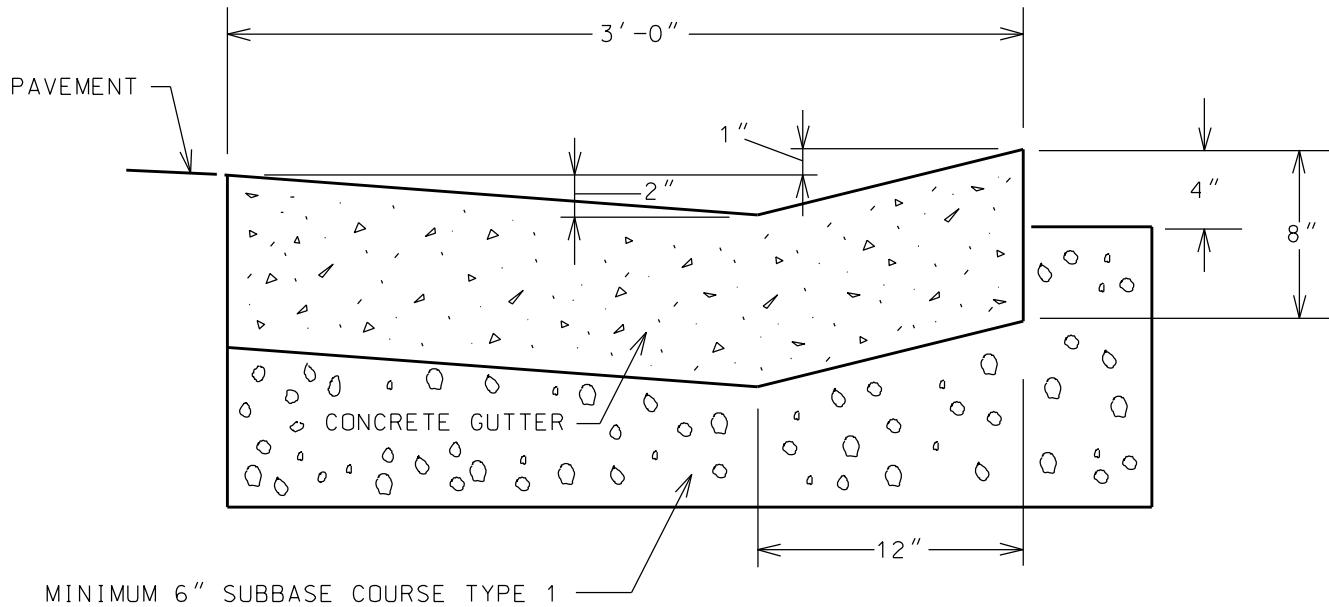

NOTES:

1. USE CLASS K CONCRETE FOR CONVENTIONALLY FORMED GUTTERS, AND CLASS I CONCRETE FOR MACHINE FORMED GUTTERS.
2. CONCRETE GUTTERS ARE TO BE CONSTRUCTED IN 10 FOOT SECTIONS.
3. EXPANSION JOINTS ARE TO BE PROVIDED AT 20 FOOT INTERVALS AND ARE TO BE $\frac{3}{4}$ INCH IN WIDTH.

CITY OF ROCHESTER

CONCRETE GUTTER

ISSUED 9-2-91

STD. DWG.

REVISED 12-6-93

NO. R624-1