



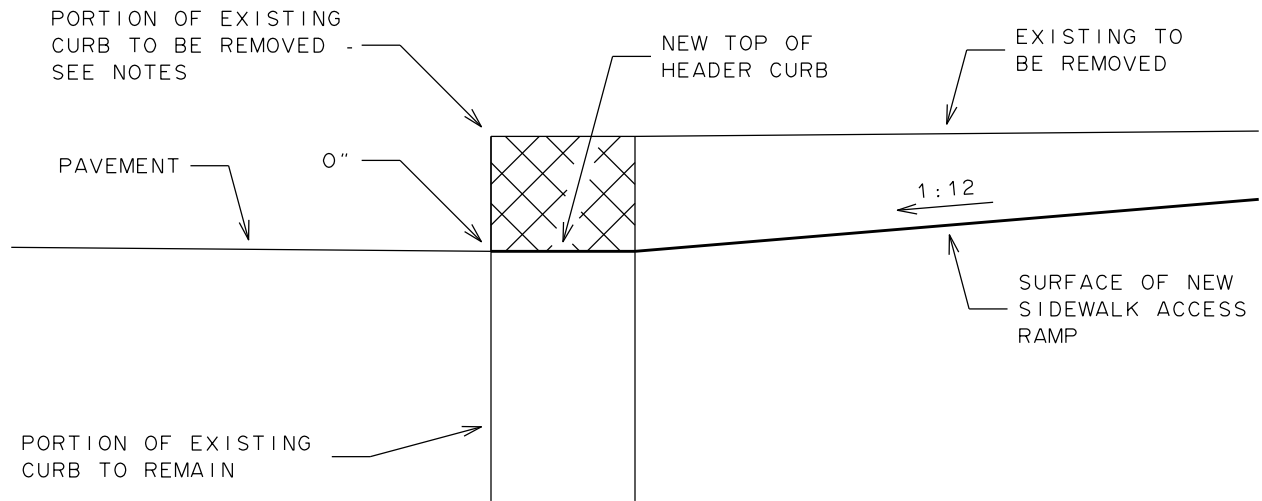

SIDEWALK ACCESS RAMP

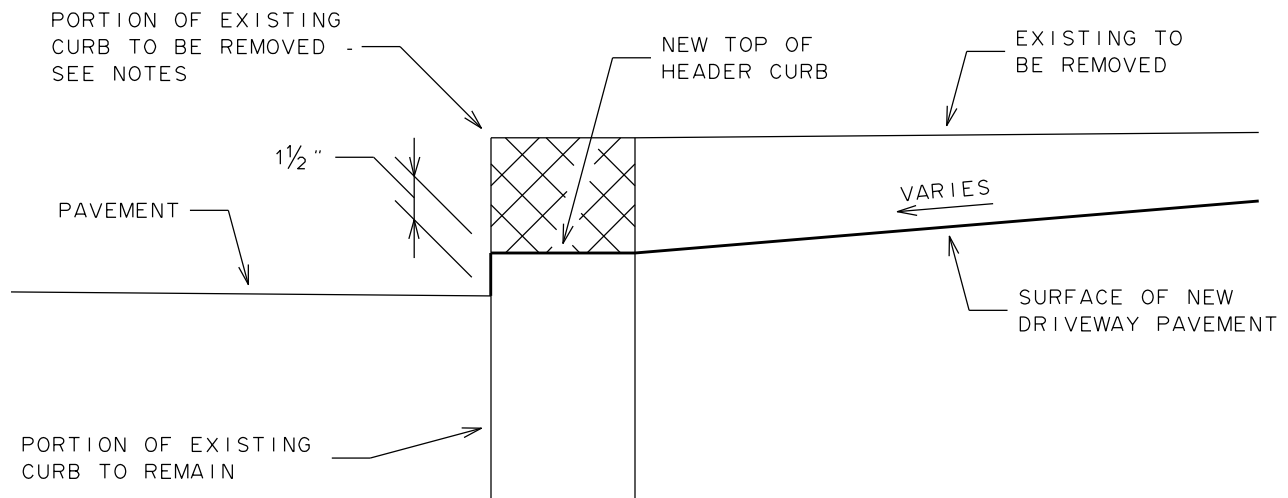

DRIVEWAY

NOTES:

1. RESHAPE TOP OF EXISTING CURB BY SAW CUTTING HORIZONTALLY WITH POWER SAW. SAW CUT FULL WIDTH OF CURB, ALONG NEAT STRAIGHT LINES.
2. TOP OF CURB IS TO BE SAW CUT EITHER FLAT ACROSS, OR ON 1:12 SLOPE.
3. TOP OF CURB IS TO BE MILLED OR GROUND FINISHED TO SMOOTH SURFACE FREE FROM BURRS, NICKS OR OTHER MARKINGS OR DAMAGE FROM SAW CUTTING OPERATION.
4. CURB JOINTS ARE TO BE RE-POINTED WITH MASONRY MORTAR MIX.

CITY OF ROCHESTER

RESHAPE EXISTING CURB

ISSUED	4-7-95	NON-STANDARD
REVISED	12-1-15	DWG.NO.S609-9