




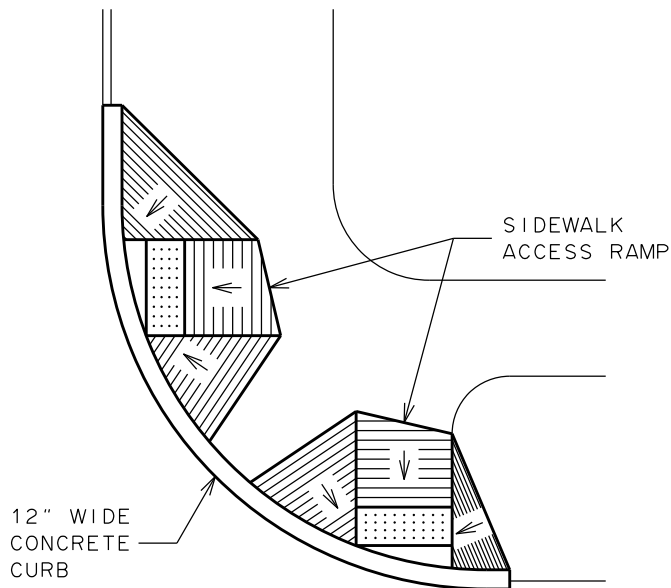

MULTIPLE RAMPS

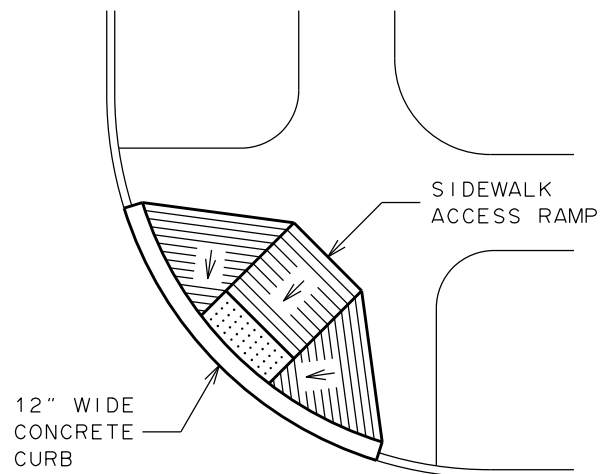

SINGLE RAMP

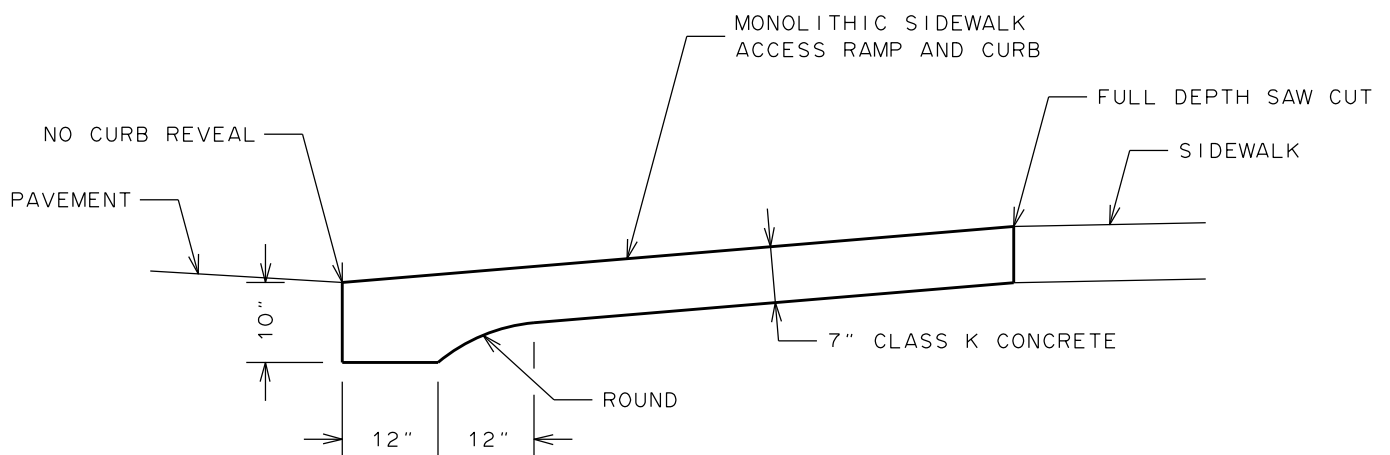

SECTION

NOTES:

1. 1:12 IS MAXIMUM SLOPE OF ACCESS RAMP AND SIDE FLARES.
2. SURFACE OF ACCESS RAMP IS TO BE STABLE, FIRM AND SLIP-RESISTANT. TEXTURE SURFACE WITH COARSE BROOM RUNNING TRANSVERSE TO SLOPE OF ACCESS RAMP.
3. USE JOINTING TOOL WITH $\frac{5}{8}$ INCH RADIUS TO FINISH ALL JOINTS AND EDGES OF CURB.
4. ENTIRE AREA OF ACCESS RAMP AND LANDING PAD IS TO BE 7 INCH THICK CONCRETE.
5. SEE DETAIL S608-28 FOR DETECTABLE WARNING SYSTEM.

CITY OF ROCHESTER

**MONOLITHIC
SIDEWALK ACCESS
RAMP AND CURB**

ISSUED 10-22-01

REVISED 6-30-12

NON-STANDARD
DWG.NO.S608-26