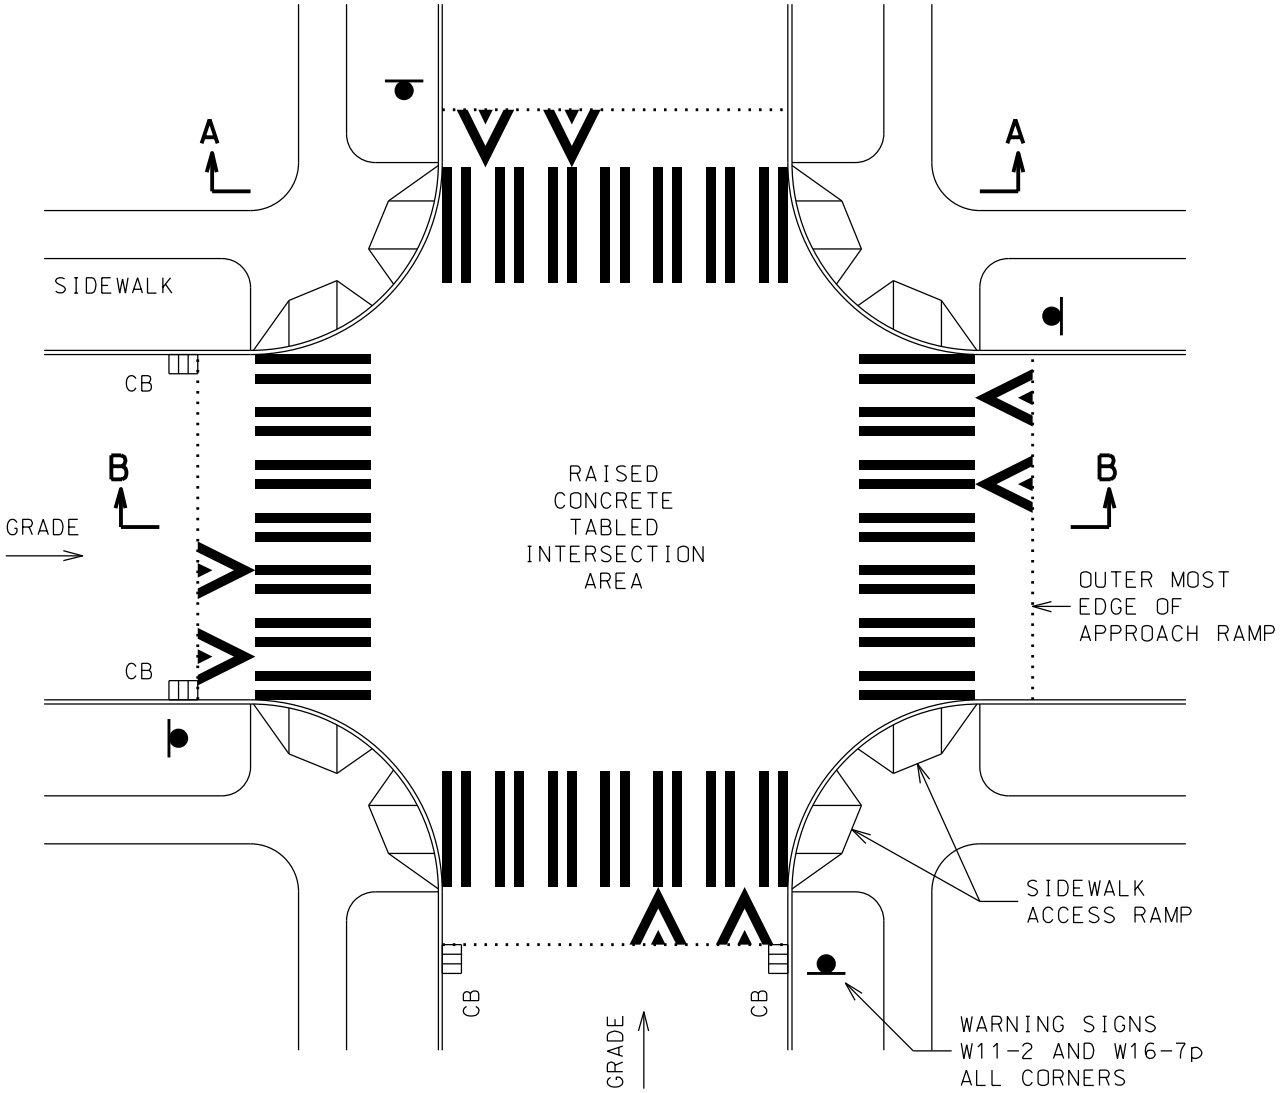

PLAN

12" WHITE OVERLAID
PLASTIC PAVEMENT MARKINGS
(TOTAL OF 15 LINEAR FEET OF
12" WIDE PAVEMENT MARKINGS
REQUIRED FOR EACH ARROW
LOCATION)

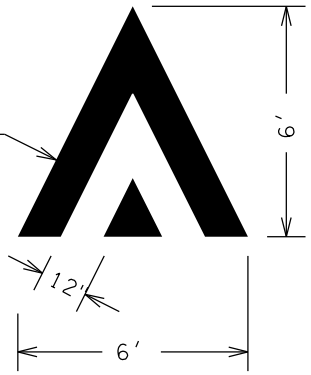

ARROW DETAIL

NOTES:

1. FINISHED SURFACE OF TABLED INTERSECTION AREA WILL BE 3 INCHES ABOVE FINISHED PAVEMENT SURFACE.
2. COLOR AND PATTERN OF TABLED INTERSECTION AREA, RAISED CROSSWALK AREAS AND APPROACH RAMPS WILL BE AS SPECIFIED IN CONTRACT DOCUMENTS.
3. MAINTAIN THEORETICAL CURB AND PAVEMENT GRADES, AND PAVEMENT CROSS-SLOPE THRU TABLED INTERSECTION AND RAISED CROSSWALK AREAS.
4. CATCH BASINS ARE TO BE LOCATED ON UPHILL SIDE(S) OF TABLED INTERSECTION AREA.

CITY OF ROCHESTER

TABLED INTERSECTION

ISSUED	8-2-05	NON-STANDARD
REVISED	7-19-11	DWG.NO.S415-1