


12" WIDE WHITE  
PREFORMED THERMOPLASTIC  
REFLECTORIZED PAVEMENT  
MARKING SYMBOL

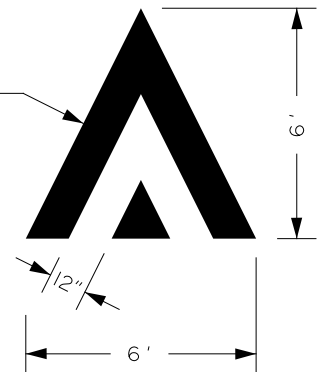

**CHEVRON  
SYMBOL**

**NOTES :**

1. TOP OF SPEED HUMP IS TO BE PARABOLIC WITH CENTER 3.50 INCHES ABOVE FINISHED GRADE. SEE DETAIL S413-3 FOR SECTIONS A-A AND B-B.
2. MAINTAIN THEORETICAL CURB AND PAVEMENT GRADES, AND PAVEMENT CROSS-SLOPE THRU SPEED HUMP AREA.
3. TEMPORARY WARNING SIGNAGE IS TO BE INSTALLED MINIMUM OF 10 DAYS PRIOR TO COMMENCING CONSTRUCTION OF SPEED HUMP.
4. SPEED HUMPS SHALL NOT BE PLACED OVER CASTINGS SUCH AS MANHOLES, VALVE BOXES, ETC.
5. WHENEVER POSSIBLE SPEED HUMPS SHALL BE PLACED ADJACENT TO STREET LIGHT POLES.
6. CHEVRON SYMBOLS ARE TO BE PLACED AS SHOWN ON APPROVED PLANS, AND CAN BE ADJUSTED AS REQUIRED BY RESIDENT PROJECT REPRESENTATIVE, AND IN NO INSTANCE ARE THEY TO ENCROACH INTO PARKING LANE.
7. SEE DETAILS S413-4 AND S413-5 FOR SIGNAGE.

CITY OF ROCHESTER

**SPEED  
HUMP**

ISSUED	1-5-98	NON-STANDARD DWG.NO.S413-I
REVISED	12-9-21	