


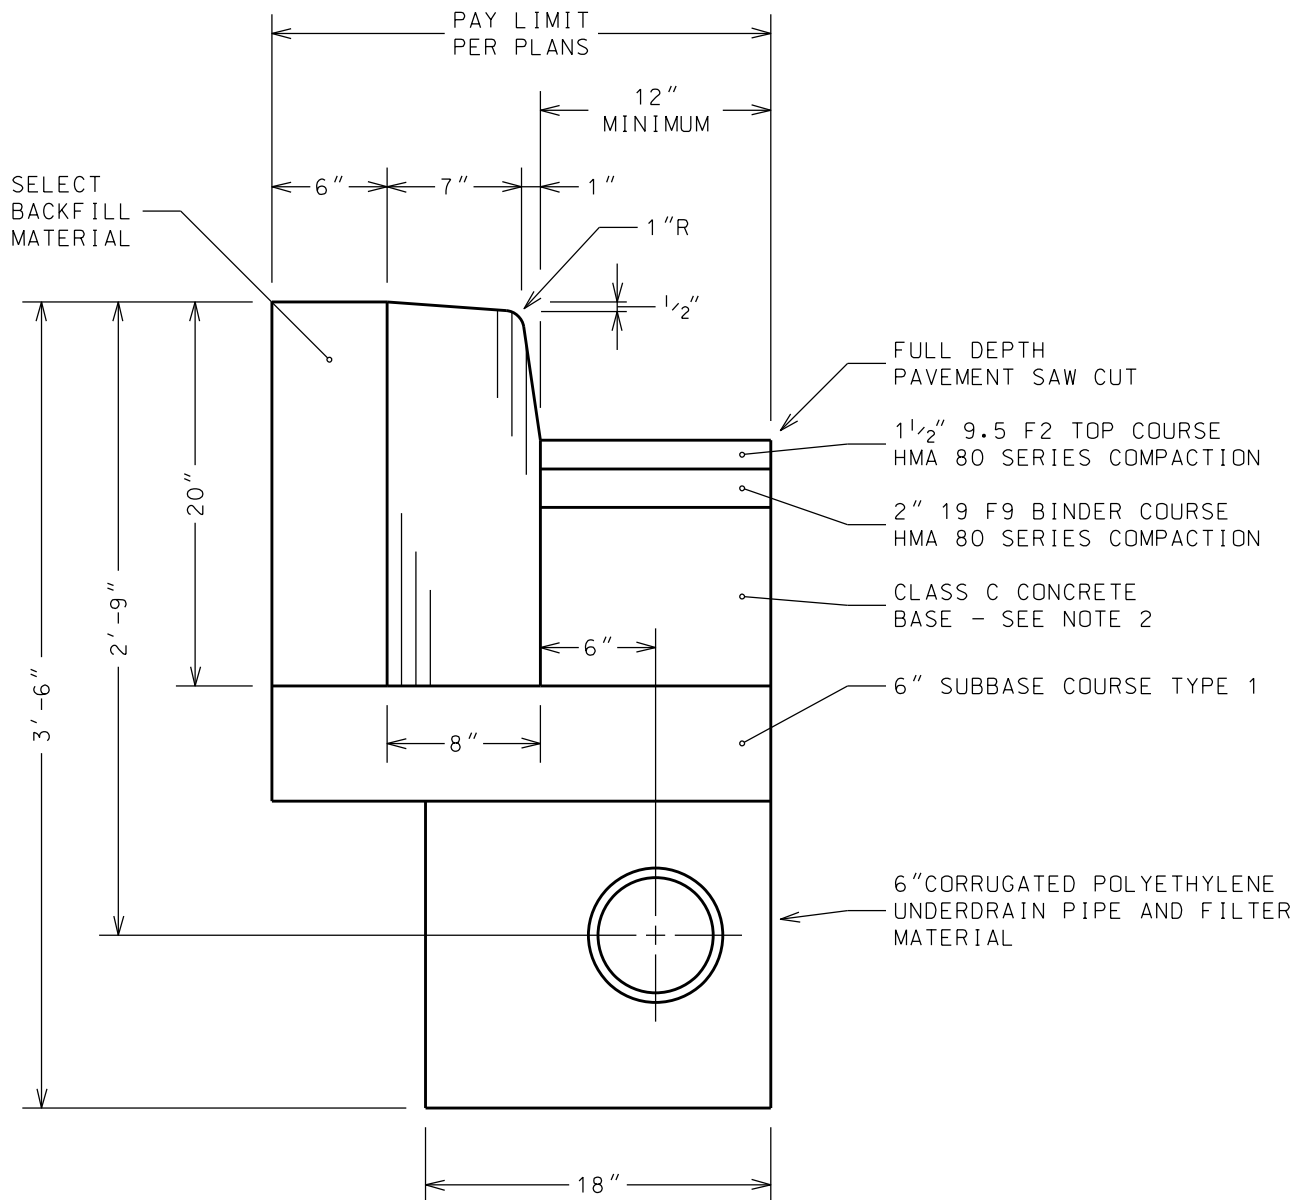

NOTES:

1. USE CLASS K CONCRETE FOR CONVENTIONALLY FORMED CONCRETE CURB - CLASS J CONCRETE FOR MACHINE FORMED CONCRETE CURB.
2. BOTTOM OF CONCRETE CURB AND CONCRETE BASE TO BE AT SAME ELEVATION.
3. EXPANSION JOINTS TO BE 3/4" WIDE SPACED EVERY 20 FEET AND AT ALL IMMOVABLE OBJECTS. FILL JOINTS WITH PREMOLDED RESILIENT JOINT FILLER MATERIAL.
4. CURB REVEAL FOR HEADER CURB AT DRIVEWAY APRONS IS 1 1/2" INCHES, AT SIDEWALK ACCESS RAMPS 0 INCHES.
5. TACK COAT TO BE APPLIED BETWEEN ALL LIFTS OF HMA COURSES AND ON TOP OF CONCRETE BASE.
6. PAVEMENT SEAMS TO BE SEALED WITH BITUMINOUS SEALER IN ACCORDANCE WITH NYSDOT MATERIAL DESIGNATION 702-0700.

CITY OF ROCHESTER

CONCRETE CURB REPLACEMENT

ISSUED 9-2-91
REVISED 12-30-11

STANDARD
DWG.NO.R609-6