

# INNER LOOP EAST TRANSFORMATION PROJECT

REMOVE • RESTORE • RECONNECT • REVITALIZE

## DRAFT DESIGN REPORT – Volume 2

PIN 4940.T7

JANUARY 2014



City of Rochester, Department of Environmental Services



New York State Department of Transportation



Federal Highway Administration

Inner Loop East  
From Barrier to Beautiful

 Stantec



<b>Appendices</b>	
<b>VOLUME 1</b>	
A.	Maps, Plans, Profiles & Typical Sections
B.	Project Costs
C.	NEPA Checklist
D.	SEQR Documentation
E.	Non-Standard Feature Justification Forms
<b>VOLUME 2</b>	
F.	Go / No Go Analysis
G.	Traffic Analysis
H.	Accident Analysis
<b>VOLUME 3</b>	
I.	Visual Impact Assessment
J.	Hazardous Waste / Contaminated Material Screening
K.	Air Analysis
L.	Noise Analysis
M.	Smart Growth Screening Tool
N.	Public Involvement
O.	Correspondence



## **APPENDIX F**

### **Go / No Go Analysis**



**Memo****Final****Stantec**

---

To: John Thomas From: William C. Holthoff  
City Of Rochester Rochester (2250) NY Office  
File: Inner Loop 192500170 Date: January 13, 2009  
April 24, 2009 Revised

This document has been revised based on New York State Department of Transportation and Monroe County Department of Transportation comments (attached).

---

## Raising the Eastern Portion of the Inner Loop

### Go/No Go Analysis

#### Introduction

The possibility of raising the eastern portion of the Inner Loop from Main Street to Monroe Avenue/Chestnut Street, to an at-grade boulevard or arterial was first considered and recommended in the "Vision 2000 Plan" prepared in the early 1990's. Since then, a number of additional studies have been completed to assess the potential of raising various segments of the Inner Loop to grade, and the land use implications resulting from such a modification to the City's street grid. The current study is scoped to determine the feasibility of raising the eastern section of the Inner Loop to grade, including a detailed analysis of transportation benefits, possible environmental and social impacts, the life cycle costs of maintaining the existing Inner Loop and its service roads, as well as safety and structural analysis of the retaining walls, bridges and pavement that make up this section of the Inner Loop and the service roads.

Prior to undertaking this costly analysis using public funds, it is prudent to at least undertake an initial traffic analysis to determine if there is a feasible alternative that can maintain or improve traffic operations in the study area if the Inner Loop is reconstructed to an at-grade boulevard or arterial. In addition, whether or not these roadway network changes will have any significant impacts outside the immediate study area should be determined. Thus, this initial study is being completed in order to be able to make a Go/No Go decision on whether to proceed with the significantly detailed and costly study. This memo addresses these issues and provides the supportive analysis and information needed to make a determination on whether to proceed with the more detailed study.

In summary, this memo is intended to address two (2) items:

1. Will raising the eastern portion of the Inner Loop to grade have transportation impacts beyond the existing Inner Loop and adjacent intersections?

2. Is there at least one feasible alternative that would allow the eastern portion of the Inner Loop to be raised to grade without having severe transportation impacts within and around the immediate transportation network, now and in the future?

### **Summary of Findings**

1. The traffic impacts of raising the eastern portion of the Inner Loop will be limited to the eastern Inner Loop area and adjacent intersections;
2. Future growth in traffic in the area will be traffic generated by proposed new developments or redevelopments within the Rochester CBD to the year 2014. After 2014 traffic is forecasted to increase by +0.625% per year, without raising the Inner Loop and if the Inner Loop is raised +0.75% per year (the larger value to reflect redevelopment of land vacated by raising the Inner Loop);
3. Construction of the I-490 Western Gateway Project, underway when most of the updated traffic counts where obtained, had little if any notable impact on travel patterns and traffic volumes in the eastern Inner Loop Area;
4. That Level of Service (LOS) on the existing portion of the eastern Inner Loop and adjacent intersections are and will remain (through the year 2035), LOS of "C" or better with no individual movements below LOS "D";
5. That raising most of the eastern Inner Loop between the Monroe/Chestnut intersection to the East Avenue Intersection to two (2) through travel lanes in each direction, plus a separate left turn lane at major intersections, will maintain the high levels of traffic operations that would exist, if the eastern Inner Loop was not raised;
6. There are at least two (2) alternatives that would maintain high levels of traffic operations if the eastern Inner Loop was raised to grade at Main Street. However, to achieve these levels of traffic operations, the Inner Loop on/off ramp to Main Street would need to be widened from 5 lanes to 8 lanes and the section of University Avenue between South Union Street and Main Street would need to be widened from 5 lanes to either 7 or 8 lanes, depending on the alternative;
7. Due to the proximity of intersections, vehicle storage for the section of University Avenue between South Union Street and Main Street is an issue now, and will remain so into the future, for the existing Inner Loop or a raised Inner Loop.
8. That some of these widening and storage issues at the intersections near Main Street and University Avenue may be reduced by further refinements, acceptance of lower levels of traffic operations, or possibly by using Roundabouts. These and other alternatives will be explored given a Go decision.

9. That accident rates on the mainline section of the Inner Loop do not exceed the statewide average for accidents on this type of highway. However, eight (8) of the eleven (11) adjacent intersections exceed the statewide average and ten (10) of the eleven (11) exceed the Monroe County Accident rate for an at-grade intersection, with a number of these intersections having a high rate of right angle accidents that might be corrected by replacing these intersections with a Roundabout or other alternative improvements.
10. A new I-490 westbound off-ramp to the Inner Loop could:
  - a. Be designed and constructed with a design speed of 25 MPH, 5% super elevation and posted for 20 MPH;
  - b. Would sever the existing pedestrian connection between Monroe Avenue and the South Wedge.
  - c. May attract 300 to 450 vehicles during the morning peak hour. The majority of this traffic (200 to 300) would divert from the I-490 off-ramp to Goodman Street. This traffic uses Broadway to reach this section of the Inner Loop. The remaining traffic would divert from the Clinton Avenue off-ramp;
  - d. The majority of this additional traffic is already traveling within the Inner Loop area. Analysis of this additional traffic on a raised Inner Loop would indicate that levels of traffic operations would remain acceptable (overall LOS "C" with no individual movements below "D");
  - e. That analysis of possible traffic impacts to I-490 (e.g. ramp spacing, decision sight distance, traffic operations) as a result of constructing this ramp, if any, will be identified after the Go decision;
  - f. The cost of constructing this ramp is approximately \$2.6 million;
11. The current estimated construction cost (including professional design and construction inspection services) of raising the eastern Inner Loop to grade between Chestnut/Monroe Avenue to Main Street is \$33.3 million (excluding the new I-490 off-ramp).

### **Recommendations and Conclusions**

Based on the analysis, the following recommendations should be considered related to further study of raising the Inner Loop:

1. **Inner Loop between Chestnut/Monroe and East Avenue** – The analysis did not identify any major travel disadvantages of reconstructing this section of the Inner Loop with a 5 lane arterial or boulevard. Thus, it is recommended that a GO decision be made and allowing a more detail analysis of this section to progress.

2. **Inner Loop at Main Street** – Analysis indicates two traditional intersection alternatives that would maintain reasonable traffic operations if the Inner Loop was brought to grade at Main Street. Both alternatives, however, would require significant road widening to the existing Inner Loop Main Street ramps and the section of University Avenue between Main Street and South Union Street.

If undertaken, this would free up a significant amount of developable land, however, the impacts of widened streets in this area may not be acceptable. It is recommended that the concept of raising the Inner Loop at Main Street be carried forward into the next phase to determine whether other alternatives, such as Roundabouts, or diverting University Avenue traffic to the Scio Street interchange, may reduce these impacts to a more acceptable level. If not, consideration of raising the Inner Loop at Main Street should be documented and dropped from further consideration.

3. **Westbound I-490 off-ramp to the Inner Loop** – Review of this ramp indicates that it could be constructed; however, it would need to operate at a very low speed and sever a pedestrian connection between portions of the city. If this ramp is still considered an important addition to the highway network, then an analysis to determine any possible impacts of this low speed ramp to the I-490 mainline should be undertaken. If these impacts are acceptable, then discussions with FHWA should be undertaken to determine whether they will consider construction of this low speed ramp from the Interstate highway.

The remainder of this memo documents the process, analysis and findings in much greater detail.

**STANTEC CONSULTING SERVICES INC.**

  
William C. Holthoff  
Senior Associate  
[bill.holthoff@stantec.com](mailto:bill.holthoff@stantec.com)

## Raising the Eastern Inner Loop – Go/No Go Analysis

### Background

The concept of the Inner Loop was developed in the 1960s. The concept and eventual implementation was to assist in distributing traffic in and around the Rochester Central Business District (CBD) as a result of construction of the I-490 expressway, as well as the future extension of I-390 to the CBD area. Since that time, the Inner Loop was constructed, as was I-490; however, the extension of I-390 to the CBD has not and never will be constructed. While many sections of the Inner Loop have served their purpose (i.e. distributing traffic in and around the Rochester CBD) and are valid links to maintain reasonable traffic operations in this area, the lightly used eastern portion of the Inner Loop that consists of 10 to 12 travel lanes associated with both the Inner Loop and the service roads that parallel it, has not.

This lightly used section of the Inner Loop is most likely the result of not extending I-390 to the Rochester CBD. Thus the question, should this section, which serves little, if any, transportation purpose and creates a barrier for pedestrian, bicyclist and motor vehicles, continue to exist? Also, the costs required to maintain 10 to 12 lanes of highway, four bridges, 8 traffic lights and as well as the opportunity costs of the land in the area that could be developed for other purposes should be considered.

### Inner Loop Study Area

Concerns have been raised as to what traffic impacts might result from raising the eastern end of the Inner Loop on other area highways. In particular, on the expressway system and other arterials serving the Rochester Central Business District (CBD). If traffic increased significantly on other highway segments as a result of raising the Inner Loop, then the study area for this project would need to enlarged to address any traffic impacts that resulted.

To address this concern, the Genesee Transportation Council (GTC) Regional Travel Forecasting Model was employed. The forecasting model was run with and without the Inner Loop being raised for the year 2014, the year being used to analyze all the different proposed land use changes within the CBD. The resulting forecasted travel volumes were then compared at major segments of the highway system, with the Inner Loop being raised and without raising it, to determine any major traffic volume changes away from the Inner Loop that would occur.

The analysis, presented in Attachment A, compared segments of the expressway system, major arterials and Genesee River Bridge Crossings. The analysis found any traffic impact resulting from raising the Inner Loop to be in the immediate area adjacent to the section of Inner Loop being raised. Raising the Inner Loop will have no notable traffic impacts to the expressway system, their interchanges, or on major arterials surrounding or serving the Rochester CBD. Thus, the study area for determining the traffic impacts is at intersections with the Inner Loop and those immediately adjacent to them.

### **Growth in Traffic - 20 Years after Reconstruction**

Review of the travel patterns generated by the GTC Regional Forecasting model for the years 2005 to 2014 reflects all the planned land use changes in and around the Rochester Central Business District (CBD). While change in traffic between 2005 and 2014 does vary depending on what roadway section was reviewed, at most it shows an increase of 10%. Traffic growth along most roadway sections is less than 5% (or 0.625 per year) during the 8 year period forecasted.

Thus, to determine Inner Loop travel at ETC+20 or for the year 2035, the following was done:



1. The base traffic counts taken in 2008 were used to forecast future traffic volumes to 2035;
2. MCDOT created a future (2014) traffic file to reflect all the land use changes proposed for the CBD. These projections where used to forecast traffic to 2014;
3. The 2014 traffic forecasted by MCDOT was then increased by 0.625% per year to 2035 (ETC+20) using a straight percentage increase for traffic using the existing Inner Loop (without it being raised)
4. For a raised Inner Loop, a higher percentage was used (0.75% per year) to forecast traffic using a raised Inner Loop to the year 2035. The higher percentage increase used for a raised Inner Loop reflects additional traffic from development of the lands available by removing the Inner Loop.

This method of forecasting future travel for the Inner Loop was presented, reviewed and accepted by the Steering Committee.

### **Impact of Western Gateway Project (I-490 Reconstruction)**

The traffic counts used to analyze the potential traffic impacts were obtained during the summer of 2008 while the I-490 Western Gateway Project was under construction, which had various restrictions and lane as well as ramp closures. To determine the possibility that the Western Gateway Project may have changed travel patterns of vehicles using the eastern Inner Loop and as such would affect the results, additional traffic counts were taken at the Monroe/Chestnut interchange with the Inner Loop, including the Inner Loop Main Line. These counts where taken after all I-490 Western Gateway Project lanes and ramps were reopened to traffic. The counts were taken on Thursday, 12/4/08 and the results were compared to counts taken during the months of June and August of 2008. Minor differences of traffic getting on or off the Inner Loop at Monroe/Chestnut were found, however there was little notable change in traffic using the Inner Loop itself. As a result, the traffic volumes using the Inner Loop and adjacent intersections analysis were adjusted to reflect the higher, but minor changes in traffic volumes.

The following figures compare the intersection turning movement counts taken while construction was occurring on the I-490 Western Gateway Project and those counted after all sections of I-490 were open to traffic. Overall, the comparison shows that the I-490 Western Gateway Project, which was under construction at the time many of the traffic counts were obtained, had little notable impact on travel behavior in the eastern portion of the Inner Loop.

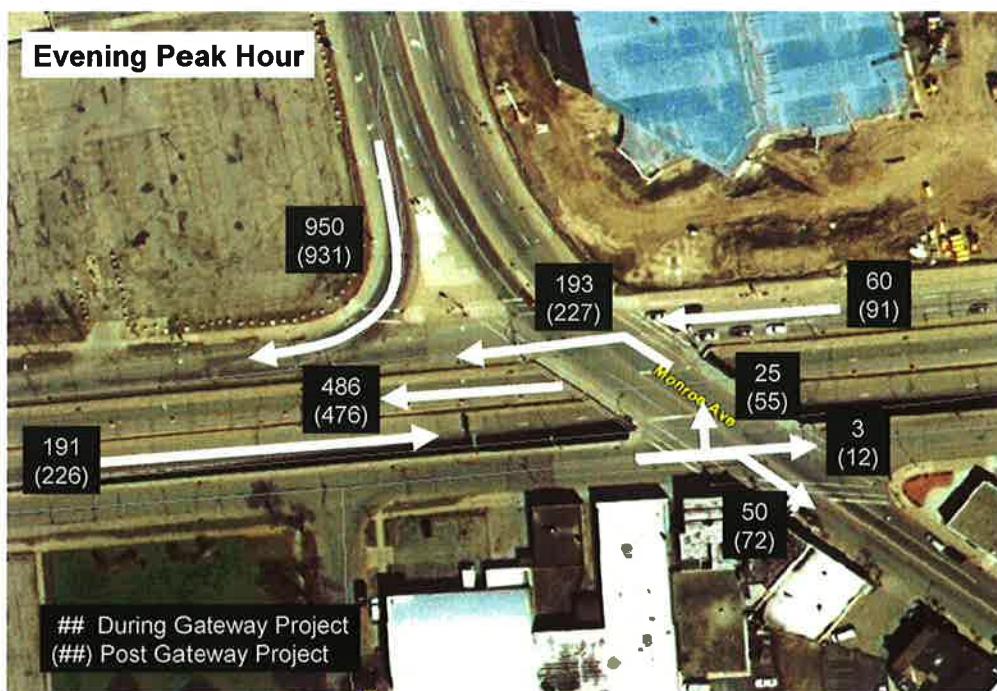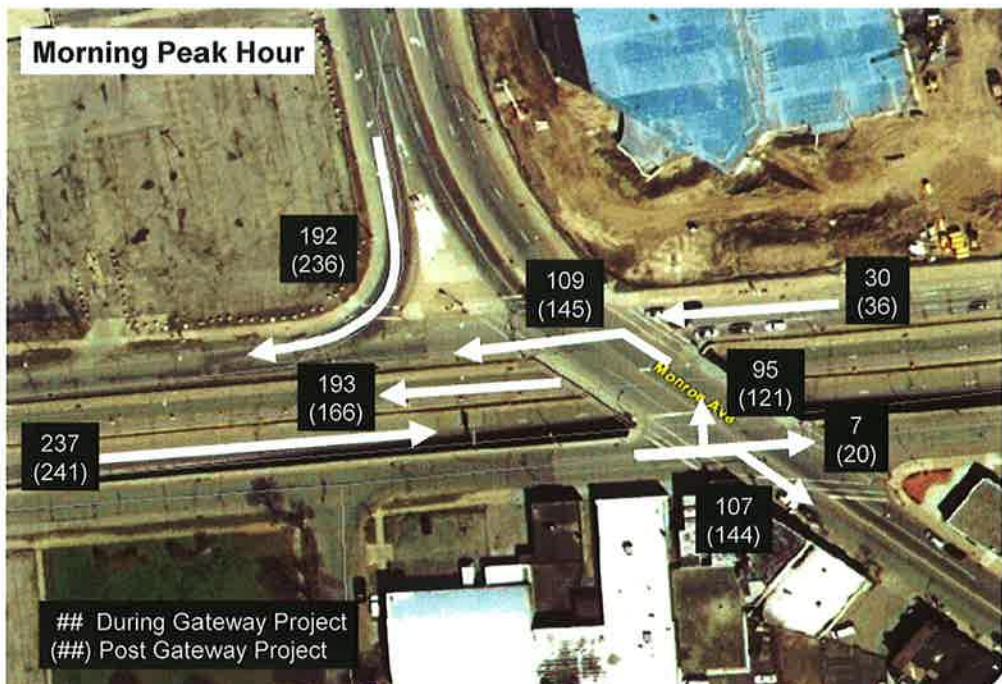

## Present and Future Traffic Operations

### 2008 Traffic Operations

Updated (2008) traffic turning movement counts were obtained during the weekday morning and evening peak travel hours along the eastern Inner Loop and adjacent intersections. Heavy vehicle data was also obtained at each of the locations and reflected in the analysis. This information was then used to determine current operating conditions. The analysis found that the Level of Service at all Inner Loop and adjacent intersections are operating well; all with Level of Service (LOS) of "C" or better with no turning movement below LOS "D".

### 2035 Future Traffic Operations

Again, all intersections were found to provide of LOS "C" or better with no turning movements below LOS "D".

### Traffic Operations - Raised Inner Loop

In order to be able to make a Go Decision, at least one alternative layout needs to be identified. This alternative will maintain reasonable levels of operation in the area (LOS "D" for intersection and turning movements). For this level of analysis, a reasonable alignment was chosen (generally following Union Street corridor). Using this corridor alignment, two (2) options were explored. The first option includes raising the Inner Loop from Monroe/Chestnut to East Avenue only (Option 1). The second option extends raising the Inner Loop to Main Street with two (2) sub-options; one without re-connecting University Avenue (Option 2), the other with the re-connection of University Avenue (Option 4).

The analysis shows LOS "C" or better could be maintained with no turning movements below LOS of "D" for all alternatives and sub-options, provided additional improvements are made at Main Street and University Avenue.

To achieve these levels of traffic operations would require:

- Generally, two (2) through lanes on the raised Inner Loop portion between Monroe Avenue and University Avenue with separate left turn lanes at intersections. These improvements are consistent for all alternatives.
- If the Inner Loop is not raised at Main Street, then no further improvements would be required at the intersection of Main Street and at the South Union Street Intersection with University Avenue.
- Raising the Inner Loop to grade at Main Street, however, would require the Inner Loop on/off ramp to be widened from 5 lanes to 8 lanes for either alternative considered. While no improvement would be required to east/west Main Street, the section of University Avenue between South Union Street and Main Street would need to be widened from 5 lanes to 7 lanes if the two sections of

University Avenue are not reconnected. If University Avenue is reconnected, a 4 lane new road connection would be needed.

The following 5 figures present the lane configuration needed to maintain LOS at each key intersections. Note that some of these widening and storage issues may be reduced by further refinement, acceptance of lower levels of traffic operations, or possibly by using Roundabouts.

**Chestnut/Monroe/Raised Inner Loop  
(Option 1, 2 and 4)**




**East Avenue, Broad Street/Raised Inner Loop  
(Option 1, 2 and 4)**




Option 1 - Main/University-Inner Loop Not Raised



Option 2 - Main/University-Raised Inner Loop

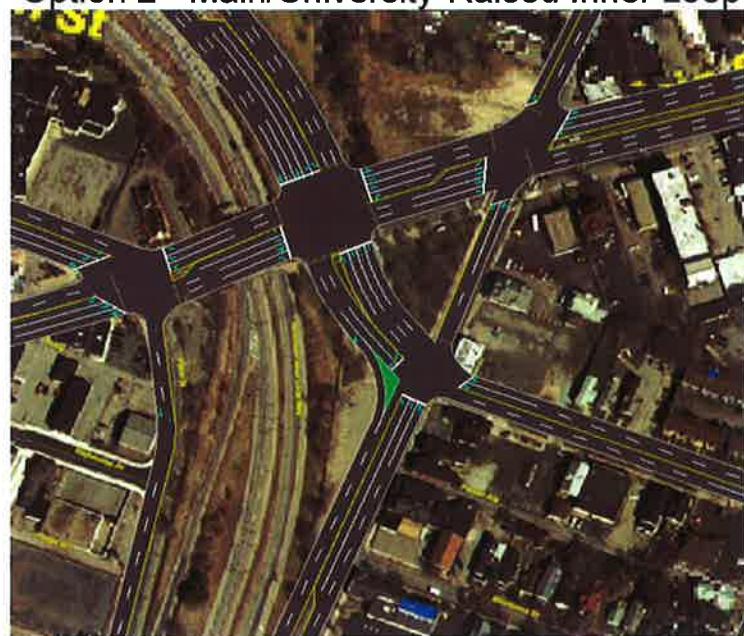

**Option 4 - Main/University-Raised Inner Loop  
Re-Connected University Avenue**

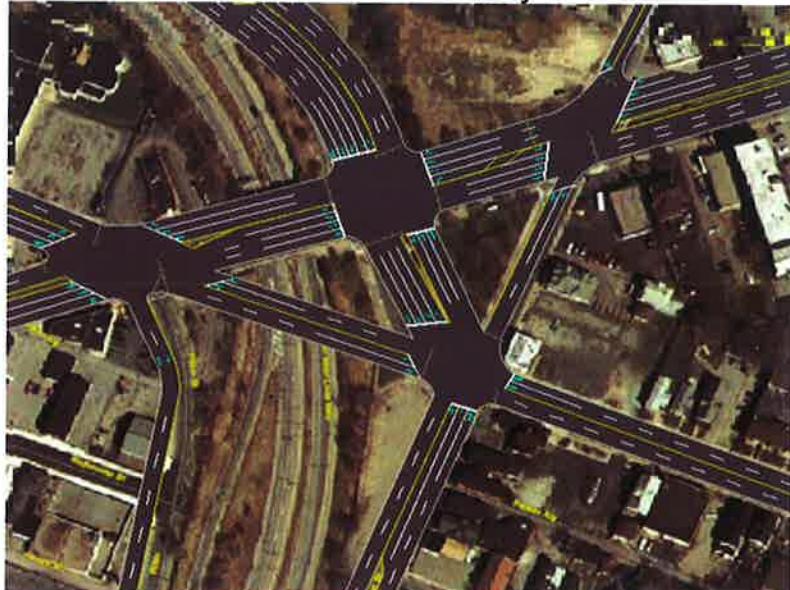

The following table summarizes the overall intersection results. A detailed LOS by turning movement is presented in Attachment C, and the Synchro analysis files are contained in the attached CD.

**Intersection Queuing Analysis**

While each individual intersection was found to provide a reasonable LOS, the possibility that these levels of operation could not be achieved because of the lack of vehicle storage between intersections, or the various vehicle turning lanes, was also explored. Overall, the queue lengths were found to be less than the available storage lengths available for 2008 conditions and 2035 conditions for both the existing Inner Loop and for most options under a raised Inner Loop. The area with the least amount of vehicle storage between intersections, however, is on University Avenue between Main Street and South Union Street. A queuing analysis table is presented in Attachment C.

**Stantec**

January 13, 2009, Rev. 4/24/2009  
 Inner Loop 1925000170  
 Page 12 of 18

**Overall Level of Service**

Intersection	2008				2035							
	AM		PM		AM		PM					
Existing	Option 1	Option 2	Option 4	Existing	Option 1	Option 2	Option 4	Existing	Option 1	Option 2	Option 4	
Monroe Avenue & Inner Loop EB Ramps	B	INTERSECTION REMOVED	A	INTERSECTION REMOVED	B	INTERSECTION REMOVED	A	INTERSECTION REMOVED	A	B	C	D
Monroe Avenue & Inner Loop WB Ramps	A	B	SAME AS OPTION 1	A	B	SAME AS OPTION 1	B	B	SAME AS OPTION 1	A	B	C
Monroe Avenue & Union Street	B	SAME AS EXISTING	A	SAME AS EXISTING	B	SAME AS EXISTING	B	SAME AS EXISTING	B	C	D	E
Union Street & Broad/Court Street	C	A	SAME AS OPTION 1	B	A	SAME AS OPTION 1	C	A	SAME AS OPTION 1	B	C	D
Pitkin Street & Broad/Court Street	A	INTERSECTION REMOVED	B	INTERSECTION REMOVED	A	INTERSECTION REMOVED	B	INTERSECTION REMOVED	B	C	D	E
Union Street & East Avenue	A	B	SAME AS OPTION 1	A	B	SAME AS OPTION 1	A	B	SAME AS OPTION 1	B	C	D
Pitkin Street & East Avenue	B	INTERSECTION REMOVED	B	INTERSECTION REMOVED	B	INTERSECTION REMOVED	B	INTERSECTION REMOVED	B	C	D	E
University Avenue & Union Street	A	B	B	B	B	B	A	A	B	B	B	B
Main Street & Union Street	B	C	B	B	C	C	B	B	B	C	C	C
Main Street & Inner Loop Ramps	C	C	C	C	C	C	C	C	C	C	C	C
Main Street & University Avenue/Pitkin Street	B	B	C	B	B	C	B	B	C	B	B	C

### **Measure of Effectiveness**

Synchro traffic analysis software provides a number of performance measures for comparison of network alternatives. Some of these measures include vehicle stops, delay, travel time, average speed and emissions. It should be noted that these measures represent the entire network evaluated including the free flow expressway traffic as well as the at grade signalized and unsignalized intersections. Performance measures, which are presented in the following table, were obtained on a simulated traffic network (60 minutes) during each peak hour for each alternative considered. The table shows that some network performance measures are better for some alternatives than for others. In some cases better than can be achieved under the No-Build option. This, in spite of the fact that raising the Inner Loop would result in higher traffic volumes generated by new adjacent development and that free flow traffic on existing Inner Loop would now have to travel through three (3) or four (4) at-grade traffic signal controlled intersections.

### Sim Traffic MOE's (60-minute Interval)

	<u>AM Peak Hour</u>					<u>PM Peak Hour</u>				
	Overall Inner Loop Area		Overall Inner Loop Area			Overall Inner Loop Area		Overall Inner Loop Area		
	<b>Existing Conditions - 2008</b>	<b>No Build - 2035</b>	<b>Raised Inner Loop - 2035 Option 1</b>	<b>Raised Inner Loop - 2035 Option 2</b>	<b>Raised Inner Loop - 2035 Option 4</b>	<b>Existing Conditions - 2008</b>	<b>No Build - 2035</b>	<b>Raised Inner Loop - 2035 Option 1</b>	<b>Raised Inner Loop - 2035 Option 2</b>	<b>Raised Inner Loop - 2035 Option 4</b>
Total Delay (hr)	132.8	170.8	191.3	336.3	472.2	162.1	311	<b>255.1</b>	385.6	432.6
Delay / Veh (s)	143.7	155.7	171.2	289.5	434.1	548	602.7	<b>452.3</b>	643.8	847.3
Stop Delay (hr)	108.6	136.6	152.8	298.3	432.4	126.5	263.3	<b>202.7</b>	331.6	373.9
Stop Delay / Veh (s)	117.6	124.5	136.7	256.8	397.5	427.5	510.1	<b>359.4</b>	553.7	732.3
Total Stops	13887	17691	18928	19463	21258	17571	22779	24151	24615	28271
Stop / Veh	4.18	4.48	4.7	4.65	5.43	16.5	12.26	<b>11.89</b>	<b>11.42</b>	15.38
Travel Dist. (mi)	3700.1	4438	4820.4	4668.8	4626.8	4938.3	5112	5680	5405.3	5463.5
Travel Time (hr)	271.7	335	367.9	509.1	644.5	345.2	497	<b>466.5</b>	587.6	637.4
Avg Speed (mph)	14	13	<b>14</b>	13	10	14	12	12	12	9
Fuel Used (gal)	175.7	210.3	226	251.1	282.3	227.6	266.2	270.8	291.3	302.3
Fuel Eff. (mpg)	21.1	21.1	<b>21.3</b>	18.6	16.4	21.7	19.2	<b>21</b>	19.1	18.1
HC Emissions (g)	2401	2818	3316	3581	3909	2418	2515	2716	<b>2493</b>	2536
CO Emissions (g)	78934	89440	95334	95621	101307	86888	87009	88298	<b>81856</b>	81739
NOx Emissions (g)	7656	8948	9839	9125	9270	8450	8707	9312	8700	<b>8660</b>

**NOTE:** - Bold represents the more efficient option in comparison to 2035 No-Build geometry.

### **Inner Loop Accident Analysis and Major Non-Standard Features**

The existing Inner Loop consists of a number of non-standard highway features that could contribute to accidents within the corridor. These are:

1. What might be considered diamond interchanges at the Inner Loop with the intersections of East Avenue, Broad Street and Chestnut/Monroe Avenue (short section two traffic signals);
2. Blind slip ramps to the Inner Loop between Broad Street and Chestnut /Monroe Avenue;
3. The merge, weave section from the two lane on-ramp from southbound Chestnut Street to the two lane Inner Loop to reach the loop ramp to South Clinton Avenue, I-490 eastbound and I-490 westbound.

To determine if this is true for the eastern Inner Loop, an accident analysis was undertaken and the detailed analysis and accident diagrams are contained in Attachment B and summarized in the following table.

The table shows the locations experiencing accidents above state or county wide accident rates. These locations are highlighted in red for those exceeding the State-wide rates.

The detailed analysis of eastern Inner Loop mainline sections found the overall accident rate to be 2.48 accidents per million vehicle miles (acc/mvm), which is lower than the statewide accident rate of 2.72 acc/mvm for Principal Arterial Expressway. The majority of these accidents were found to occur along the horizontal curve between East Main Street and East Avenue. Thus, these sub-standard features do not appear to be causing an accident rate that would exceed those expected to be found on a Principal Arterial Expressway

Of the eleven (11) at-grade adjacent intersections examined in this analysis, only 3 intersections had an accident rate below the statewide accident rate and only 1 below the Monroe County average accident rate (East Main Street at University/Pitkin Street).

Further study will be required to determine if raising the Inner Loop will assist in reducing these intersection accidents, in particular the high proportion of right angle accidents on South Union Street at the intersections with Monroe Avenue, East Avenue and University Avenue. Consideration of the use of a Roundabout at the raised Inner Loop intersection, rather than traffic signal controlled intersections, would assist in eliminating right angle accidents at these intersections.

## ACCIDENT RATES

Intersection		Number of Accidents	State/County Rate	Actual Rate	
<b>Intersection Rate (excludes midblock accidents)</b>					
East Main Street @	<i>University/Pitkin</i>	7	0.26 / 0.46	0.33	ACC/MEV
East Main Street @	<i>Inner Loop/University</i>	40	0.26 / 0.46	<b>0.96</b>	ACC/MEV
East Main Street @	<i>Union Street</i>	23	0.26 / 0.46	<b>0.83</b>	ACC/MEV
Pitkin Street @	<i>East Ave</i>	8	0.34 / 0.22	<b>0.44</b>	ACC/MEV
Pitkin Street @	<i>Broad Street</i>	4	0.34 / 0.22	<b>0.66</b>	ACC/MEV
Union Street @	<i>University Ave</i>	14	0.34 / 0.22	<b>0.65</b>	ACC/MEV
Union Street @	<i>East Ave</i>	17	0.34 / 0.22	<b>1.13</b>	ACC/MEV
Union Street @	<i>Broad St</i>	3	0.19 / 0.22	<b>0.71</b>	ACC/MEV
Monroe Avenue @	<i>Inner Loop/ Pitkin St.</i>	7	0.34 / 0.22	<b>0.26</b>	ACC/MEV
Monroe Avenue @	<i>Howell St.</i>	5	0.34 / 0.22	<b>0.34</b>	ACC/MEV
Monroe Avenue @	<i>South Union St.</i>	20	0.34 / 0.22	<b>1.12</b>	ACC/MEV
<b>Link Rate</b>					
<b>Inner Loop - 940T</b>					
	<i>Rt. 490-E. Main St.</i>	30	2.72	2.48	ACC/MVM
<b>I-490</b>					
	<i>W.of River -E. of Clinton</i>	47	2.72	1.08	ACC/MVM

### New I-490 Westbound Off-Ramp to the Inner Loop Traffic Volumes

Currently, westbound I-490 traffic has two alternatives to reach the east side of the Rochester CBD. First, is to use the Clinton Avenue northbound ramp directly into the heart of the CBD. Second, is to exit at Goodman Street and use Broadway Street and then South Union Street to reach the eastern Inner Loop area. For this second alternative, traffic using the Goodman Street off-ramp, will pass through five (5) traffic signal controlled intersections to reach this area. One of the alternatives to be considered under this study is to create an additional I-490 off-ramp, leading directly to the Inner Loop, which would divert traffic off of Broadway and South Union Street and provide a more direct access to the eastern CBD area.

To determine the volume of traffic that might use this new off-ramp, existing routes and future traffic volumes were reviewed. They show the following results:



#### Broadway to Union to the Eastern Inner Loop Area

Review of northbound traffic on Broadway Street would indicate that possibly around 200 to 300 might be from I-490 westbound during the morning peak hour and these vehicles might use a new westbound I-490 exit ramp to reach areas in the eastern Inner Loop Area (200 northbound through vehicles and 77 left turning vehicles onto Monroe Avenue). During the evening peak travel hour possibly around 150 to 200 vehicles might use this new ramp (100 northbound and 85 turning left to Monroe Avenue).

The traffic impact of this possible change is already included in the base analysis, except at the intersection of Monroe/Chestnut with the Inner Loop. This traffic already passes through or distributes itself to intersections on the northern section.

#### Diversion from South Clinton Avenue I-490 Westbound Exit

This ramp in the morning peak travel period accommodates over 2,000 vehicles per hour. The only real opportunity for this ramp to service traffic on the east side of the Inner Loop is to either turn right onto Woodbury Avenue or right onto Court Street (which provides access to both the Xerox and Midtown parking garages). The majority of parking that serves developments on the east side of the Inner Loop is located east of Chestnut, along Broad and Scio Streets. Thus, most of this traffic that might use a new I-490 eastbound off-ramp to the Inner Loop would most likely

travel on Clinton Avenue, turn right on Court Street, travel eastbound past Chestnut Street. The morning peak hour traffic making this movement is 234 vehicles, not all of which would be expected to be from Clinton Avenue. Thus, a rough estimate of traffic that is currently using the I-490 westbound off-ramp to Clinton Avenue that might be diverted to a new westbound off-ramp to the Inner Loop would most likely be in the neighborhood of 100 vehicles during either the morning or evening peak travel hour.

#### Total Diversion to a New I-490 westbound off-ramp to the Inner Loop

Based on the above rough analysis of possible peak hour diversions to a new I-490 off-ramp to the Inner Loop, this new ramp would be roughly estimated to attract between 300 to possibly 450 vehicles during the morning peak travel period and 300 to 400 vehicles during the evening peak travel hour.

Analysis of this traffic on a raised Inner Loop found that it would not have a notable impact. All intersections were found to continue to operate at LOS "C" with no turning movement below LOS "D".

#### **Attachments**

- A – Inner Loop Study Area Analysis Memo, 9/23/08
- B – Detailed Level of Service Table
- C – Queuing Analysis Table
- D – Accident Summary Memo 12/17/08
- E – Synchro Analysis Files on CD
- F – Agency Comments and Response

## Memo



Stantec

To: John Thomas  
City of Rochester  
File: Inner Loop 192500170

From: William C. Holthoff  
Rochester (2250) NY Office  
Date: October 3, 2008

### Inner Loop Study Area Analysis

This memo will serve to address concerns raised on the order of magnitude of the traffic impacts that may result from raising the eastern end of the Inner Loop. In particular, the effects on the expressway system and other arterials serving the Rochester Central Business District (CBD). If the projected traffic increases on other highway segments are of significance as a result of raising the Inner Loop, then the study area for this project would need to enlarge to address any traffic impacts that may directly result.

To address this concern, the Genesee Transportation Council (GTC) Regional Travel Forecasting Model was employed. The forecasting model was run with and without raising the Inner Loop for the year 2014. This year is being used to analyze all the different proposed land use changes within the CBD. The forecasted traffic volume along major segments of the highway system, with and without raising the Inner Loop was compared to determine traffic volume changes. These segments (see attached map) and traffic changes are shown in the attached tables.

Review of this comparison indicates the following:

#### Expressway System

The following expressway mainline sections were reviewed:

- I-490 on the east side and west side of the CBD;
- NY 590 between Blossom Road and Browncroft Boulevard; and,
- NY 104 between Carter Street and Portland Avenue.

The change in traffic ranged from an increase of +0.55% to a decrease of -0.56%. The largest volume change was a plus +27 vehicles to a -27 vehicles per hour. These insignificant differences are due to random variations within the model instead of the result of raising the Inner Loop. Based on this, raising the Inner Loop would have no impact on these expressways or their associated interchanges.

#### Bridges

Both the Bausch Bridge and the Ford Street bridges over the Genesee River were compared. Traffic volume changes on the Bausch Street Bridge showed an increase of less than 2% (less than 15 vehicles per hour). On the Ford Street Bridge, changes in

traffic ranged from -0.5% (-6 vehicles) to +4.7% (+39 vehicles). These changes are also insignificant and may be the result of random model variations.

### **Arterial System**

#### **East Side**

Forecasted traffic volumes where compared for Main Street, East Avenue and Monroe Avenue between Park Avenue and Goodman Street. The results show some minor impact as a result of raising the Inner Loop. The change in traffic volumes ranged from an increase of +15% to a decrease of -9.3%; however, the net change in east-west travel using these four arterials is reflective of an increase of 2% during the morning and evening peak travel hours.

#### **North Side**

Traffic volumes on Clinton Avenue between Woodbury Boulevard and East Broad Street where compared and the change in traffic volumes range from -0.17% to +2.3%. This is a minor traffic change as a result of raising the Inner Loop.

#### **South Side**

Traffic volumes on South Clinton Avenue and Mt. Hope Avenue between Byron Street and Alexander Street were reviewed. A significant decrease in traffic was identified for southbound traffic on South Clinton Avenue (-21%) and a minor reduction on Mt. Hope Avenue (-3.6%). Further review indicates this being a result of how the model was coded to reflect the raised Inner Loop. The loss of a coded slip ramp from Chestnut Street to the raised Inner Loop appears to have caused these reductions and redistribution of traffic to other routes south of the CBD. In reality, this would not occur, southbound drivers on Chestnut destined to locations south on South Clinton Avenue would continue to use the same ramp. Overall, raising the Inner Loop will have no notable impacts on the south side of the CBD. This minor coding change may also be responsible for changes (increases) on the east side of the Inner Loop and in other areas.

### **Conclusion**

Review and comparison of the forecasted traffic in the year 2014, with and without raising the Inner Loop indicates the traffic impact will remain contained to the immediate adjacent area. Raising the Inner Loop will have no notable traffic impacts on the expressway system, their interchanges, or on major arterials surrounding or serving the Rochester CBD. Thus, the study area for determining the traffic impacts is at the intersections with the Inner Loop and those immediately adjacent to them.

**Stantec**

June 15, 2009  
John Thomas, City of Rochester  
Page 3 of 4

**STANTEC CONSULTING SERVICES INC.**



William C. Holthoff  
Senior Associate  
[bill.holthoff@stantec.com](mailto:bill.holthoff@stantec.com)


cc: Jim Hofmann, Stantec

Memo



Stantec

## Inner Loop Volume Comparison Locations (2014) With and Without Raising the Inner Loop

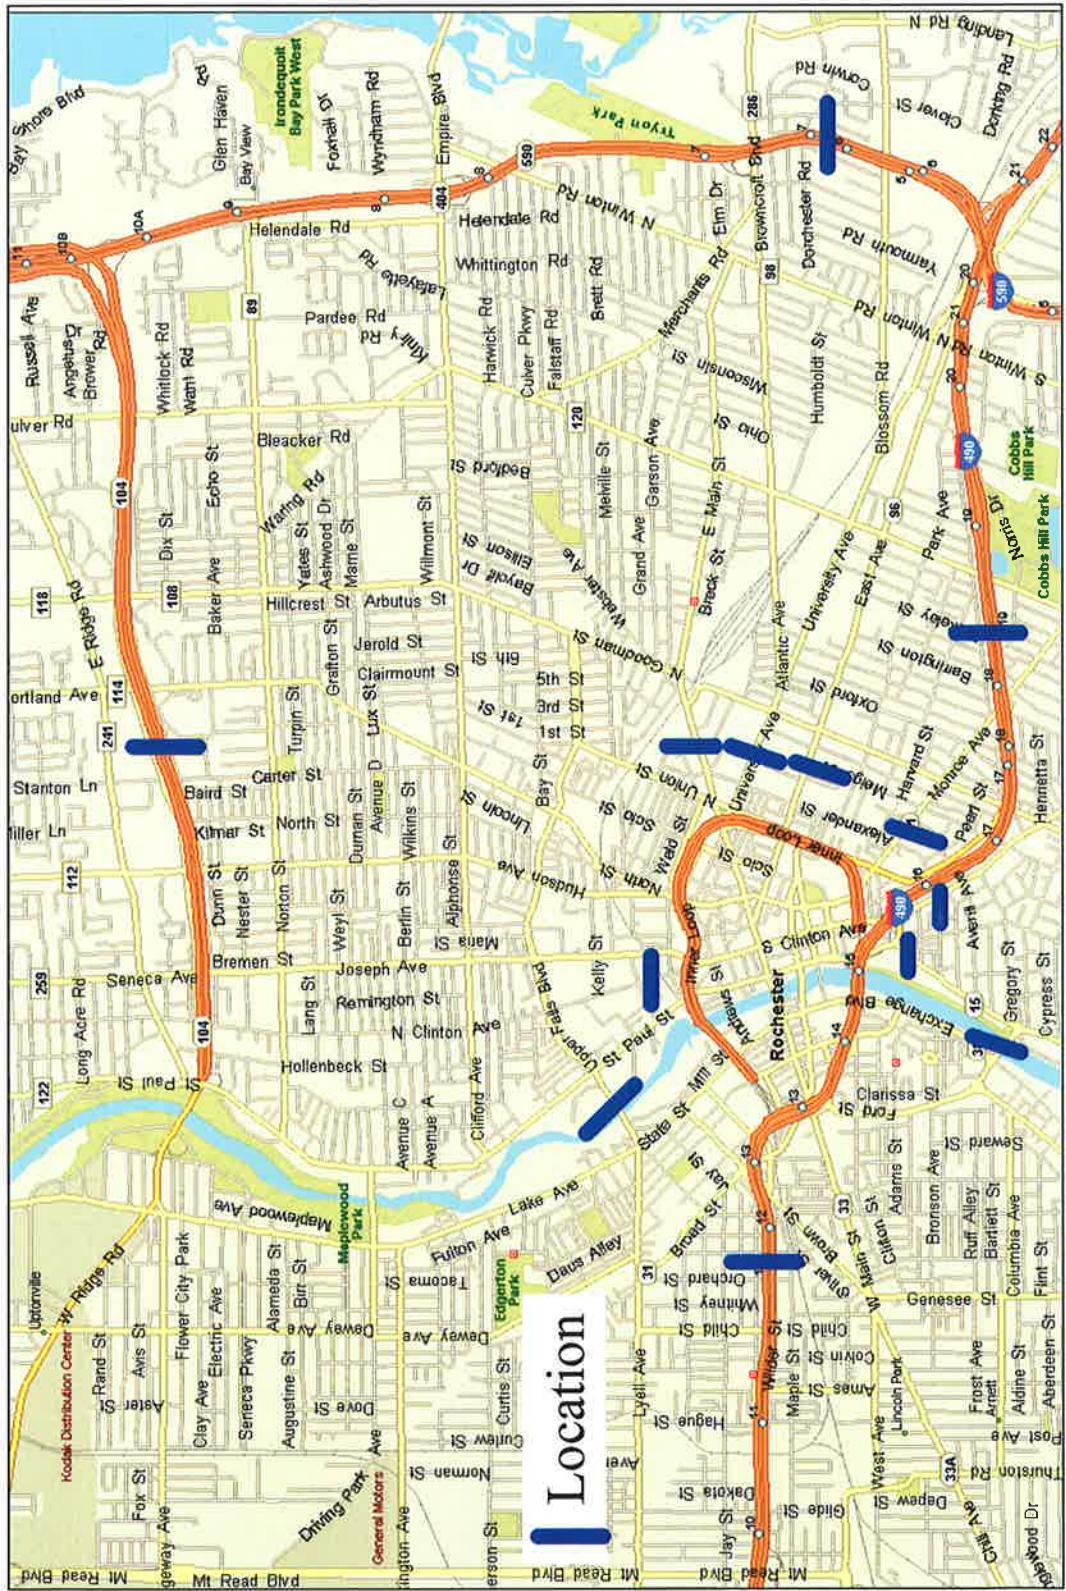

		2035				2040				2045				2050						
Intersection	Approach & Movement	AM		PM																
		Existing	Option 1	Option 2	Option 3	Option 4	Existing	Option 1	Option 2	Option 3	Option 4	Existing	Option 1	Option 2	Option 3	Option 4	Existing	Option 1	Option 2	Option 3
Monroe Avenue Loop & Inner Loop	NB THRU/RT	A					A				B						A			
	SB LIT/THRU	C					A				C						D			
	EB RT	A					A				B						B			
	<b>OVERALL</b>	<b>B</b>					<b>A</b>				<b>B</b>						<b>A</b>			
	NB LIT	A	B				A	B			A	B					A	B		
	NB THRU/RT	A	B				A	B			C	B					A	A		
	SB LIT	A	B				A	B			C	B					D	D		
	SB THRU	B					A				B						A			
	SB RT	A					A				C						A			
	<b>OVERALL</b>	<b>B</b>					<b>A</b>				<b>C</b>						<b>C</b>			
Monroe Avenue & Moreau Street	NB LIT	A	B				A	B			C	B					A	B		
	NB THRU/RT	A	B				A	B			C	B					A	B		
	WB LIT	-	B				-	B			D	B					-	D		
	WB THRU	C	D				-	B			D	B					-	D		
	WB RT	-	A				-	A			C	B					-	B		
	<b>OVERALL</b>	<b>A</b>	<b>B</b>				<b>A</b>	<b>B</b>			<b>B</b>	<b>B</b>					<b>A</b>	<b>B</b>		
	NB LIT	C					C										<b>D</b>			
	NB THRU	C					C										D			
	SEB LT	B					A										A			
	SEB THRU	B					A										B			
Monroe Avenue & Union Street	NWB THRU	B					A										A			
	NWB RT	A					A										A			
	<b>OVERALL</b>	<b>B</b>					<b>A</b>										<b>B</b>			
	NB LIT	D	A				D	A			D	A					D	A		
	NB THRU	C	A				C	A			C	A					C	A		
	SB THRU	B					C				B						B			
	EB LT	A					A				A						A			
	EB RT	A					A				C						A			
	<b>OVERALL</b>	<b>C</b>	<b>A</b>				<b>B</b>	<b>A</b>			<b>C</b>	<b>A</b>					<b>B</b>	<b>A</b>		
	SB LT	-					-										C			
Monroe Avenue & Broad Court Street	SB THRU	B					C				A						C			
	EB THRU	A					A				A						B			
	EB RT	A					A				A						A			
	<b>OVERALL</b>	<b>A</b>					<b>B</b>				<b>A</b>						<b>B</b>			
	NB THRU/RT	C	A				C	A			C	A					C	A		
	SB LT	B					B				B						B			
	SB THRU	A					A				A						A			
	EB THRU	A					A				C						A			
	WB LT/THRU	A					A				A						A			
	<b>OVERALL</b>	<b>A</b>	<b>B</b>				<b>B</b>				<b>A</b>						<b>B</b>			
Pitkin Street & East Avenue	Pitkin Street Court						C				C						C			
	& Broad Court Street						B				B						B			
	Pitkin Street						A				A						A			
	& Union Street						A				C						A			
	Pitkin Street						A				A						A			
	& Union Street						A				C						A			
	Pitkin Street						A				A						A			
	& Broad Court Street						A				C						A			
	Pitkin Street						A				A						A			
	<b>OVERALL</b>	<b>A</b>	<b>B</b>				<b>B</b>				<b>A</b>						<b>B</b>			
Pitkin Street & Main Street	Pitkin Street						C				C						C			
	& Main Street						B				B						B			
	Pitkin Street						A				A						A			
	& Broad Court Street						A				C						A			
	Pitkin Street						A				A						A			
	& Main Street						A				C						A			
	Pitkin Street						A				A						A			
	& Main Street						A				C						A			
	Pitkin Street						A				A						A			
	<b>OVERALL</b>	<b>A</b>	<b>B</b>				<b>B</b>				<b>A</b>						<b>B</b>			
Pitkin Street & Main Street	Pitkin Street						C				C						C			
	& Main Street						B				B						B			
	Pitkin Street						A				A						A			
	& Main Street						A				C						A			
	Pitkin Street						A				A						A			
	& Main Street						A				C						A			
	Pitkin Street						A				A						A			
	& Main Street						A				C						A			
	Pitkin Street						A				A						A			
	<b>OVERALL</b>	<b>A</b>	<b>B</b>				<b>B</b>				<b>A</b>						<b>B</b>			
Pitkin Street & Main Street	Pitkin Street						C				C						C			
	& Main Street						B				B						B			
	Pitkin Street						A				A						A			
	& Main Street						A				C						A			
	Pitkin Street						A				A						A			
	& Main Street						A				C						A			
	Pitkin Street						A				A						A			
	& Main Street						A				C						A			
	Pitkin Street						A				A						A			
	<b>OVERALL</b>	<b>A</b>	<b>B</b>				<b>B</b>				<b>A</b>						<b>B</b>			
Pitkin Street & Main Street	Pitkin Street						C				C						C			
	& Main Street						B				B						B			
	Pitkin Street						A				A						A			
	& Main Street						A				C						A			
	Pitkin Street						A				A						A			
	& Main Street						A				C						A			
	Pitkin Street						A				A						A			
	& Main Street						A				C						A			
	Pitkin Street						A				A						A			
	<b>OVERALL</b>	<b>A</b>	<b>B</b>				<b>B</b>				<b>A</b>						<b>B</b>			
Pitkin Street & Main Street	Pitkin Street						C				C						C			
	& Main Street						B				B						B			
	Pitkin Street						A				A						A			
	& Main Street						A				C						A			
	Pitkin Street						A				A						A			
	& Main Street						A				C						A			
	Pitkin Street						A				A						A			
	& Main Street						A				C						A			
	Pitkin Street						A				A						A			
	<b>OVERALL</b>	<b>A</b>	<b>B</b>				<b>B</b>				<b>A</b>						<b>B</b>			
Pitkin Street & Main Street	Pitkin Street						C				C						C			
	& Main Street						B				B						B			
	Pitkin Street						A				A						A			
	& Main Street						A				C						A			
	Pitkin Street						A				A						A			
	& Main Street						A				C						A			
	Pitkin Street						A				A						A			
	& Main																			

Intersection	Approach & Movement	AM				PM				AM				PM				PN
		Existing	Option 1	Option 2	Option 3	Existing	Option 1	Option 2	Option 3	Existing	Option 1	Option 2	Option 3	Existing	Option 1	Option 2	Option 3	
NB LT	B	C	C	B	B	C	C	B	B	C	C	B	B	C	C	C	B	B
NB THRU/RT	B	C	B	A	A	C	B	B	B	B	B	B	B	C	B	B	D	
SB LT																		
SB THRU/RT	A	A	A	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A
EB LT																		
EB RT																		
WB LT/THRU/RT	A	B	B	B	B	C	A	A	C	A	A	A	A	B	B	B	C	
OVERALL	A	B	B	B	B	B	B	B	B	A	B	B	B	B	B	B	B	
NB LT	D	D	C	D	D	C	C	C	B	C	C	C	D	D	D	D	C	
NB THRU/RT	C	D	C	B	B	B	B	B	B	B	B	B	C	D	D	D	C	
SB LT/RT	B	C	B	A	A	A	A	A	A	A	A	A	A	B	C	B	A	
EB LT	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
EB THRU	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
WB THRU	C	D	C	C	C	D	D	D	C	C	C	C	D	D	D	D	D	
WB RT																		
OVERALL	B	C	B	B	B	B	B	B	B	B	B	B	B	B	B	B	C	
NB LT	C	D	D	D	D	C	D	D	D	C	D	D	D	D	D	D	D	
NB THRU	C	D	D	D	D	C	D	D	D	C	D	D	D	D	D	D	D	
SB LT	D	D	C	C	C	D	D	D	C	D	D	D	D	D	D	D	D	
SB THRU/RT	D	D	C	C	C	C	C	C	C	C	C	C	C	C	C	C	D	
EB LT	C	C	B	C	C	B	B	B	C	C	C	C	C	B	B	B	C	
EB THRU	C	C	B	C	C	B	B	B	C	C	C	C	C	B	B	B	C	
EB RT	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
WB LT																		
WB THRU	A	A	A	A	A	A	A	A	A	A	A	A	A	B	B	B	C	
WB RT	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
OVERALL	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	
NB LT/THRU/RT	D	D	D	D	D	C	D	D	D	D	D	D	D	D	D	D	D	
SB LT																		
SB THRU/RT	D	D	D	D	D	C	D	D	D	D	D	D	D	D	D	D	D	
EB LT	B	C	C	B	C	B	B	B	B	B	B	B	B	B	B	B	B	
EB THRU	C	C	C	B	C	C	C	C	C	C	C	C	C	C	C	C	C	
EB RT																		
WB LT	A	A	A	A	A	A	A	A	A	A	A	A	A	B	B	B	B	
WB THRU	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	
WB RT	B	B	B	C	C	C	C	C	C	C	C	C	C	B	B	B	C	
OVERALL	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	C	

Intersection	Approach & Movement	2008				2035					
		Existing	Option 1	Option 2	Option 3	Option 4	Existing	Option 1	Option 2	Option 3	Option 4
Monroe Avenue & Inner Loop EB Ramps	OVERALL	B	INTERSECTION REMOVED				A	INTERSECTION REMOVED			
Monroe Avenue & Inner Loop WB Ramps	OVERALL	A	B	SAME AS OPTION 1	A	B	SAME AS OPTION 1	B	B	SAME AS OPTION 1	INTERSECTION REMOVED
Monroe Avenue & Union Street	OVERALL	B	SAME AS EXISTING				A	SAME AS EXISTING			
Union Street & Broad/Court Street	OVERALL	C	A	SAME AS OPTION 1	B	A	SAME AS OPTION 1	C	A	SAME AS OPTION 1	INTERSECTION REMOVED
Pitkin Street & Broad/Court Street	OVERALL	A	INTERSECTION REMOVED				B	INTERSECTION REMOVED			
Union Street & East Avenue	OVERALL	A	B	SAME AS OPTION 1	A	B	SAME AS OPTION 1	A	B	SAME AS OPTION 1	INTERSECTION REMOVED
Pitkin Street & East Avenue	OVERALL	B	INTERSECTION REMOVED				B	INTERSECTION REMOVED			
University Avenue & Union Street	OVERALL	A	B	B	B	A	B	A	B	B	INTERSECTION REMOVED
Main Street & Union Street	OVERALL	B	C	B	B	C	C	B	B	C	INTERSECTION REMOVED
Main Street & Inner Loop Ramps	OVERALL	C	C	C	C	C	C	C	C	C	INTERSECTION REMOVED
Main Street & University Avenue/Pitkin Street	OVERALL	B	B	C	C	B	B	C	C	B	INTERSECTION REMOVED

Queue Analysis

Intersection	Approach & Movement	Proposed Storage Length (ft)			Existing Queue Length, Syncro (ft)			Observed Queue Length (ft)			Proposed Queue Length (ft)			Proposed Queue Length (ft)				
		Option 1	Option 2	Option 3	Option 4	AM	PM	AM	PM	Option 1	Option 2	Option 3	Option 4	Existing	Option 1	Option 2	Option 3	Option 4
Monroe Avenue & Inner Loop Ramps	NB THRU	-				90	125	75	200					190				
	NB THRU/RT	75				30	125	25	75					60				
	SB LT/THRU	100				45	0	-	-					190				
	EB LT	-				120	70	100	100					50				
	EB THRU	-				65	50	50	50					50				
	EB RT	200				65	50	50	50					100	150			
	NB LT	100	150			60	35	-	50	110				120	150			
	NB THRU	100	-			65	35	-	-	80				140	140			
	SB LT	150								80				140	140			
	SB THRU/RT	120								60				85	85			
Monroe Avenue & Monroe Loop WB RAMPS	SB THRU/RT	-				65	70	50	175	120				130	230			
	EB LT	200								65				150	150			
	EB THRU	-								170				250	250			
	EB RT	-								40				50	50			
	WB LT	-	200							100	175	70	100	120	120			
	WB THRU	-	-							75	100	70	100	100	100			
	WB RT	-	200							20				85	85			
	NEB LT	100								50	125	50	125	110	110			
	NEB THRU	-								80	125	80	125	120	120			
	SEB LT	75								95	50	50	50	25	25			
Pilkinton Street & Union Street	SEB THRU	-				25	25	7	?					480	480			
	NWB THRU	-				300	195	125	300					220	220			
	NWB RT	50				125	95	50	125					40	40			
	NB LT	-	200			180	40	100	100					150	150			
	NB THRU	-	-			25	0	25	-					100	100			
	SB THRU	-				150	60	100	75					70	70			
	EB LT	100	-			70	60	75	50	60				140	140			
	EB RT	100	100			0	25	0	-	50				20	20			
	SB LT	-								40				40	40			
	SB THRU	-												90	90			
Union Street & Broad/Court Street	SB THRU	-				25	80	50	50					50	50			
	EB THRU	-				30	25	0	?					50	50			
	WB LT/THRU	100				30	0	25	-					40	40			
	NB LT	-	150			85	65	75	50	25				100	100			
	NB THRU	-	-			85	65	75	50	180				100	100			
	EB RT	100				0	25	50	50	180				100	100			
	SB LT	-								90				110	110			
	SB THRU	-								100				320	320			
	EB THRU	-				0	0	50	-	130				160	160			
	WB THRU	-				40	110	50	100	130				230	230			
Pilkinton Street & East Avenue	SB LT	-				0	25	50	50					70	70			
	SB THRU	-												160	160			
	EB THRU	-				0	0	50	-	130				10	10			
	WB THRU	-				160	190	250	275					160	160			
	EB RT	25				45	100	50	100					210	210			
	SB LT	-				25	30	?	?					90	90			
	SB THRU	-												160	160			
	EB THRU	-												20	20			
	WB THRU	-												30	30			
	EB RT	75												160	160			
Pilkinton Street & Avenue	SB THRU	-												90	90			
	EB THRU	-												320	320			
	WB THRU	-												230	230			
	EB RT	75												210	210			
	SB LT	-												90	90			
	SB THRU	-												160	160			
	EB THRU	-												20	20			
	WB THRU	-												30	30			
	EB RT	25												160	160			
	SB LT	-												25	25			

**Queue Analysis**

Intersection	Approach & Movement	Existing Storage Length (ft)	Proposed Storage Length (ft)				2008				2035			
			Existing Queue Length, Syncro (ft)		Observed Queue Length (ft)		Proposed Queue Length (ft)		Existing		Option 1		Option 2	
			AM	PM	AM	PM	Option 1	Option 2	Option 3	Option 4	80	200	200	200
NB L/T	220	220	220	300	200	220	75	200	175	125	170	360	80	90
NB THRU/R/T	220	220	-	-	-	-	75	125	175	175	100	90	150	110
SB L/T	-	-	-	200	200	-	-	-	-	-	-	-	130	230
SB THRU/R/T	-	-	-	200	200	-	-	-	-	-	-	-	100	280
EB THRU	200	200	200	250	250	35	75	75	75	70	0	50	90	40
EB RT	-	-	-	250	250	-	-	-	-	-	-	-	-	0
WB L/T/R/H/R/T	-	-	-	-	-	25	60	***	75	110	200	120	70	250
NB L/T	250	250	250	250	250	25	25	50	50	15	200	120	70	260
NB THRU	250	250	250	250	250	80	100	125	150	100	100	160	140	140
NB RT	250	250	250	250	250	80	100	125	150	100	100	80	140	140
SB L/T/R/T	-	-	200	200	65	60	50	50	50	70	70	70	70	80
EB L/T	75	75	50	75	25	25	25	25	25	10	10	10	10	70
EB THRU	125	125	125	125	25	25	25	25	25	10	60	10	20	10
WB THRU	-	-	-	-	260	425	-250	425	430	460	430	590	610	550
WB RT	-	-	-	-	50	-	-	-	-	70	70	70	70	80
NB L/T	200	200	200	200	210	185	210	210	210	190	210	210	210	210
NB THRU	200	200	200	200	190	175	190	190	190	180	220	190	210	210
NB RT	-	-	-	-	-	-	-	-	-	80	-	80	-	140
SB L/T	175	175	250	250	270	250	225	225	225	200	240	210	210	210
SB THRU/R/T	-	-	-	-	-	235	225	200	200	200	200	210	270	280
EB L/T	75	75	125	125	25	25	-	-	-	15	20	20	15	25
EB THRU	200	200	200	200	75	95	100	100	100	90	100	70	110	120
EB RT	-	-	-	-	30	30	-	-	-	30	90	50	50	80
WB L/T	-	-	90	100	50	50	75	75	75	0	25	25	25	25
WB THRU	150	150	150	150	140	0	-	-	-	0	0	0	70	80
WB RT	-	-	-	-	220	220	140	140	140	80	80	80	130	130
NB L/T/R/H/R/T	-	-	-	-	-	-	-	-	-	110	120	120	130	140
SB L/T	150	150	150	150	90	90	50	75	75	90	100	90	110	140
SB THRU/R/T	-	-	-	-	-	-	25	35	25	40	20	80	50	110
EB L/T	50	50	100	100	-	25	25	25	25	15	25	30	15	25
EB THRU	-	-	-	-	-	110	200	75	150	200	110	80	120	90
EB RT	-	-	-	-	100	130	-	-	-	-	90	110	-	160
WB L/T	100	100	200	200	25	25	50	50	75	20	40	60	30	60
WB THRU	200	200	200	200	200	25	25	50	75	30	40	60	35	60
WB RT	200	200	200	200	0	0	0	0	0	0	20	0	0	30

NOTE:

\*\*\* = Utility Truck had the right most lane closed while new overhead signs were installed.

This created a large backup through the Alexander Street Intersection



= Thru Lane Queue is greater than 200'.

= Turn Lane / Thru Lane exceeds storage length and is blocking other traffic

## **Memo**

---



**Stantec**

### **Inner Loop – Accident History**

---

Date: December 17, 2008  
Date: Revised April 24, 2009  
To: Bill Holthoff, Stantec  
From: Paula Benway, Stantec

---

#### **Inner Loop Accident Data**

The most recent available accident information was obtained for the section of the inner loop from the Rt. 490 interchange in the east to north of the East Main Street interchange. Information available represents a 39-month period between January 1, 2005 and March 7, 2008. The accident history identified a total of 49 accidents occurred along the Inner Loop in this area. The reportable accidents accounted for 30 (61%) of the total accidents and the non-reportable accidents accounted for 19 (39%) of the total accidents. The following list summarizes the types and number of reportable accidents. The rest of the assessment (analysis, rates and potential corrective action) will be related to the reportable type accidents that occurred in the corridor.

- Fixed Object – 17 (57%)
- Sideswipe – 5 (17%)
- Rear End – 4 (13%)
- Right Angle – 1 (3%)
- Head-on – 1 (3%)
- Unknown – 2 (7%)

The accident severity included 13 injuries (43%) and 17 (57%) property damage only. Fifty three percent of all accidents occurred during evening hours with 55% occurring on dry pavement conditions. Seventy percent of the vehicles involved were traveling in a westerly direction. As indicated above, 57% of the accidents involved collision with fixed objects (guide rail, curbing, abutment, debris). Only four of the 30 accidents occurred at a merge/diverge ramp location, with the majority of accidents occurring main line along the horizontal curve between East Main Street and East Avenue. The accident rate for the corridor was calculated and compared to statewide accident rates for Principal Arterial expressways. The current accident rate is 2.48 accidents per million vehicle miles (acc/mvm) which is below the statewide average of 2.72 acc/mvm.

Collision diagrams, detailed accident history, and rate calculations are attached.

#### **Extended Study Area**

An extended study area was also reviewed that included at grade adjacent corridors including: East Main Street, Monroe Avenue/Chestnut, Pitkin Street, Union Street, and a portion of Interstate 490. The following table summarizes the number of reportable accidents and the calculated accident rates for the corridor and intersections for each of these adjacent roadways.

## ACCIDENT RATES

Intersection	Number of Accidents	State/County Rate	Actual Rate	
<b>Intersection Rate (excludes midblock accidents)</b>				
East Main Street @ University/Pitkin	7	0.26 / 0.46	0.33	ACC/MEV
East Main Street @ Inner Loop/University	40	0.26 / 0.46	<b>0.96</b>	ACC/MEV
East Main Street @ Union Street	23	0.26 / 0.46	<b>0.83</b>	ACC/MEV
Pitkin Street @ East Ave	8	0.34 / 0.22	<b>0.44</b>	ACC/MEV
Pitkin Street @ Broad Street	4	0.34 / 0.22	<b>0.66</b>	ACC/MEV
Union Street @ University Ave	14	0.34 / 0.22	<b>0.65</b>	ACC/MEV
Union Street @ East Ave	17	0.34 / 0.22	<b>1.13</b>	ACC/MEV
Union Street @ Broad St	3	0.19 / 0.22	<b>0.71</b>	ACC/MEV
Monroe Avenue @ Inner Loop/ Pitkin St.	7	0.34 / 0.22	<b>0.26</b>	ACC/MEV
Monroe Avenue @ Howell St.	5	0.34 / 0.22	<b>0.34</b>	ACC/MEV
Monroe Avenue @ South Union St.	20	0.34 / 0.22	<b>1.12</b>	ACC/MEV
<b>Link Rate</b>				
<b>Inner Loop - 940T</b>				
Rt. 490-E. Main St.	30	2.72	2.48	ACC/MVM
<b>I-490</b>				
W.of River -E. of Clinton	47	2.72	1.08	ACC/MVM

Locations experiencing above state or county wide accident rates are highlighted in red. Both sections of the expressway system (Inner Loop and I-490) are experiencing accident occurrences below the average rates. Each of the adjacent corridors is further assessed below.

### Corridor Breakdown

**East Main Street corridor**– 80 accidents occurred over a 41-month period from University Avenue in the west to Union Street in the east. There were 27(35%) rear-end accidents, 18(23%) sideswipe, 15(20%) right angle, 6(8%) overtaking, 7(8%) left turn, 2(2%) fixed object, 1 backing, 1 bicycle and 2(2%) unknown accidents that occurred at the three intersections along East Main Street. The severity of these accidents included 15(19%) injuries and 65(81%) property damage only. Seventy four percent of all accidents occurred during daylight hours with 70% occurring on dry pavement conditions. The East Main Street intersections with the Inner Loop/University Avenue and the Union Street intersection are experiencing accident rates above the state/county wide average rates. The Monroe County Department of Transportation investigated East Main Street east of Union Street in July 2006 as part of a PIL. The investigation resulted in traffic signal

timing changes that improved the progression on East Main Street.

*Inner Loop/University Intersection* – of the 40 accidents that occurred at this intersection, 13(33%) were vehicles sideswiping/overtaking in the left turn lanes on the Inner Loop ramp approach and the University Avenue approach. These accidents are attributable to driver confusion, inattention to turning maneuvers, unsafe lane change or possible narrow lane widths. The other major accident type occurring at this intersection is rear-end accidents 13 (33%) of the total; driver inattention is noted as a contributing factor.

*North Union Street Intersection* – of the 23 accidents that occurred at this intersection, 8(35%) were vehicles sideswiping/overtaking on the North Union Street northbound approach and the East Main Street westbound approach. These accidents are attributable to driver confusion, inattention to turning maneuvers, unsafe lane changes or possible narrow lane widths. The other major accident type occurring at this intersection is rear-end accidents 8 (35%) of the total; driver inattention is noted as a contributing factor.

**Monroe Avenue/Chestnut corridor** – 50 accidents occurred over a 41-month period along the section from Chestnut north of Inner Loop to South Union Street intersection to the south. There were 20 (40%) rear-end accidents, 11(22%) right angle, 6(12%) sideswipe, 4(8%) right turn, 3(6%) fixed object, 2(4%) left turn, 1(2%) head on, 1(2%) bicycle, 1(2%) driveway and 1 unknown accident. The severity of these accidents included 66% property damage only, 32% resulted in injuries and one fatality (motorcycle) did occur. Sixty two percent of the accidents occurred during daylight hours, and with 68% occurring on dry pavement conditions. The South Union intersection with Monroe Avenue is experiencing an accident rate above the state/county wide average.

*South Union Intersection* – of the 20 accidents that occurred at this intersection, 8(40%) were right angle accidents with the South Union approach. These accidents are attributable to driver inattention and visibility constraints. The other major accident type occurring at this intersection is rear-end accidents 7 (35%) of the total; driver inattention is noted as a contributing factor.

**Pitkin Street corridor** – 12 accidents occurred over a 29-month period. There were 5(42%) rear-end accidents, 3(25%) right angle, 1(8%) right turn, 1(8%) overtaking, 1(8%), pedestrian, 1(8%) unknown accident. Ninety two percent of the accidents involved property damage only, with 58% occurring during daylight hours, and with 58% occurring on dry pavement conditions. The East Avenue and Broad Street intersections with Pitkin Street are experiencing accident rates above the state/county wide average rates. Review of the accidents occurring at either intersection does not show a predominant accident pattern.

**Union Street corridor** – 61 accidents occurred over a 39-month period. There were 21(34%) right angle, 12(20%) rear-end, 10(16%) left turn, 4(6%) backing up, 3(5%) sideswipe, 3(5%) fixed object, 3(5%) right turn, 3(5%) unknown, 1 driveway and 1 overtaking accident. Eighty four percent of the accidents involved property damage only, and evenly distributed during daylight/evening hours, and with 74% occurred on dry pavement conditions. Further review of the actual reports suggests that the rear end accidents were primarily a result of following too closely. The University Avenue and East Avenue intersections with Union Street are experiencing accident rates above the state/county wide average rates.

*University Avenue Intersection* – of the 14 accidents that occurred at this intersection,

8(57%) were right angle accidents. These accidents are attributable to driver inattention and possible visibility constraints.

*East Avenue Intersection* – of the 17 accidents that occurred at this intersection, 12(71%) were right angle accidents. These accidents are attributable to driver inattention and possible visibility constraints related to bridge railing over the Inner Loop and building on the southeast quadrant.

**I-490 corridor** – 47 accidents occurred over a 33-month period. The 47 accidents consisted of 18(38%) fixed object accidents, 16(34%) rear-end, 8(17%) overtaking, 3(6%) unknown, 1 head-on and 1 sideswipe accident. The accident severity included 16(34%) injuries and 31(66%) property damage only. Sixty six percent of the accidents occurred during daylight hours, and with 60% occurring on dry pavement conditions. The majority of fixed object accidents involved unsafe travel speeds for the conditions (wet, construction, grade, or curvature of road). It should be noted that sections of I-490 included in this assessment was under construction during the time represented by this safety assessment. As such, caution should be used in review or interpretation of the findings.

#### **STANTEC CONSULTING SERVICES INC.**

Attachments: Accident Rate Calculations, Collision Diagrams, Detailed Accident History

## ACCIDENT RATE CALCULATIONS

Project Name:

Inner Loop

Date:

12/10/2008

### Intersection Rate

(excludes midblock accidents)


<b>East Main Street @ University Ave/Pitkin</b>	# Accidents 7 Vehicles/Day	Per Million Entering Vehicles $\frac{1,000,000}{16,950 \times 3.4 \times 365}$	= $\frac{7000000}{21034950} = 0.33$	<b>ACC/MEV</b>
			0.26 0.46	Statewide Rate County Rate
<b>Inner Loop/University</b>	# Accidents 40 Vehicles/Day	Per Million Entering Vehicles $\frac{1,000,000}{33,450 \times 3.4 \times 365}$	= $\frac{40000000}{41511450} = 0.96$	<b>ACC/MEV</b>
			0.26 0.46	Statewide Rate County Rate
<b>Union Street</b>	# Accidents 23 Vehicles/Day	Per Million Entering Vehicles $\frac{1,000,000}{22,350 \times 3.4 \times 365}$	= $\frac{23000000}{27736350} = 0.83$	<b>ACC/MEV</b>
			0.26 0.46	Statewide Rate County Rate
<b>Pitkin Street @ East Ave</b>	# Accidents 8 Vehicles/Day	Per Million Entering Vehicles $\frac{1,000,000}{16,450 \times 3 \times 365}$	= $\frac{8000000}{18012750} = 0.44$	<b>ACC/MEV</b>
			0.34 0.22	Statewide Rate County Rate
<b>Broad Street</b>	# Accidents 4 Vehicles/Day	Per Million Entering Vehicles $\frac{1,000,000}{5,550 \times 3 \times 365}$	= $\frac{4000000}{6077250} = 0.66$	<b>ACC/MEV</b>
			0.34 0.22	Statewide Rate County Rate
<b>Union Street @ University Ave</b>	# Accidents 14 Vehicles/Day	Per Million Entering Vehicles $\frac{1,000,000}{19,600 \times 3 \times 365}$	= $\frac{14000000}{21462000} = 0.65$	<b>ACC/MEV</b>
			0.34 0.22	Statewide Rate County Rate
<b>East Ave</b>	# Accidents 17 Vehicles/Day	Per Million Entering Vehicles $\frac{1,000,000}{13,700 \times 3 \times 365}$	= $\frac{17000000}{15001500} = 1.13$	<b>ACC/MEV</b>
			0.34 0.22	Statewide Rate County Rate
<b>Broad St</b>	# Accidents 3 Vehicles/Day	Per Million Entering Vehicles $\frac{1,000,000}{3,850 \times 3 \times 365}$	= $\frac{3000000}{4215750} = 0.71$	<b>ACC/MEV</b>
			0.19 0.22	Statewide Rate County Rate
<b>Monroe Avenue @ Inner Loop/ Pitkin St.</b>	# Accidents 7 Vehicles/Day	Per Million Entering Vehicles $\frac{1,000,000}{21,310 \times 3.4 \times 365}$	= $\frac{7000000}{26445710} = 0.26$	<b>ACC/MEV</b>
			0.34 0.22	Statewide Rate County Rate
<b>Howell St.</b>	# Accidents 5 Vehicles/Day	Per Million Entering Vehicles $\frac{1,000,000}{11,750 \times 3.4 \times 365}$	= $\frac{5000000}{14581750} = 0.34$	<b>ACC/MEV</b>
			0.34 0.22	Statewide Rate County Rate
<b>South Union St.</b>	# Accidents 20 Vehicles/Day	Per Million Entering Vehicles $\frac{1,000,000}{14,400 \times 3.4 \times 365}$	= $\frac{20000000}{17870400} = 1.12$	<b>ACC/MEV</b>
			0.34 0.46	Statewide Rate County Rate

**Total Link Rate**

(All midblock &amp; intersection accidents)

<b>Inner Loop - 940T</b>	<b># Accidents</b>	<b>Per Million Entering Vehicles</b>					
<b>Rt. 490-E. Main St.</b>	<b>30</b>	x	1,000,000		=	<b>30000000</b>	=
	1	x	10,200	x	3.25	x	365
	Length (miles)	Vehicles/Day	# of Years		Days/Year		
						<b>12099750</b>	
							<b>2.48 ACC/MVM</b>
						2.72	Statewide Rate
						0.00	County Rate
<b>I-490</b>	<b># Accidents</b>	<b>Per Million Entering Vehicles</b>					
<b>W.of River -E. of Clinton</b>	<b>47</b>	x	1,000,000		=	<b>47000000</b>	=
	0.5	x	86,970	x	2.75	x	365
	Length (miles)	Vehicles/Day	# of Years		Days/Year		
						<b>43648069</b>	
							<b>1.08 ACC/MVM</b>
						2.72	Statewide Rate
						0.00	County Rate



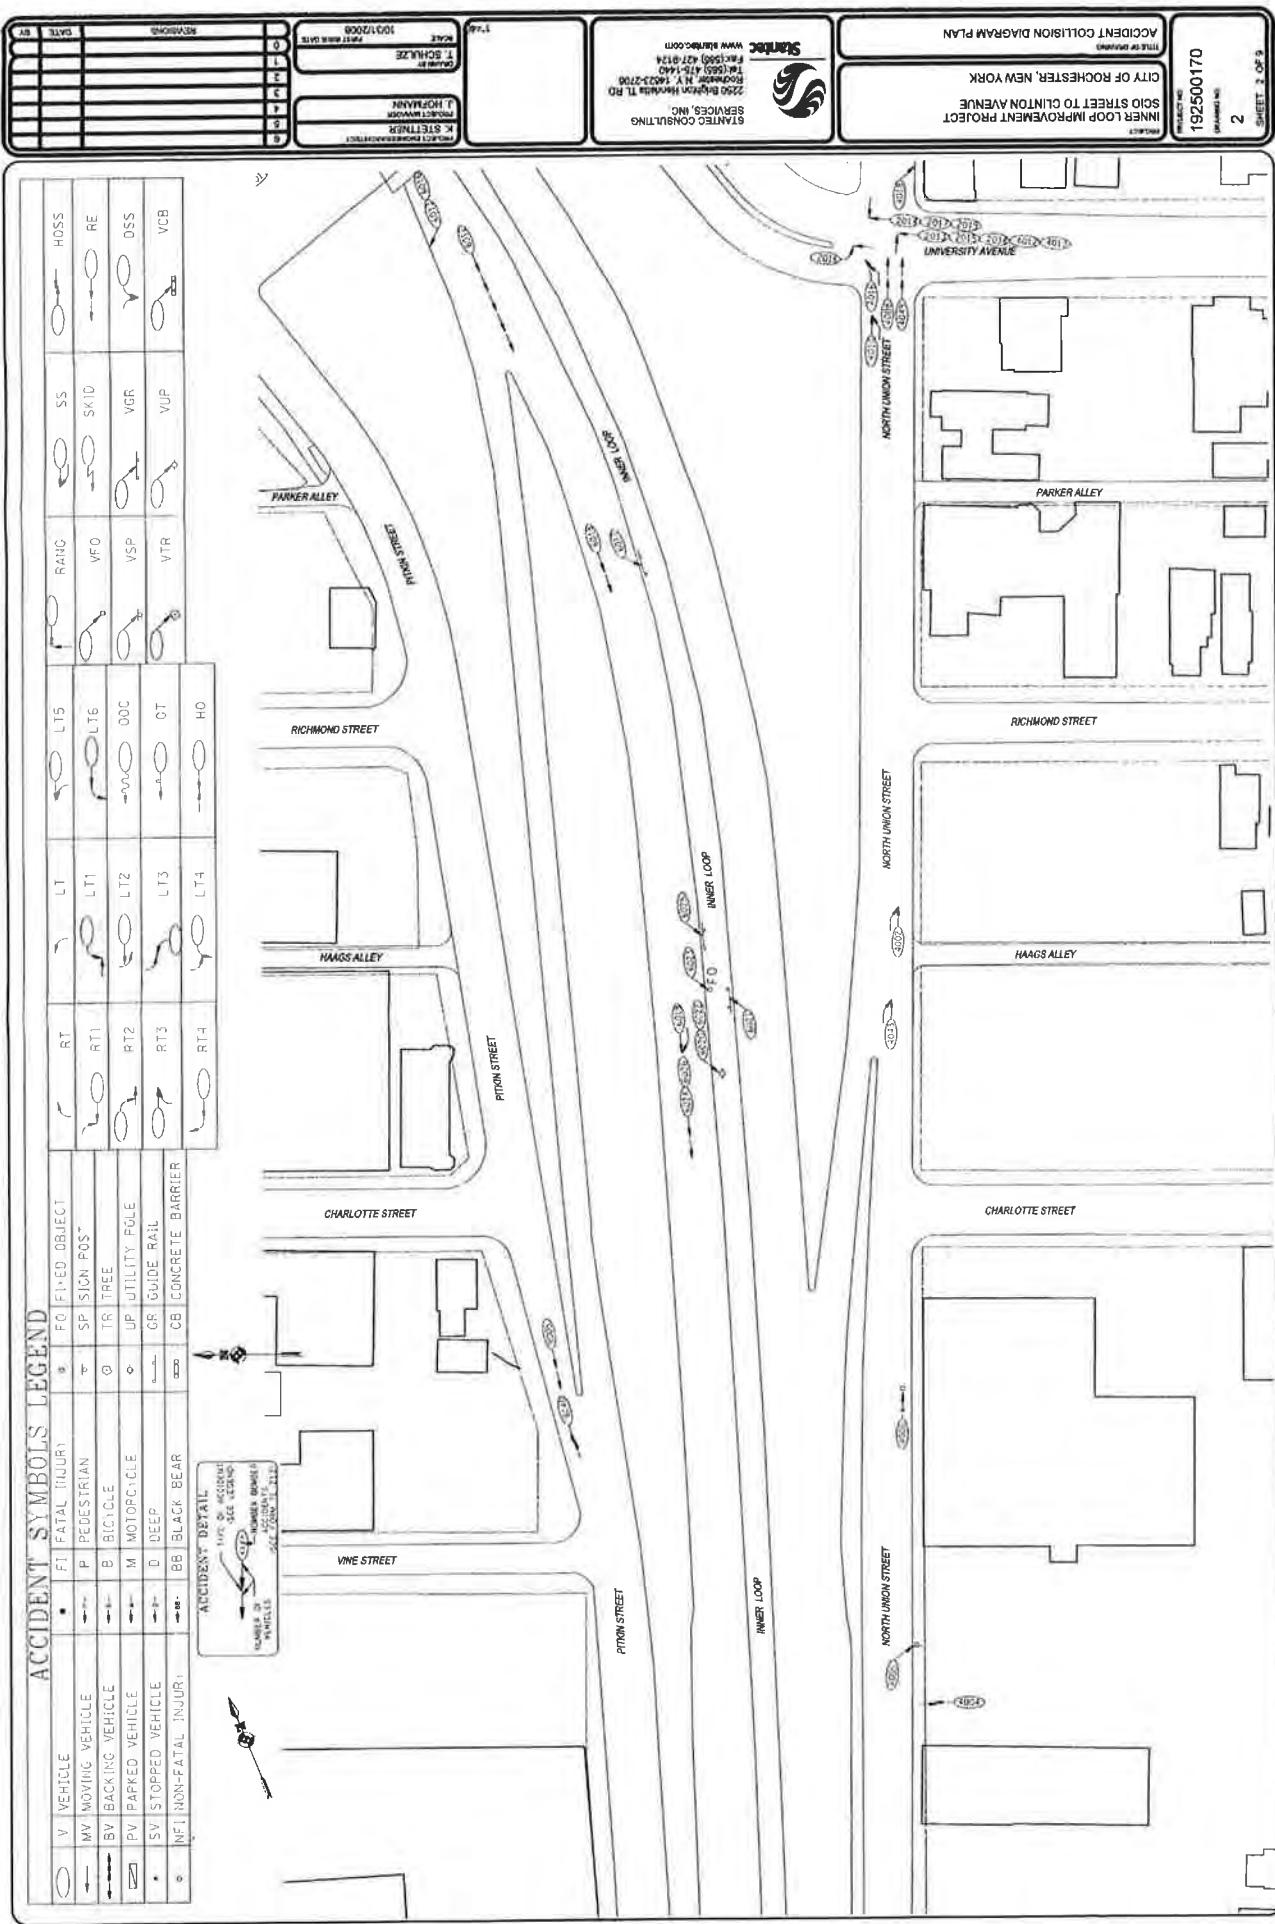


### ACCIDENT SYMBOLS LEGEND

V	VEHICLE	F1	FATAL INJURY	F0	FOREGED OBJECT	R	RT	L	LT	LTS	RANG	SS	HOSS
—	MV MOVING VEHICLE	→	P PEDESTRIAN	—	SP SIGN POST	—	—	—	—	—	—	—	SRID
→	BV BACKING VEHICLE	→	B BICYCLE	○	TR TREE	—	—	—	—	—	—	—	RE
→	PV PARKED VEHICLE	→	M MOTORCYCLE	△	UF UTILITY POLE	—	—	—	—	—	—	—	DSS
■	SV STOPPED VEHICLE	→	D DEER	—	GR GUIDE RAIL	—	—	—	—	—	—	—	VGP
—	SV STOPPED VEHICLE	→	BB BLACK BEAR	—	CB CONCRETE BARRIER	—	—	—	—	—	—	—	VUP
—	—	—	NF NON-FATAL INJURY	—	—	—	—	—	—	—	—	—	VCR

### ACCIDENT DETAIL



NUMBER OF VEHICLES  
INVOLVED IN ACCIDENT  
IN THIS LOCATION  
IN THE LAST 24 HRS.

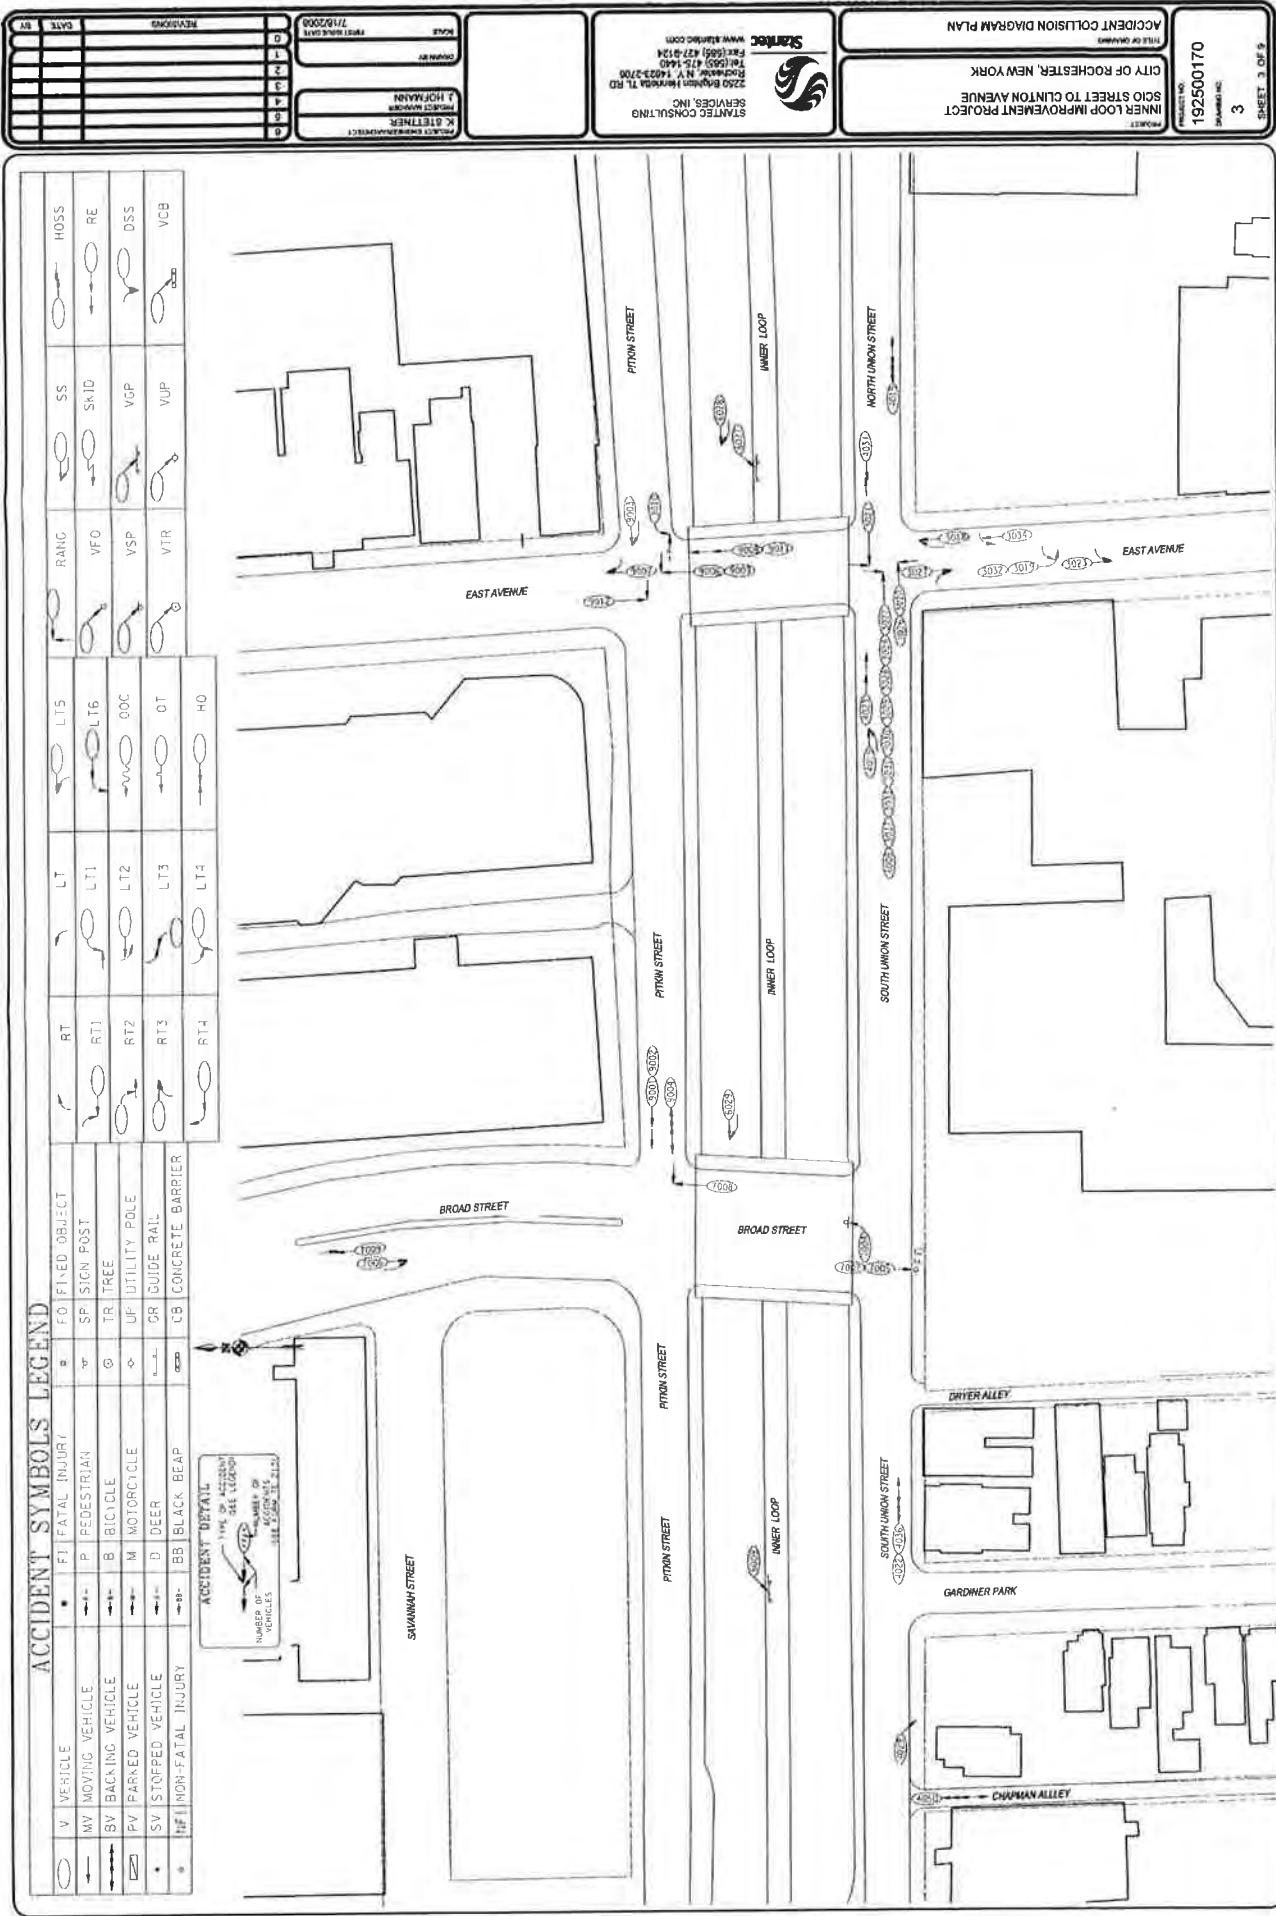



ALL	REVISIONS	DATE
V	REVISIONS	DATE
MV	REVISIONS	DATE
BV	REVISIONS	DATE
PV	REVISIONS	DATE
SV	REVISIONS	DATE
IF	REVISIONS	DATE


### ACCIDENT SYMBOLS LEGEND

V	VEHICLE	*	F1 FATAL INJURY	■	FO FIXED OBJECT
MV	MOVING VEHICLE	→	P PEDESTRIAN	▼	SP SIGN POST
BV	BACING VEHICLE	↔	B BIKE	○	TR TRUCK
PV	PARKED VEHICLE	↔	M MOTORCYCLE	◊	UP UP TURN, POLE
SV	STOPPED VEHICLE	↔	D DEEP	↔	GR GUIDE RAIL
IF	NON-FATAL INJURY	↔	BB BLACK BEAR	▣	CB CONCRETE BARRIER

### ACCIDENT DETAIL

TYPE OF ACCIDENT  
SEE ACCIDENT  
NUMBER  
IN  
ACCIDENT  
SYMBOL

FDNY FIRE WALL  
BOCA 11-1994  
1000-1000-1000-1000  
1000-1000-1000-1000  
1000-1000-1000-1000

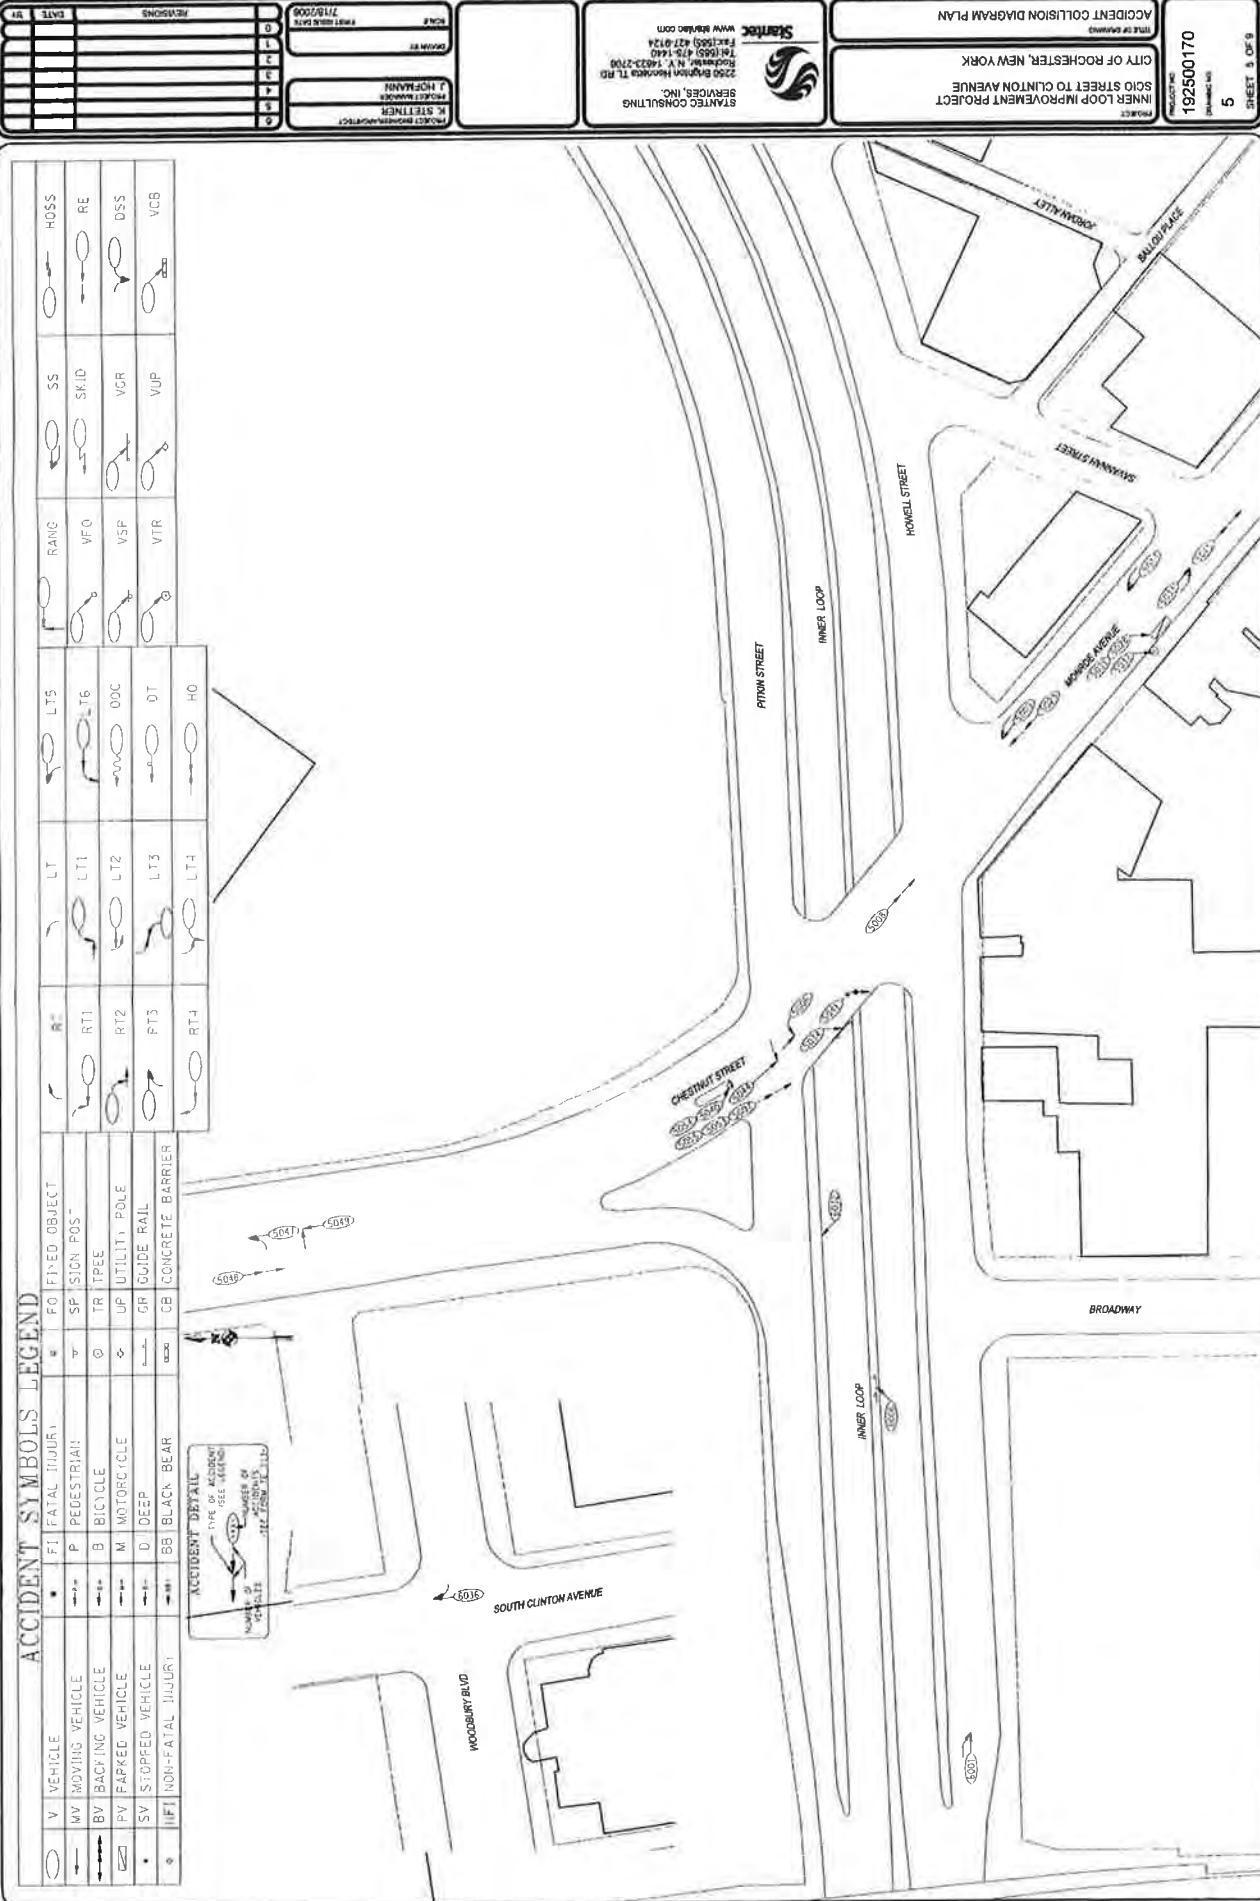



### ACCIDENT SYMBOLS LEGEND

V	VEHICLE	*	FATAL INJURY	*	FO FIXED OBJECT	*	RT	*	LT	*	L15	*	RANG	*	SS	*	HOPS
—	MV MOVING VEHICLE	•	P PEDESTRIAN	—	SP SIGN POST	—	RT1	—	LT1	—	LT6	—	RTD	—	SSD	—	RE
—	BV BACKING VEHICLE	—	B BIKE	—	TR TREE	—	RT2	—	LT2	—	LT6	—	RTD	—	SSD	—	DSS
—	PV PARKED VEHICLE	—	M MOTORCYCLE	—	UP UTILITY POLE	—	RT3	—	LT3	—	LT6	—	RTD	—	SSD	—	VCB
—	Sv STOPPED VEHICLE	—	D DEER	—	GR GUIDE RAIL	—	RT4	—	LT4	—	LT6	—	RTD	—	SSD	—	VCP
—	NFI NON-FATAL INJURY	—	BB BLACK BEAR	—	CB CONCRETE BARRIER	—											VTR

ACCIDENT DETAIL  
 TYPE OF ACCIDENT  
 SEE LEGEND  
 NUMBER OF REPORTS  
 NUMBER OF VEHICLES







## ACCIDENT SYMBOLS LEGEND

•	F1 FATAL INJURY	■	FO FIXED OBJECT
•	P PEDESTRIAN	■	SP SIGN POST
•	B BIG CYCLE	○	TR TREE
•	M MOTOR CYCLE	↔	UP UTILITY POLE
•	SV STOPPED VEHICLE	○	GR GUIDE PAIL
•	D DEER	↔	CB CONCRETE BARRIER
•	BB BLACK BEAR	↔	HO HOSE

ACCIDENT SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

SEE ACCIDENT

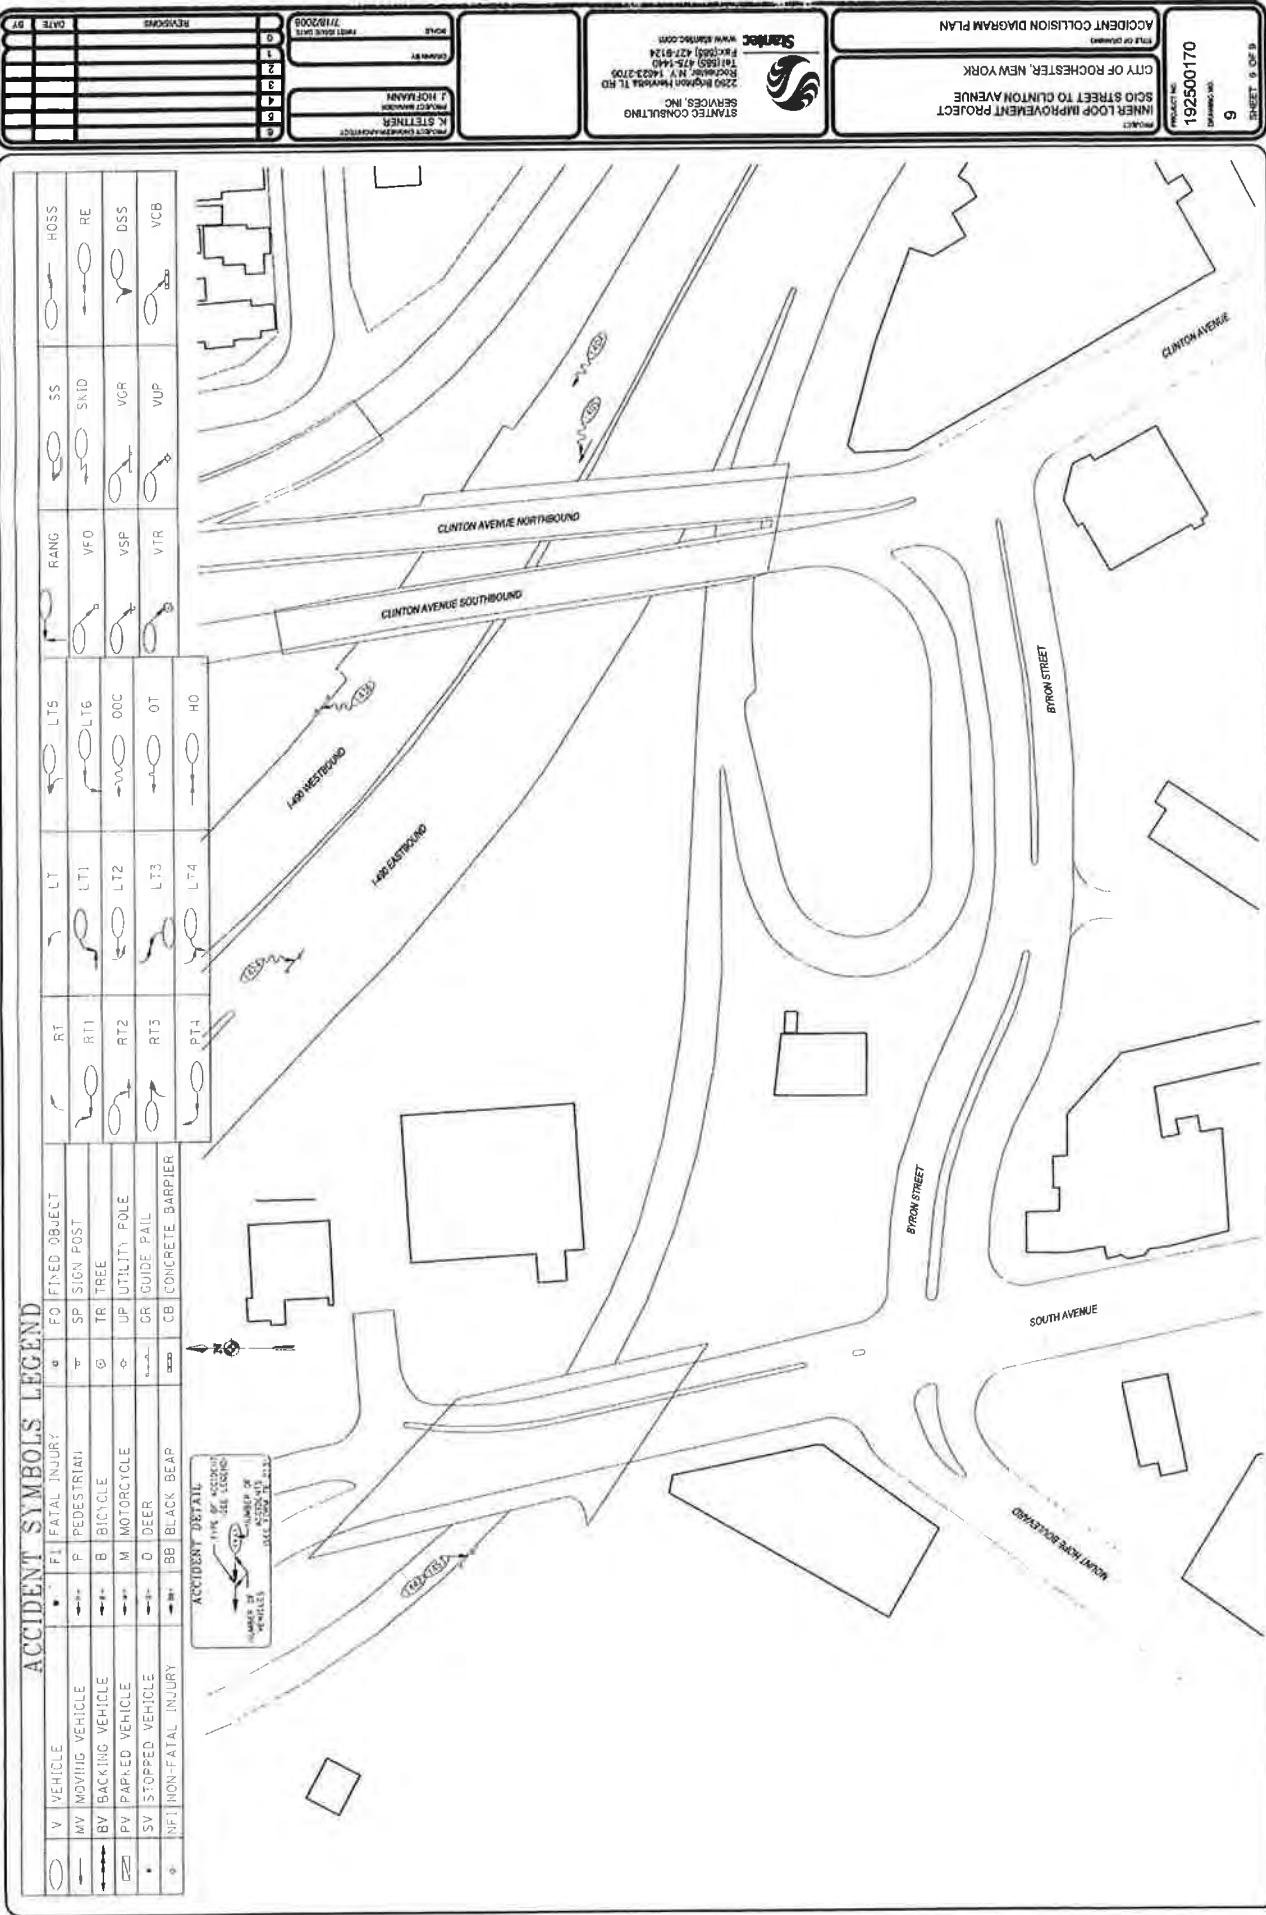


Diagram: Inner Loop		Street Name: Inner Loop (Rt. 940T)	
County of Monroe Town of City of Rochester		Route Number: Location: Inner Loop Milepost: E. Main St To: I-490	
PERIOD STUDIED From 1/1/2005 To: 3/7/2008 39 Months		Date of Report: 1/13/2000	
(1) No.	(2) Date	(3) Time	(4) (5) (6) (7) (8) (9)
6001	6/5/2006	16:15	PDO
6004	12/16/2007	5:43	Inj
6005	2/9/2007	0:29	Inj
6006	3/7/2008	21:30	Inj
6009	7/5/2007	1:00	PDO
6011	6/10/2005	16:05	PDO
6012	2/8/2006	16:16	Inj
6013	11/16/2006	18:29	PDO
6016	6/2/2007	12:05	Inj
6017	9/22/2006	7:49	PDO
6018	4/8/2007	14:23	Inj
6019	4/4/2005	22:40	Inj
6020	10/19/2006	19:00	Inj
6021	1/24/2007	1:40	Inj
(10)	(11) Apparent Contributing Factors	(12) Description	
i c r i e n t n d d d d r	l g h v e o o h f e a t n n d d r	V2 STRUCK V1 AT EXIT LANE FOR MONROE AVE (7) Failure to Yield Right of Way (13) Passing or Lane Usage Improper V1 STRUCK GUIDE RAIL, THEN STRUCK GUIDE RAIL WITH LEFT SIDE (2) Alcohol Involvement (19) V1 SPUN OUT OF CONTROL, HITTING WALL & FLIPPING ONTO IT'S ROOF. (2) Alcohol Involvement (66) Pavement Slippery V1 HIT ICY PATCH ON THE ROAD ,SPUN OUT & HIT GUARD RAIL. (66) Pavement Slippery V1 LEFT IT'S LANE & STRUCK GUARD RAIL (2) Alcohol Involvement (13) Passing or Lane Usage Improper V1 PASS V2, LOST CONTROL STRIKING V2 (13) Passing or Lane Usage Improper Acc. Main St to Acc. E. Ave (9) Following Too Closely Acc. Main St to Acc. E. Ave (66) Pavement Slippery Imp from Main St (4) Driver Inattention REnd FixO Acc. Main St to Acc. E. Ave (9) Following Too Closely REnd FixO Acc. Main St to Acc. E. Ave (19) Unsafe Speed (13) Passing or Lane Usage Improper Acc. Main St to Acc. E. Ave (9) Following Too Closely Side Acc. Main St to Acc. E. Ave (20) Unsafe Lane Changing (19) Unsafe Speed Acc. Main St to Acc. E. Ave (19) Unsafe Speed (66) Pavement Slippery FixO Acc. Main St to Acc. E. Ave (13) Passing or Lane Usage Improper	

Diagram: Inner Loop  
County of Monroe  
Town of City of Rochester

**DETAILS OF  
ACCIDENT HISTORY**

---

Sear-Brown Group

Street Name:	Inner Loop (Rt. 940T)		
Route Number:			
Location:	Inner Loop	To:	I-490
Milepost:	E. Main St	By	
Date of Report:	1/13/200		
P.I.N.			
Case No.			
File			
Page Number	2		

PERIOD STUDIED  
From 1/1/2005  
To: 3/7/2008  
39 Months

Acc. g	Type	Description
FixO	Acc. Main St to Acc. E. Ave (19) Unsafe Speed (66) Pavement Slippery	
FixO	Acc. Main St to Acc. E. Ave (19) Unsafe Speed (66) Pavement Slippery	
REnd	Acc. Main St to Acc. E. Ave (19) Unsafe Speed (66) Pavement Slippery	
FixO	Acc. Main St to Acc. E. Ave (2) Alcohol Involvement (13) Passing or Lane Usage Improper	
REnd	Main St Ramp (19) Unsafe Speed (64) Obstruction/Debris	
FixO	Access E. Ave to Ramp Chapman St. (19) Unsafe Speed (66) Pavement Slippery	
Side	Access E. Ave to Ramp Chapman St. (66) Pavement Slippery	
Side	Access Ramp Chapman St to Access Buena St (13) Passing or Lane Usage Improper	
FixO	Slip Ramp from Pitkin (2) Alcohol Involvement	
FixO	Ramp Chapman St to Access Buena St (19) Unsafe Speed (47) Tire Failure/Inadequate	
Unkn	Ramp to Buena St - V1 hit debris in the road (64) Obstruction/Debris	
FixO	I-490 East Ramp-crashed into attenuator at diverge pt. (2) Alcohol involvement (20) Unsafe Lane Changing	
Unkn	I-490 East Ramp - truck on fire in construction zone (60) Other Vehicular Failure/Inadequate	
FixO	South overpass - going straight, hit curb, unsafe speed (19) Unsafe Speed (47) Tire	

**Diagram: Inner Loop**  
**County of Monroe**  
**Town of City of Rochester**

Street Name:	Inner Loop (Rt. 940T)		
Route Number:			
Location:	Inner Loop	To:	I-490
Milepost:	E. Main St		
Date of Report:	1/13/2000		
P.I.N.			
Case No.			
File			
By			
Page Number	3		

(1) No.	(2) Date	(3) Time	e t	n n d	n n d	e s y	n d	n d	.. Contri buting Factors	(12) Acc. Type	Description
6040	1/5/2008	2:18	2	inj	4	1	1	217.20		H-On	E. Clinton Overpass - wrong way on inner loop (17) Traffic Control Disregarded (20) Unsafe Lane Changing
6041	1/11/2008	6:31	1	inj	2	4	2	319.66		FixO	W of Clinton overpass - pavement slippery (19) Unsafe speed, pavement slippery (66) Pavement Slippery

Location: Inner Loop			Town: City of Rochester		
13-Jan-09			County: Monroe		
<i>Milepost: E. Main St To: I-490</i>					
Time of Day	No. of Accidents	% of Total	Direction	# Veh	% of Total
6 AM - 10 AM	6	20	North:	0	0
10:00 AM - 4 PM	5	17	South:	1	2.3
4 PM - 7 PM	6	20	East:	8	19
7 PM - 12 MID	5	17	West:	30	70
12 MID - 6 AM	8	27	Unknown:	0	0
Unspecified	0	0			
Total	30				Total 43
Weather	No. of Accidents		Acc. Type	# Veh	% of Total
Clear:	15	50	Sideswipe:	5	17
Cloudy:	7	23	Rear End:	4	13
Fog:	0	0	Right Angle:	1	3.3
Rain:	4	13	Left Turn:	0	0
Sleet:	0	0	Pedestrian:	0	0
Snow:	4	13	Fixed Object:	17	57
Unknown:	0	0	Head on:	1	3.3
Total	30				Total 30
Pavement	No. of Accidents		Accident Severity	No. of Accidents	% of Total
Dry:	16	55	Fatal:	0	0
Muddy:	0	0	Non-Fatal Injury:	13	43
Other:	0	0	Property damage only:	17	57
Slush:	0	0	Non-reportable:	0	0
Snow/Ice:	7	24	Total	30	
Wet:	6	21			
Unknown:	0	0	Type of Vehicle	No. of Accidents	% of Total
Total	29		Passenger Cars:	43	98
			Commercial Vehicles:	1	2.3
			Total	44	
Time of Year	No. of Accidents		Light Condition	No. of Accidents	% of Total
Winter (Dec-Feb)	13	43	Dark Road-Lighted:	16	53
Spring (Mar-May)	5	17	Dark Road-Unlighted:	0	0
Summer (Jun-Aug)	7	23	Dawn:	2	6.7
Fall (Sep-Nov)	5	17	Daylight:	12	40
Total	30		Dusk:	0	0
			Unknown:	0	0
			Total	30	

Diagram: East Main							Street Name: East Main St Corridor	P.I.N. _____		
County of Monroe							Route Number: _____	Case No. _____		
Town of City of Rochester							File _____	By _____		
							Milepost: University Ave	To: Union Street		
							Date of Report: 1/13/200	Page Number 1		
PERIOD STUDIED							(12) Description			
(1) No.	(2) Date	(3) Time	(4) S	(5) Y	(6) d	(7) d	(8) Contributing Factors	(9) Apparent Acc. Type	(10)	(11)
1019	10/1/2005	11:50	2 PDO	1	1	1	14.9	REnd	V1 rear-ended v2 while V2 was stopped in traffic. (4) Driver Inattention (9) Following Too Closely	(12)
1021	9/19/2006	12:03	2 PDO	1	1	1	18.20	Side	Vehicles turning left in adjoining lanes when v1 veered into v2. (18) Turning Improperly (20) Unsafe Lane Changing	
1023	5/23/2007	13:40	2 PDO	1	1	1	14	Side	V1 sideswiped the parked v2. (4) Driver Inattention	
1033	1/3/2006	16:20	2 PDO	1	1	1	269.7	RAng	V1 was allowed to enter by v2 stopped Vehicles in Lanes 1 & 2 but entering lane 3 struck V2 (69) View Obstructed/Limited (7) Failure to Yield Right of Way	
1034	9/9/2005	13:38	2 PDO	1	1	1	19	REnd	(9) Following Too Closely	
1035	3/28/2006	9:10	2 [inj]	1	1	1		Left	V2 in intersection when light turned red. V1 started before V2 cleared	
1037	3/2/2007	22:50	2 PDO	4	1	1	18	Left	V2 turned into the path of V1 (18) Turning Improperly	
1038	6/2/2007	12:05	2 Inj	1	1	1	14	RAng	V1 struck v2. (4) Driver Inattention	
1039	4/4/2007	8:06	2 PDO	1	1	2	3,18,13	Side	V2 was sideswiped by v1. (18) Turning Improperly (13) Passing or Lane Usage Improper	
1040	3/6/2007	22:11	2 PDO	4	1	4	2,7	Left	(7) Failure to Yield Right of Way	
1041	3/26/2006	13:35	2 PDO	1	1	1	217	RAng	(17) Traffic Control Disregarded	
1042	6/10/2005	13:33	2 PDO	1	1	2	24,20	Side	V1 clipped mirror on V2 while going around a third uninvolved vehicle. (4) Driver Inattention (20) Unsafe Lane Changing	
1043	7/6/2005	1:16	2 PDO	1	1	2	37,17	RAng	V1 ran red light and struck V2 (7) Failure to Yield Right of Way (17) Traffic Control Disregarded	
1044	9/17/2005	15:29	2 PDO	1	1	1	1,17	RAng	V1 struck V2 who had failed to stop for the red light. (17) Traffic Control Disregarded	

<b>DETAILS OF ACCIDENT HISTORY</b>	
County of Monroe Town of City of Rochester Sear-Brown Group	

PERIOD STUDIED

From 1/1/2005  
To: 5/10/2005  
41 Months

(4) (5) (6) (7) (8) (9)

Diagram: East Main

County of Monroe  
Town of City of Rochester  
Sear-Brown Group

Street Name: East Main St Corridor

Route Number:

Location: East Main St

Milepost: University Ave To: Union Street

Date of Report: 1/13/2000

P.I.N.	_____
Case No.	_____
File	_____
By	_____
Page Number	2

(1) (2) (3)  
No. Date Time

s y d d r

(10)  
Contributing Factors

(11)  
Apparent Acc.  
Type

Over

(4) Driver Inattention

RAng

V2 ran a red light and was struck by V1 (17) Traffic Control Disregarded

RAng

V1 & 2 collided in the intersection and claim both had a green light. (17) Traffic Control Disregarded

REnd

V2 stopped quickly to avoid vehicle running a red light and was rear ended by V2 (26) Reaction to Other Uninvolved Vehicle

Back

V1 backed into V2 (3) Backing Unsafely

REnd

(4) Driver Inattention

RAng

V1 ran the red light and was struck by v2 and V3. (17) Traffic Control Disregarded

REnd

(4) Driver Inattention

RAng

V1 & 2 struck each other. Both drivers claimed that they had a green light. (17) Traffic Control Disregarded (17) Traffic Control Disregarded (7) Failure to Yield Right of Way

Side

V1 straight in a left turnlane and struck v2, in a left turnlane (18) Turning Improperly

Side

V1 sideswiped V2 and left the scene (2) Alcohol Involvement (20) Unsafe Lane Changing

REnd

(4) Driver Inattention

Side

V1 sideswiped V2 and left the scene (2) Alcohol Involvement (20) Unsafe Lane Changing

REnd

(4) Driver Inattention

Side

Both vehicles were turning left and V2 drifted into vi's lane. (13) Passing or Lane Usage Improper

Diagram: East Main		Street Name: East Main St Corridor		P.I.N. _____	
County of Monroe Town of City of Rochester		Route Number: _____		Case No. _____	
Sear-Brown Group		Location: East Main St		File _____	
PERIOD STUDIED		Milepost: University Ave To: Union Street		By _____	
From 1/1/2005 To: 5/10/2000 41 Months		Date of Report: 1/13/2000		Page Number 3	
(1) No.	(2) Date	(3) Time	(4) Contributing Factors	(10) Apparent Contributing Factors	(11) Type
1060	8/29/2007	13:59	S y d d r	C C a o o h	Over
1061	4/22/2008	9:00	2 PDO	i i o o n n e	Side
1062	5/6/2008	16:02	2 PDO	i i 1 1 1 1	Over
1063	5/10/2008	13:34	3 PDO	i i 1 1 1 1	Over
1068	9/8/2006	22:40	2 PDO	i i 1 1 1 1	Over
1071	7/2/2007	10:32	2 PDO	i i 1 1 1 1	REnd
1072	7/2/2007	10:32	2 PDO	i i 1 1 1 1	REnd
1074	11/20/2007	16:30	3 PDO	i i 1 1 1 1	REnd
1075	12/11/2007	13:00	2 PDO	i i 1 1 1 1	REnd
1076	1/11/2008	10:02	2 PDO	i i 1 1 2 2 2 2	Side
1077	1/21/2008	19:05	2 PDO	i i 1 1 2 2 2 2	Over
1078	2/9/2008	13:35	2 PDO	i i 1 1 4 4 2 4,9	REnd
1079	3/7/2008	8:30	3 inj	i i 1 1 2 2 69,7,69	Left
1081	7/12/2005	8:10	2 PDO	i i 1 1 1 1 1 1	Left
(12) Description					
49 V1 U-turn from the right lane and turned in front of V2 (7) Failure to Yield Right of Way (20) Unsafe Lane Changing					
V1 struck V2 with its trailer while they were both turning left (13) Passing or Lane Usage Improper					
V1 tried to make the light and Struck V2&3 (17) Traffic Control Disregarded (4) Driver Inattention					
V1 merge to right lane and struck v2 (13) Passing or Lane Usage Improper					
(9) Following Too Closely					
V3 sudden stop causing V2 to stop. V1 hit v2 which caused V2 to hit V3 (9) Following Too Closely					
(9) Following Too Closely					
V1 drove by V2 and struck V1's mirror. (13) Passing or Lane Usage Improper					
V2 stopped suddenly to let a NYS Trooper by and v1 struck V2 (4) Driver Inattention (9) Following Too Closely					
V1 struck V2 as it made a left turn causing it to spin out and hit a parked car (69) View Obstructed/Limited (7) Failure to Yield Right of Way (69) View Obstructed/Limited					
(7) Failure to Yield Right of Way					

**DETAILS OF ACCIDENT HISTORY**

County of Monroe  
Town of City of Rochester

**PERIOD STUDIED**

From 1/1/2005  
To: 5/10/2000  
41 Months

(1) No.  
(2) Date  
(3) Time

L R S  
v s L R S  
e e g o u  
h v h a r  
i e t d f w  
c r c c a  
i i o o h  
e t n n e  
d d r

(10)  
Apparent Contributing Factors

(11)  
Type

**Diagram: East Main**

---

**County of Monroe**

**Town of City of Rochester**

---

**DETAILS OF  
ACCIDENT HISTORY**

---

**Sear-Brown Group**

<b>Street Name:</b>	East Main St Corridor		
<b>Route Number:</b>			
<b>Location:</b>	East Main St	To:	Union Street
<b>Milepost:</b>	University Ave	File	
<b>Date of Report:</b>	1/13/200		
<b>P.I.N.</b>			
<b>Case No.</b>			
<b>Page Number</b>	4		
<b>By</b>			

P.I.N. \_\_\_\_\_  
Case No. \_\_\_\_\_  
File \_\_\_\_\_  
By \_\_\_\_\_  
Page Number 4

Diagram: East Main

County of Monroe

Town of City of Roc

**DETAILS OF  
ACCIDENT HISTORY**

Sear-Brown Group

<u>PERIOD STUDIED</u>
From 1/1/2005
To: 5/10/2000
41 Months

(1) No.	(2) Date	(3) Time	C r i e t e s y	C C o o n d d	C C t h n e d r	(10) Apparent Contributing Factors		(11) Acc. Type	(12) Description
						h	r		
1082	9/1/2005	16:06	2	PDO		1	1	145	Unkn V1's mirror struck V2 (45) Oversized Vehicle
1084	2/1/2006	14:56	2	PDO		1	1	2	REnd V2 stopped and V1 tried to go around it but clipped the
1091	8/29/2007	19:27	1	PDO		1	1	1	FixO V1 swerved into Pole
1093	2/2/2006	1:09	1	PDO		4	1	1	FixO (2) Alcohol Involvement
1094	1/17/2007	2	PDO			0	1	1	REnd E. Main St. @ Union St
1095	4/14/2006	21:14	2	Inj		4	1	1	Unkn E. Main St. @ Union St.
1097	1/1/2005	18:32	2	Inj		4	1	1	RAng E. Main St. @ Pittin St (2) Alcohol Involvement
1099	10/25/2005	7:36	2	Inj		1	1	317.17	RAng E. Main St. @ Pittin St (17) Traffic Control Disregarded
1100	5/3/2007	23:50	PDO			4	2	1	REnd V2 stopped at red light, v1 REv2, then backed up and
1101	2/9/2007	13:45	Inj			1	2	2	Involvement (9) Following Too Closely
1102	2/27/2007	9:20	PDO			1	2	1	REnd V2 stopped at light, V1 RE V2 following too closely (9)
1103	2/27/2008	9:00	PDO			1	2	4	REnd V2 stopped, V1 RE V2, unsafe speed, pavement slipped
1104									Add Accidents under: University Ave + Union St Corridor

**Location:** East Main St  
**Date:** 12-Jan-09

**Town:** City of Rochester

**County:** Monroe

		<b>Milepost:</b> University Ave		<b>To:</b> Union Street							
<b>Time of Day</b>	<b>No. of Accidents</b>	<b>% of Total</b>		<b>Direction</b>	<b># Veh</b>	<b>% of Total</b>		<b>Direction</b>	<b># Veh</b>	<b>% of Total</b>	
6 AM - 10 AM	11	21		North:	10	9.3		NorthEast:	1	0.9	
10:00 AM - 4 PM	19	37		South:	19	18		NorthWest:	1	0.9	
4 PM - 7 PM	10	19		East:	21	20		SouthEast:	5	4.7	
7 PM - 12 MID	10	19		West:	49	46		SouthWest:	1	0.9	
12 MID - 6 AM	2	3.8		Unknown:	0	0					
Unspecified	0	0									
<b>Total</b>	<b>52</b>							<b>Total</b>	<b>107</b>		
<b>Weather</b>		<b>No. of Accidents</b>		<b>Acc. Type</b>	<b># Veh</b>	<b>% of Total</b>		<b>Acc. Type</b>	<b># Veh</b>	<b>% of Total</b>	
Clear:	29	55		Sideswipe:	9	17		Bicycle:	0	0	
Cloudy:	17	32		Rear End:	18	33		Right Turn:	0	0	
Fog:	0	0		Right Angle:	12	22		Driveway:	0	0	
Rain:	7	13		Left Turn:	5	9.3		Backing:	1	1.9	
Sleet:	0	0		Pedestrian:	0	0		Overtaking:	5	9.3	
Snow:	0	0		Fixed Object:	2	3.7		Unknown:	2	3.7	
Unknown:	0	0		Head on:	0	0					
<b>Total</b>	<b>53</b>							<b>Total</b>	<b>54</b>		
<b>Pavement</b>	<b>No. of Accidents</b>			<b>Accident Severity</b>		<b>No. of Accidents</b>		<b>% of Total</b>			
Dry:	38	70		Fatal:		0		0			
Muddy:	0	0		Non-Fatal Injury:		10		19			
Other:	0	0		Property damage only:		44		81			
Slush:	0	0		Non-reportable:		0		0			
Snow/Ice:	3	5.6		<b>Total</b>		54					
Wet:	13	24		<b>Type of Vehicle</b>		<b>No. of Accidents</b>		<b>% of Total</b>			
Unknown:	0	0		Passenger Cars:		108		100			
<b>Total</b>	<b>54</b>			Commercial Vehicles:		0		0			
				<b>Total</b>		108					
<b>Time of Year</b>	<b>No. of Accidents</b>			<b>Light Condition</b>		<b>No. of Accidents</b>		<b>% of Total</b>			
Winter (Dec-Feb)	15	28		Dark Road-Lighted:		12		22			
Spring (Mar-May)	16	30		Dark Road-Unlighted:		0		0			
Summer (Jun-Aug)	11	20		Dawn:		0		0			
Fall (Sep-Nov)	12	22		Daylight:		40		74			
<b>Total</b>	<b>54</b>			Dusk:		1		1.9			
				<b>Unknown:</b>		1		1.9			
				<b>Total</b>		<b>54</b>					

Diagram: University		Street Name: University Ave Corridor		P.I.N. _____
County of Monroe		Route Number:		Case No. _____
Town of City of Rochester		Location: University Ave		File _____
Sear-Brown Group		Milepost: E. Main St To: Union St		By _____
PERIOD STUDIED		Date of Report: 1/13/2000		Page Number 1
(4)	(5)	(6)	(7) (8) (9)	
From 4/2/2005	To 4/9/2008	V S L R S	g o u a r W	
37 Months		e e h v t d f	i e c r i o o n n e	
		d d d d	c C C a	
			t n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	
			e t n	
			i e r	
			c r i	
			i o o	
			o o n	
			n n e	
			r d d	
			y d d	
			s y d	

<b>DETAILS OF ACCIDENT HISTORY</b>	
County of Monroe Town of Sear-Brown Group	

**PERIOD STUDIED**

From 4/2/2005  
To: 4/9/2008  
37 Months

(4) (5) (6) (7) (8) (9)

Diagram: University

Time

14:48

14:25

21:47

17:28

22:40

8:00

Date

10/4/2007

11/3/2007

12/18/2007

4/9/2008

4/2/2005

4/4/2007

2022

Street Name: University Ave Corridor

Route Number:

University Ave

Location:

E. Main St

Milepost:

To: Union St

Date of Report:

1/13/200

P.I.N.

Case No.

File

By

Page Number

2

(1) No.	(2) Date	(3) Time	(4) PDO	(5) Inj	(6) PDO	(7) PDO	(8) Inj	(9) PDO	(10) Factors	(11) Contributing Factors	(12) Description
2016	10/4/2007	14:48							1 1 1	1 1 1	Left (7) Failure to Yield Right of Way
2017	11/3/2007	14:25		Inj					1 1 1	1 1 1	RAng (20) Unsafe Lane Changing (7) Failure to Yield Right of Way
2018	12/18/2007	21:47			PDO				4 1	4 1	RAng
2019	4/9/2008	17:28			PDO				1 1	1 1	RAng (7) Failure to Yield Right of Way
2020	4/2/2005	22:40		Inj					4 1	1 1	Left 16648 rmp W. Main St. to NY940T E. Main St
2021	4/4/2007	8:00			PDO				1 1	2 3	Over 16648 rmp W. Main St. to NY940T E. Main St
2022											Add Accidents under: E. Main Street + Union St. Corridors

Location: University Ave  
13-Jan-09

Town: City of Rochester

County: Monroe

Time of Day			Milepost: E. Main St			To: Union St			% of Total		
Weather	No. of Accidents	% of Total	Direction	# Veh	% of Total	Direction	# Veh	% of Total	Acc. Type	# Veh	% of Total
Clear:	10	50	North:	25	63	NorthEast:	1	2.5	Sideswipe:	1	5
Cloudy:	6	30	South:	3	7.5	NorthWest:	1	2.5	Rear End:	6	30
Fog:	0	0	East:	0	0	SouthEast:	1	2.5	Right Angle:	6	30
Rain:	3	15	West:	9	23	SouthWest:	0	0	Left Turn:	2	10
Sleet:	0	0	Unknown:	0	0	Total			Bicycle:	1	5
Snow:	1	5	Total			Right Turn:	0	0	Driveway:	0	0
Unknown:	0	0	Total			Backing:	0	0	Overtaking:	4	20
Total	20		Total			Unknown:	0	0	Head on:	0	0
Weather No. of Accidents			Acc. Type # Veh % of Total			Acc. Type # Veh % of Total			Acc. Type # Veh % of Total		
Dry:	13	65	Fatal:	0	0	Bicycle:	1	5	Right Turn:	0	0
Muddy:	0	0	Non-Fatal Injury:	4	20	Driveway:	0	0	Backing:	0	0
Other:	0	0	Property damage only:	16	80	Overtaking:	4	20	Unknown:	0	0
Slush:	0	0	Non-reportable:	0	0	Total			Total		
Snow/Ice:	1	5	Total	20		Total			Total		
Wet:	6	30	Type of Vehicle			Type of Vehicle	No. of Accidents	% of Total	Type of Vehicle		
Unknown:	0	0	Passenger Cars:			Passenger Cars:	41		Passenger Cars:		
Total	20		Commercial Vehicles:			Commercial Vehicles:			Commercial Vehicles:		
Time of Year			Light Condition			Light Condition	No. of Accidents	% of Total	Light Condition		
Winter (Dec-Feb)	6	30	Dark Road-Lighted:			Dark Road-Lighted:	5	25	Dark Road-Unlighted:	0	0
Spring (Mar-May)	6	30	Dark Road-Unlighted:			Dark Road-Unlighted:	0	0	Dawn:	0	0
Summer (Jun-Aug)	6	30	Dawn:			Dawn:	0	0	Daylight:	15	75
Fall (Sep-Nov)	2	10	Daylight:			Daylight:	15	75	Dusk:	0	0
Total	20		Dusk:			Dusk:	0	0	Unknown:	0	0
Total			Unknown:			Unknown:	0	0	Total		

DETAILS OF ACCIDENT HISTORY		Diagram: East Ave/U County of Monroe Sear-Brown Group		Street Name: East Ave Corridor Route Number: Location: East Ave/Union St Milepost: To: Union St.		Date of Report: 1/13/2000 P.I.N. _____ Case No. _____ File _____ By _____ Page Number 1		
PERIOD STUDIED		(4) From 9/13/2000	(5) To 4/2/2008	(6) Months 32	(7) (8) (9)	(10)	(11)	(12)
(1) No.	(2) Date	(3) Time 8:38	V S L R S	e e h v t	i e c r i o o o	Apparent Contributing Factors	Acc. Type	Description
			d d d d	a a f e	c C C a			
			d r	W				
3011	8/5/2006	PDO	4	1	1	117	Left	(17) Traffic Control Disregarded
3012	7/21/2006	20:01 2 Inj	-	1	1		REnd	V1 stopped abruptly rear ended by V2.
3018	9/13/2005	8:06 PDO	1	1	1	14,18	Rght	V1 was turning right and turned into V2 (4) Driver inattention (18) Turning Improperly
3019	9/15/2005	18:03 PDO	1	1	1	17,4	Unkn	V3 stopped to let V1 into traffic, V2 struck V1 making a left (7) Failure to Yield Right of Way (4) Driver Inattention
3020	9/16/2005	22:10 PDO	4	1	1		RAng	V1 went the wrong way on N. Union, entered intersection and struck V2 (4) Driver Inattention
3021	10/2/2005	4:00 PDO	4	1	1	14	RAng	
3022	1/6/2006	22:45 PDO	4	1	4		RAng	
3023	6/3/2006	20:59 Inj	4	1	2	364,7	Left	(64) Obstruction/Debris (7) Failure to Yield Right of Way
3024	6/5/2006	11:53 Inj	-	1	1	1	RAng	
3025	6/7/2006	20:10 PDO	1	1	1	17	RAng	(17) Traffic Control Disregarded
3026	8/24/2006	15:43 PDO	1	1	1	117	RAng	(17) Traffic Control Disregarded
3027	8/22/2006	16:21 PDO	-	1	1	27	Rght	(7) Failure to Yield Right of Way
3028	11/20/2006	10:15 PDO	1	1	2	217	RAng	(17) Traffic Control Disregarded
3029	12/17/2006	20:14 PDO	4	1	2	2,17	RAng	(17) Traffic Control Disregarded

**DETAILS OF  
ACCIDENT HISTORY**

---

Sear-Brown Group

Diagram: East Ave/U

County of Monroe  
Town of City of Rochester

**PERIOD STUDIED**

From	9/13/2000	(4)	(5)	(6)	(7)	(8)	(9)
To:	4/2/2008	V	S	L	R	S	
32 Months		e	e	g	o	u	
		h	v	h	a	r	W
		i	e	t	d	f	e
		c	r	c	c	c	a
		i	i	o	o	o	h
		e	t	n	n	n	
		s	y	d	d	d	
		10:23	6	Inj	1	1	2,17
		12/23/2006			1	1	

(1) No.	(2) Date	(3) Time	(4) Y	(5) d	(6) d	(7) r	(8) f	(9) t	(10)
3030	1/4/2007	10:23	6	Inj	1	1	2,17		
3031	1/4/2007	11:21		Inj	1	1	11,7		
3032	1/12/2007	18:12		PDO	4	1	3,7,69		
3033	5/8/2007	11:51		PDO	1	1	11,17		
3034	4/2/2008	20:23		PDO	3	1	11,69		
3035	11/2/2005	21:57		PDO	4	1	11,8		
3036	4/22/2006	21:57		PDO	4	1	1,17		
3037	6/7/2006	20:10		PDO	1	1	11,7		
3038									

Street Name:	East Ave Corridor
Route Number:	
Location:	East Ave/Union St
Milepost:	
Date of Report:	1/13/2000
To: Union St.	

P.I.N. \_\_\_\_\_

Case No. \_\_\_\_\_  
File \_\_\_\_\_  
By \_\_\_\_\_

Page Number 2

										(12) Description	
(1) No.	(2) Date	(3) Time	(4) Y	(5) d	(6) d	(7) r	(8) f	(9) t	(10)	(11) Apparent Contributing Acc. Type	(12) Description
3030	12/23/2006	10:23	6	Inj	1	1	2,17			Rang	V1 hit V2, force V2 over the curb , hit parked V3&4 (17) Traffic Control Disregarded
3031	1/4/2007	11:21		Inj	1	1	11,7			Rang	V1 & 2 collided and caused V1 to spin out and strike parked V3 & 4. (17) Traffic Control Disregarded
3032	1/12/2007	18:12		PDO	4	1	3,7,69			Rang	(7) Failure to Yield Right of Way
3033	5/8/2007	11:51		PDO	1	1	11,17			Rang	(7) Failure to Yield Right of Way (69) View Obstructed/Limited
3034	4/2/2008	20:23		PDO	3	1	11,69			Rang	(7) Failure to Yield Right of Way (17) Traffic Control Disregarded
3035	11/2/2005	21:57		PDO	4	1	11,8			Left	V2 it out of drive, view obstructed by parked veh, was struck by V1 westbound (7) Failure to Yield Right of Way (69) View Obstructed/Limited
3036	4/22/2006	21:57		PDO	4	1	1,17			Rang	East Ave @ Union St (17) Traffic Control Disregarded
3037	6/7/2006	20:10		PDO	1	1	11,7			Rang	East Ave @ N. Union St (17) Traffic Control Disregarded
3038											Add accidents found: Pitkin St. corridor

Location: East Ave/Union  
 Town: City of Rochester  
 County: Monroe  
 13-Jan-09

Time of Day	No. of Accidents	% of Total	Milepost:		% of Total	Direction # Veh	To: Union St.	% of Total
			Direction	# Veh				
6 AM - 10 AM	1	4.5	North:	17	34	NorthEast:	1	2
10:00 AM - 4 PM	6	27	South:	5	10	NorthWest:	1	2
4 PM - 7 PM	3	14	East:	12	24	SouthEast:	0	0
7 PM - 12 MID	10	45	West:	14	28	SouthWest:	0	0
12 MID - 6 AM	2	9.1	Unknown:	0	0			
Unspecified	0	0				Total	50	
<b>Total</b>	<b>22</b>							
Weather No. of Accidents			Acc. Type # Veh		% of Total	Acc. Type # Veh		% of Total
Clear:	15	68	Sideswipe:	0	0	Bicycle:	0	0
Cloudy:	4	18	Rear End:	1	4.5	Right Turn:	2	9.1
Fog:	0	0	Right Angle:	14	64	Driveway:	0	0
Rain:	2	9.1	Left Turn:	4	18	Backing:	0	0
Sleet:	0	0	Pedestrian:	0	0	Overtaking:	0	0
Snow:	1	4.5	Fixed Object:	0	0	Unknown:	1	4.5
Unknown:	0	0	Head on:	0	0	Total	22	
<b>Total</b>	<b>22</b>							
Pavement No. of Accidents			Accident Severity		No. of Accidents	% of Total		
Dry:	17	77	Fatal:		0	0		
Muddy:	0	0	Non-Fatal Injury:		5	23		
Other:	0	0	Property damage only:		17	77		
Slush:	0	0	Non-reportable:		0	0		
Snow/Ice:	1	4.5	<b>Total</b>		<b>22</b>			
Wet:	4	18						
Unknown:	0	0	Type of Vehicle		No. of Accidents	% of Total		
<b>Total</b>	<b>22</b>		Passenger Cars:		50	94		
			Commercial Vehicles:		3	5.7		
			<b>Total</b>		<b>53</b>			
Time of Year No. of Accidents			Light Condition		No. of Accidents	% of Total		
Winter (Dec-Feb)	5	23	Dark Road-Lighted:		9	41		
Spring (Mar-May)	3	14	Dark Road-Unlighted:		0	0		
Summer (Jun-Aug)	8	36	Dawn:		0	0		
Fall (Sep-Nov)	6	27	Daylight:		12	55		
<b>Total</b>	<b>22</b>		Dusk:		1	4.5		
			Unknown:		0	0		
			<b>Total</b>		<b>22</b>			

**DETAILS OF  
ACCIDENT HISTORY**

---

County of Monroe  
Town of City of Rochester  
Sear-Brown Group

Diagram: Union St.

Route Number:

Union St.

Street Name: Union St. Corridor

Route Number:

S. Union St

PERIOD STUDIED		Date	Time	Day	Year	Contributing Factors	Type	Description
From 3/17/200	To: 5/31/200	39 Months	2:27	PDO	4	1 2 320	Over	V1 ENTERED V2'S LANE AND STRUCK V2 (20) Unsafe Lane Changing
4001	10/28/2006	7/23/2006	8:48	PDO	1	1 218	Unkn	V1 TURNED IN FRON OF V2 IN AN ATTEMPT TO TURN INTO A DRIVEWAY (18) Turning Improperly

**PERIOD STUDIED**

From 3/17/200

To: 5/31/200

39 Months

(4) (5) (6) (7) (8) (9)

v s L R S

e e g o u

h v h a r

i e t d f

c r C C t

i i o o h

e t n n e

d d r

(10)

o o o

h

a r

w

e

a

c

c

c

t

a

(11)

Apparent

Contributing

Acc.

Type

V1 ENTERED V2'S LANE AND STRUCK V2 (20) Unsafe Lane Changing

V1 TURNED IN FRON OF V2 IN AN ATTEMPT TO TURN INTO A DRIVEWAY (18) Turning Improperly

V1 EXITING LOT STRUCK V2 ENTERING PARKING LOT (18) Turning Improperly

V1 STRUCK PARKING SIGN (4) Driver Inattention

V1 (MOTORCYCLE) STOPPED TO turn RIGHT INTO PARKING LOT (26) Reaction to Other Uninvolved Vehicle

V2 STRUCK V1 AS V1 WAS MAKING LEFT TURN

RAng

V1 FAILED TO STOP FOR RED LIGHT & STRUCK V2 (7) Failure to Yield Right of Way

RAng

V2 TURNED LEFT IN FRONT OF V1. V1 STRUCK V2 (13) Passing or Lane Usage Improper (17) Traffic Control Disregarded

Left

V2 TURNED LEFT IN FRONT OF V1, V1 STRUCK V2 (18) Turning Improperly (20) Unsafe Lane Changing

RAng

V2 RAN RED LIGHT & STRUCK V1. V2 FLED SCENE (7) Traffic Control Disregarded

Back

V1 BACKED INTO V2 WHILE V2 WAS PARKED

Left

V2 TURN LEFT, V1 STRUCK V2 BOTH IN LEFT LANES (13) Passing or Lane Usage Improper

FixO

V1 SWERVED TO AVOID V2, STRUCK CURB (26) Reaction to Other Uninvolved Vehicle

<b>DETAILS OF ACCIDENT HISTORY</b>	
County of Monroe	Diagram: Union St.
Town of City of Rochester	Street Name: Union St. Corridor
Sear-Brown Group	Route Number:

**PERIOD STUDIED**  
 From 3/17/2000  
 To: 5/31/2000  
 39 Months

(1) (2) No. Date		(3) Time	(4) Factors	(5) Contributing Factors	(6) Apparent Acc. Type	(7) (8) (9)	(10)	(11) Acc. Type	(12)
4019	5/5/2006	8:45	PDO	1 1	1 14	Side	V1 STARTED TO SWITCH LANES & SIDESWIPED V2 (4) Driver Inattention		
4021	3/31/2006	11:07	Inj	1 1	1 19	REnd	V2 STOPPED & V1 REAR-ENDED V2 (9) Following Too Closely		
4022	10/30/2005	1:30	PDO	4 1	1 14	Back	V1 WAS PARKED & V2 WAS STOPPED AT CORNER. V1 BACKED INTO V2 (4) Driver Inattention		
4023	12/10/2005	17:18	PDO	4 1	1 14	REnd	V2 STOPPED & TRAFFIC LIGHT & V1 REAR-ENDED V2 (4) Driver Inattention		
4025	5/31/2006	23:50	PDO	4 1	1 24	Side	V2 TURNED RIGHT INTO THE PARK LOT STRUCK V2 (4) Driver Inattention		
4026	1/22/2008	10:52	PDO	1 1	1 23	Back	V1 PARKED IN DRIVEWAY & STRUCK V2 STOPPED IN TRAFFIC (3) Backing Unsafely		
4027	10/12/2007	14:32	Inj	1 1	1 14	REnd	V1 (RTS BUS) REAR-ENDED V2. (4) Driver Inattention		
4028	8/12/2007	2:41	PDO	4 1	1 17,17	RAng	V1 (RTS BUS) REAR-ENDED BY V1 WHICH THEN FLED SCENE (7) Failure to Yield Right of Way (17) Traffic Control Disregarded		
4029	2/16/2007	2:25	PDO	4 1	4 4,2,19	Unkn	V1 HIGH RATE OF SPEED, SLID ICY ROAD CURB (2) Alcohol Involvement (19) Unsafe Speed		
4031	5/20/2006	1:02	PDO	4 1	2 3,26	REnd	V2 AVOID UNKNOWN VEHICLE, REAR-ENDED BY V1 (9) Following Too Closely (26) Reaction to Other Uninvolved Vehicle		
4032	11/17/2005	0:30	PDO	4 1	1 22	FixO	V1 SWERVED OFF ROAD OVER CURB, STRUCK TREE (2) Alcohol Involvement		
4033	4/4/2008	8:40	PDO	1 1	2 3,2,7	Side	V1 CHANGED LANES & struck v2 (20) Unsafe Lane Changing (7) Failure to Yield Right of Way		
4035	6/9/2006	14:00	PDO	1 1	1 2,20	Left	V1 WAS CHANGING LANES WHEN IT STRUCK V2 (20) Unsafe Lane Changing		
4036	8/26/2005	1:49	PDO	1 1	1 2,2,3	Left	V1 BACKING DOWN STREET INTO V2. (2) Alcohol Involvement (3) Backing Unsafely		

Diagram: Union St.	Street Name: Union St. Corridor	P.I.N. _____
County of Monroe	Route Number:	Case No. _____
Town of City of Rochester	Location: Union St.	File _____
Milepost: S. Union St	To: E. Main St	By _____
Date of Report: 1/13/2000	Page Number	2

<b>DETAILS OF ACCIDENT HISTORY</b>
Sear-Brown Group

Diagram: Union St.

County of Monroe

Town of City of Rochester

<b>PERIOD STUDIED</b>	
From 3/17/200	(4)
To: 5/31/200	(5)
39 Months	(6) (7) (8) (9)

Street Name: Union St. Corridor

Route Number:

Location: Union St.

Milepost: S. Union St To: E. Main St

Date of Report: 1/13/200

P.I.N. _____
Case No. _____
File _____
By _____
Page Number 3

(1) No.	(2) Date	(3) Time	(4) PDO	(5) V	(6) S	(7) e	(8) e	(9) h	(10) o	(11) Apparent Acc. Type	(12) Description
4037	4/29/2006	1:34	PDO	i	i	e	t	n	n	o	Left Unsafe Speed
4038	3/11/2008	15:43	PDO	i	i	s	y	d	d	h	REnd V2 PARKED WHEN V1 SWERVED
4041	5/31/2008	4:32	PDO	4	4	v	e	a	a	c	Rang V1 VEHICLE WOULD NOT TURN & STRUCK CURB
4043	3/31/2006	11:07	Inj	1	1	h	v	t	d	t	REnd V1 EXITED INNER LOOP & STRUCK V2
4044	1/2/2006	22:55	PDO	4	1	h	h	h	d	r	REnd V1 REAR-ENDED V2 PARKED
4045	4/5/2008	2:45	PDO	4	1	2	2	2	2	2	REnd V1 ATTEMPTED TO STOP & REAR-ENDED V2
4046	3/15/2008	13:50	PDO	1	1	1	1	1	1	1	Rang V2 ENTERED INTERSECTION & WAS STRUCK BY V1
4047	12/12/2007	17:59	PDO	4	1	2	4	2	4	2	REnd V2 STOPPED TO AVOID ANOTHER V & WAS REAR-ENDED BY V1
4049	2/22/2008	19:15	PDO	4	1	2	4	2	4	2	REnd V2 STOPPED AT RED LIGHT AND WAS REAR-ENDED BY V1
4050	3/17/2005	23:41	PDO	4	1	1	1	1	1	2	Back V1 TURNED THE WRONG WAY ONTO ONE-WAY STREET, THEN BACKED UP & STRUCK V2
4051	3/31/2006	11:07	Inj	1	1	1	1	1	1	1	REnd S. Union St @ Griffith St
4052											Add accidents found: E. Main+ University+East Ave+Broad+Monroe corridors

Location: Union St.  
13-Jan-09

Town: City of Rochester

County: Monroe

Time of Day			Milepost: S. Union St			To: E. Main St		
			Direction	# Veh	% of Total	Direction	# Veh	% of Total
6 AM - 10 AM	5	13	North:	41	56	NorthEast:	4	5.5
10:00 AM - 4 PM	10	26	South:	9	12	NorthWest:	5	6.8
4 PM - 7 PM	4	10	East:	6	8.2	SouthEast:	2	2.7
7 PM - 12 MID	7	18	West:	6	8.2	SouthWest:	0	0
12 MID - 6 AM	13	33	Unknown:	0	0			
Unspecified	0	0				Total	73	
Total	39							
Weather			Acc. Type	# Veh	% of Total	Acc. Type	# Veh	% of Total
Clear:	19	49	Sideswipe:	3	7.7	Bicycle:	0	0
Cloudy:	15	38	Rear End:	11	28	Right Turn:	1	2.6
Fog:	0	0	Right Angle:	7	18	Driveway:	1	2.6
Rain:	3	7.7	Left Turn:	6	15	Backing:	4	10
Sleet:	0	0	Pedestrian:	0	0	Overtaking:	1	2.6
Snow:	2	5.1	Fixed Object:	3	7.7	Unknown:	2	5.1
Unknown:	0	0	Head on:	0	0	Total	39	
Total	39							
Pavement			Accident Severity		No. of Accidents	% of Total		
Dry:	28	74	Fatal:		0	0		
Muddy:	0	0	Non-Fatal Injury:		5	13		
Other:	0	0	Property damage only:		34	87		
Slush:	1	2.6	Non-reportable:		0	0		
Snow/Ice:	1	2.6	Total		39			
Wet:	8	21	Type of Vehicle		No. of Accidents	% of Total		
Unknown:	0	0	Passenger Cars:		73			
Total	38		Commercial Vehicles:					
			Total					
Time of Year			Light Condition		No. of Accidents	% of Total		
Winter (Dec-Feb)	8	21	Dark Road-Lighted:		21	54		
Spring (Mar-May)	16	41	Dark Road-Unlighted:		0	0		
Summer (Jun-Aug)	8	21	Dawn:		0	0		
Fall (Sep-Nov)	7	18	Daylight:		18	46		
Total	39		Dusk:		0	0		
			Unknown:		0	0		
			Total		39			

**DETAILS OF  
ACCIDENT HISTORY**

County of Monroe  
Town of City of Rochester

Diagram: Monroe Av

Sear-Brown Group

**PERIOD STUDIED**

(4) From	1/4/2005	(5) (6)	(7)	(8)	(9)	
To:	5/28/2000	V	S	L	R	S
41 Months		e	g	o	u	
		h	a	r	w	
		v	t	d	f	
		i	e	c	c	a
		c	r	c	c	
		i	i	o	o	
		e	t	n	n	
		s	y	n	n	
		d	d	d	d	
		y	d	d	d	

Street Name:	Monroe Ave Corridor
Route Number:	
Location:	Monroe Ave
Milepost:	Chestnut
To:	Alexander St.
Date of Report:	1/13/2000

P.I.N. \_\_\_\_\_  
Case No. \_\_\_\_\_  
File \_\_\_\_\_  
By \_\_\_\_\_  
Page Number 1

(1) No.	(2) Date	(3) Time	4	5	6	7	8	9	(10) Contributing Factors			(12) Description
									R	A	G	
5001	5/18/2006	13:44	PDO	-	-	-	1	2	27	RAng	V1 WENT THRU RED LIGHT & STRUCK V2 (7) Failure to Yield Right of Way	
5002	7/8/2006	12:22	PDO	-	-	-	1	1	19	REnd	V2 STOPPED IN TRAFFIC & WAS REAR-ENDED BY V1 (9) Following Too Closely	
5003	11/7/2007	22:45	PDO	-	-	-	4	1	217	RAng	V1 WENT THRU A RED LIGHT & WAS STRUCK BY V2 (17) Traffic Control Disregarded	
5004	5/28/2008	22:59	PDO	-	-	-	4	1	17,18	RAng	V1 MAKE A WRONG TURN ON A ONE WAY ST. V1 THEN MADE A U-TURN & STRUCK V2 (7) Failure to Yield Right of Way (18) Turning Improperly	
5005	6/3/2006	19:52	Inj	-	-	-	1	1	217	RAng	V2 WENT THRU RED LIGHT & WAS STRUCK BY V1. V2 THEN STRUCK V3 (17) Traffic Control Disregarded	
5006	1/4/2005	10:15	PDO	-	-	-	1	1	24,7	RAng	V2 ATTEMPTED TO MAKE A LEFT TURN & WAS STRUCK BY V1 (4) Driver Inattention (7) Failure to Yield Right of Way	
5007	6/22/2006	8:48	PDO	-	-	-	1	1	24	REnd	V2 STOPPED, V1 LIGHT TURN GREEN & THOUGHT V2 HAD STARTED TO MOVE (4) Driver Inattention	
5008	7/28/2006	23:05	Inj	-	-	-	4	1	14	REnd	V2 STOPPED TO MAKE A LEFT TURN WHEN V1 REAR-ENDED V2 (4) Driver Inattention	
5009	7/5/2005	15:00	PDO	-	-	-	1	1	217	Side	V1 ATTEMPTED TO ENTER TRAFFIC & STRUCK V2 (7) Failure to Yield Right of Way	
5010	12/31/2005	19:43	Inj	-	-	-	4	1	14,7	REnd	V2 STOPPED TO turn LEFT, V1 REAR-ENDED V2 (4) Driver Inattention (7) Failure to Yield Right of Way	
5011	9/25/2005	15:21	PDO	-	-	-	1	1	117,7	RAng	V2 ran A RED LIGHT & STRUCK BY V1 (17) Traffic Control Disregarded (7) Failure to Yield Right of Way	
5012	12/22/2005	0:06	PDO	-	-	-	4	1	218,69	Dry	V1 EXITED PARKING LOT INTO PATH OF V2 (18) Turning Improperly (68) View Obstructed/Limited	
5013	2/24/2006	9:02	PDO	-	-	-	1	1	217	Right	V2 TURNED IN FRONT OF V1 & WAS STRUCK BY V1 (7) Failure to Yield Right of Way	
5014	6/22/2007	17:51	PDO	-	-	-	1	1	1	Rght	V1 TURNED RIGHT & STRUCK PARKED V2, PUSHING IT INTO V3	

**DETAILS OF  
ACCIDENT HISTORY**

Sear-Brown Group

**PERIOD STUDIED**

From	1/4/2005	(4)	(5)	(6)	(7)	(8)	(9)
To:	5/28/2000	V	S	L	R	S	
41 Months		e	e	g	o	u	
		h	v	h	a	r	
		i	e	t	f	w	
		c	r	c	c	a	
		i	i	o	o	o	
		e	e	n	n	h	
		t	y	d	d	a	
			d	d	r		

Diagram: Monroe Av

County of Monroe  
Town of City of Rochester

Street Name: Monroe Ave Corridor

Route Number:

Monroe Ave

Location: Monroe Ave

Milepost: Chestnut

To: Alexander St.

Date of Report: 1/13/2000

P.I.N.	_____
Case No.	_____
File	_____
By	_____
Page Number	2

(1) No.	(2) Date	(3) Time	(4) PDO	(5) PDO	(6) PDO	(7) PDO	(8) PDO	(9) PDO	(10) Factors	(11) Contributing Acc. Type	(12) Description
5015	3/28/2007	17:25								REnd	V1 REAR-ENDED V2 (9) Following Too Closely
5016	3/31/2008	14:33								REnd	V1 REAR-ENDED V2 (26) Reaction to Other Uninvolved Vehicle (26) Reaction to Other Uninvolved
5017	7/22/2005	16:47								Side	V1 PULLED INTO TRAFFIC FROM CURB & STRUCK V2 (7) Failure to Yield Right of Way
5019	9/28/2007	0:15								Side	V2 PARKED , STRUCK BY ANOTHER VEHICLE
5020	4/5/2008									Side	V1 (UNKNOWN) SIDESWIPED V2 & V3 AS both PARKED (13) Passing or Lane Usage Improper
5023	3/14/2008	14:08								REnd	V2 SLOWED FOR TRAFFIC, V1 REAR-ENDED V2. (9) Following Too Closely (42) Brakes Defective
5024	3/14/2008	14:08								REnd	V2 SLOWED FOR TRAFFIC, V1 REAR-ENDED V2. (9) Following Too Closely (42) Brakes Defective
5025	7/13/2007	2:11								Rght	V1 WRONG WAY-ONE WAY ST., TURNED RIGHT & STRUCK PEDESTRIAN (4) Driver Inattention
5026	6/13/2005	14:36								REnd	V2 STOPPED IN TRAFFIC & WAS REAR-ENDED BY V1 (9) Following Too Closely
5028	7/8/2005	2:08								REnd	V2 PARKED. V1 REAR-ENDED V2, THEN STRUCK SIGN & WALL (2) Alcohol Involvement (13) Passing or Lane Usage Improper
5029	1/21/2005	15:49								REnd	V2 STOPPED FOR LIGHT WHEN LIGHT TURNED GREEN, V1 REAR-ENDED V2 (9) Following Too Closely
5031	2/19/2006	1:58								REnd	V2 PARKED. V1 STRUCK V2 & FLED SCENE.
5032	9/27/2005	1:10								FixO	V1 OVER CURB & STRUCK TREE
5033	10/7/2005	13:20								Rght	V1 PULLED FROM CURB INTO TRAFFIC & STRUCK V2 (7) Failure to Yield Right of Way

Diagram: Monroe Av  
County of Monroe  
Town of City of Rochester

**DETAILS OF  
ACCIDENT HISTORY**

---

Sear-Brown Group

Street Name:	Monroe Ave Corridor	P.I.N.	_____
Route Number:		Case No.	_____
Location:	Monroe Ave	File	_____
Milepost:	Chestnut	By	_____
Date of Report:	1/13/200	Page Number	3

PERIOD STUDIED		Date of Report: 1/13/200				Page Number 3	
From 1/4/2005	To 5/28/200	(4) Date	(5) Time	(6)	(7)	(8)	(9)
Months		5/25/2007	9:58	Inj			
5034	2/18/2007	7:30					
5035	5/25/2007						
5036	4/8/2007	13:06	PDO	1	1	260.13	V1 SLIDE ON SLIPPERY PAVEMENT & STRUCK GUIDE RAIL.. (66) Pavement Slippery
5037	8/20/2007	14:13	PDO	1	1	317	V1 STRUCK V2 WHICH WAS IN THE INTERSECTION. (7) Failure to Yield Right of Way (7) Failure to Yield Right of Way
5038	8/17/2007	17:26	PDO	1	1	39.66	V1 STOPPED MAKE A LEFT TURN. V2 PASS V1 ON LEFT. V1 THEN STRUCK V2 (60) Other
5040	3/19/2006	2:30	PDO	4	1	113	V1 STOPPED, WHEN LIGHT CHANGED V2 ENTERED INTERSECTION & STRUCK BY V1 (17) Traffic Control Disregarded
5041	7/3/2006	1:56	Fat	4	1	1	D1 STRUCK THE MEDIAN and sign (14) Passing or Lane Usage Improper
5042	9/5/2006	20:08	Inj	4	1	217	V1 (MOTORCYCLE) LOST CONTROL & HIT CURB, LIGHT POLE
5044	9/19/2006	10:07	PDO	1	1	117	V1 WENT THRU A RED LIGHT & STRUCK V2 (17) Traffic Control Disregarded
5047	12/27/2005	17:34	Inj	4	1	2.7	V1 (BUS) ENTERED THE INTERSECTION & STRUCK V2. (17) Traffic Control Disregarded
5048	10/26/2007	15:54	Inj	1	1	3	Ref. Mkr. 31 4303 2042 (7) Failure to Yield Right of Way
5049	12/3/2007	11:40	Inj	1	1	44.4	Ref. Mkr. 31 4303 2042 (4) Driver Inattention (4) Driver Inattentio
5051	3/16/2007	21:20	PDO	4	1	418.60	V1 was parallel parking and struck V2, turning improperly, other vehicular (18) Turning Improperly (60) Other Vehicular
5052	5/30/2006	11:22	Inj	1	1	1.14	Bike Monroe Ave @ Linwood Pl (14) Pedestrian's Error/Confusion

P.I.N.	_____
Case No.	_____
File	_____
By	_____
Page Number	4

Diagram:	Monroe Av	
County of Monroe	Route Number:	Monroe Ave
Town of City of Rochester	Location:	Monroe Ave
	Milepost:	Chestnut
	To:	Alexander St.
	Date of Report:	1/13/200

<b>DETAILS OF ACCIDENT HISTORY</b>	
Sear-Brown Group	
<b>PERIOD STUDIED</b>	
From: 1/4/2005	(4)
To: 5/28/2000	(5)
Months: 41	(6) (7) (8) (9)

<b>(1)</b>	<b>(2)</b>	<b>(3)</b>	<b>(4)</b>	<b>(5)</b>	<b>(6)</b>	<b>(7)</b>	<b>(8)</b>	<b>(9)</b>
No.	Date	Time	Day	Year	Month	Year	Month	Year
5053	5/21/2007	15:00	PDO	1	1	14.7		
5054	11/3/2005	0:15	PDO	4	1	14		
5055	7/4/2006	23:14	PDO	4	1	142		
5056								

(1) No.	(2) Date	(3) Time	(4) Day	(5) Year	(6) Month	(7) Year	(8) Month	(9) Year	(10) Apparent Contributing Factors	(11) Apparent Contributing Factors	(12) Description
5053	5/21/2007	15:00	PDO	1	1	14.7			REnd	V1 stopped at signal then drove forward and struck V2, inattention, failure to yield (4) Driver Inattention (7) Failure to Yield Right of Way	
5054	11/3/2005	0:15	PDO	4	1	14			H-On	V1 struck median and sign post, driver Inattention (4) Driver Inattention	
5055	7/4/2006	23:14	PDO	4	1	142			REnd	V1 rear ended V2 who was stopped at light. V1 states breaks defective (42) Brakes Defective	
5056											Additional Accidents on Union Street summary

Location: Monroe Ave			Town: City of Rochester		
13-Jan-09			County: Monroe		
Time of Day	No. of Accidents	% of Total	Milepost: Chestnut	To: Alexander St.	
6 AM - 10 AM	4	9.1	Direction # Veh	% of Total	
10:00 AM - 4 PM	17	39	North: 9	11	Direction # Veh % of Total
4 PM - 7 PM	5	11	South: 13	16	NorthEast: 2 2.4
7 PM - 12 MID	9	20	East: 39	48	NorthWest: 4 4.9
12 MID - 6 AM	9	20	West: 12	15	SouthEast: 2 2.4
Unspecified	0	0	Unknown: 0	0	SouthWest: 1 1.2
Total	44			Total 82	
Weather	No. of Accidents		Acc. Type # Veh	% of Total	
Clear:	22	50	Sideswipe: 5	11	Acc. Type # Veh % of Total
Cloudy:	15	34	Rear End: 17	38	Bicycle: 1 2.2
Fog:	0	0	Right Angle: 11	24	Right Turn: 4 8.9
Rain:	5	11	Left Turn: 1	2.2	Driveway: 1 2.2
Sleet:	0	0	Pedestrian: 0	0	Backing: 0 0
Snow:	2	4.5	Fixed Object: 3	6.7	Overtaking: 0 0
Unknown:	0	0	Head on: 1	2.2	Unknown: 1 2.2
Total	44			Total 45	
Pavement	No. of Accidents		Accident Severity	No. of Accidents	% of Total
Dry:	30	68	Fatal:	1	2.2
Muddy:	0	0	Non-Fatal Injury:	14	31
Other:	0	0	Property damage only:	30	67
Slush:	0	0	Non-reportable:	0	0
Snow/Ice:	1	2.3	Total	45	
Wet:	13	30			
Unknown:	0	0	Type of Vehicle	No. of Accidents	% of Total
Total	44		Passenger Cars:	87	
			Commercial Vehicles:		
			Total		
Time of Year	No. of Accidents		Light Condition	No. of Accidents	% of Total
Winter (Dec-Feb)	9	20	Dark Road-Lighted:	17	39
Spring (Mar-May)	13	29	Dark Road-Unlighted:	0	0
Summer (Jun-Aug)	14	31	Dawn:	0	0
Fall (Sep-Nov)	9	20	Daylight:	27	61
Total	45		Dusk:	0	0
			Unknown:	0	0
			Total	44	

<b>DETAILS OF ACCIDENT HISTORY</b>	
Sear-Brown Group	
<b>PERIOD STUDIED</b>	
From 10/23/20	(4)
To: 5/23/2000	(5)
32 Months	(6) (7) (8) (9)

Diagram: East Broad	Street Name: E. Broad St Corridor
Route Number:	Location: East Broad St
	Milepost: Savannah St To: Union St
Date of Report: 1/13/2000	
P.I.N. _____	Case No. _____
File _____	By _____
Page Number 1	

(1) No.	(2) Date	(3) Time	(4) Contributing Factors	(5) Apparent Acc. Type	(6) Description
7004	5/4/2007	4:05	PDO	4 1 1 17	V1 TURNED LEFT & DROVE OVER MEDIAN & SIGN. (17) Traffic Control Disregarded
7005	11/4/2006	23:39	PDO	4 1 1 13	V1 FAILED TO STOP AT STOP SIGN, WENT ACROSS INTERSECTION & HIT THE FIRE HYDRANT (13) Passing or Lane Usage Improper
7006	10/23/2005	14:05	PDO	1 1 2 34:20	V1 SIDESWIPE V2. V2 DROVE OVER MEDIAN & OVER A STREET SIGN (4) Driver Inattention (20) Unsafe Lane Changing
7007	2/19/2006	2:55	PDO	4 1 4 166	V1 SLID ON BLACK ICE INTO CURB (66) Pavement Slippery (17) Traffic Control Disregarded (17) Traffic Control Disregarded
7008	10/15/2007	14:05	PDO	1 1 1 117, 17	RAng (17) Traffic Control Disregarded (17) Traffic Control Disregarded
7009	5/23/2008	12:40	PDO	1 1 1 117, 13	Left V1 making left out of lot went wrong way down broad st hit v2 going EB (17) Traffic Control Disregarded (13) Passing or Lane Usage Improper
7010					Add accidents found: Pitkin St + Union St Corridors

Location: East Broad St			Town: City of Rochester		
13-Jan-09			County: Monroe		
Time of Day	No. of Accidents	% of Total	Milepost: Savannah St	To: Union St	% of Total
6 AM - 10 AM	0	0	North:	1	11
10:00 AM - 4 PM	3	50	South:	1	11
4 PM - 7 PM	0	0	East:	5	56
7 PM - 12 MID	1	17	West:	2	22
12 MID - 6 AM	2	33	Unknown:	0	0
Unspecified	0	0			Total 9
Total	6				
Weather	No. of Accidents		Acc. Type	# Veh	% of Total
Clear:	5	83	Sideswipe:	1	17
Cloudy:	0	0	Rear End:	0	0
Fog:	0	0	Right Angle:	1	17
Rain:	1	17	Left Turn:	1	17
Sleet:	0	0	Pedestrian:	0	0
Snow:	0	0	Fixed Object:	2	33
Unknown:	0	0	Head on:	0	0
Total	6				Total 6
Pavement	No. of Accidents		Accident Severity	No. of Accidents	% of Total
Dry:	4	67	Fatal:	0	0
Muddy:	0	0	Non-Fatal Injury:	0	0
Other:	0	0	Property damage only:	6	100
Slush:	0	0	Non-reportable:	0	0
Snow/Ice:	1	17	Total	6	
Wet:	1	17			
Unknown:	0	0	Type of Vehicle	No. of Accidents	% of Total
Total	6		Passenger Cars:	9	
			Commercial Vehicles:		
			Total		
Time of Year	No. of Accidents		Light Condition	No. of Accidents	% of Total
Winter (Dec-Feb)	1	17	Dark Road-Lighted:	3	50
Spring (Mar-May)	2	33	Dark Road-Unlighted:	0	0
Summer (Jun-Aug)	0	0	Dawn:	0	0
Fall (Sep-Nov)	3	50	Daylight:	3	50
Total	6		Dusk:	0	0
			Unknown:	0	0
			Total	6	

Diagram: Pitkin St			Street Name: Pitkin St	P.I.N. _____	
County of Monroe Town of City of Rochester			Route Number: _____	Case No. _____	
			Location: Pitkin St	File _____	
			Milepost: E. Main St	By _____	
			To: Chestnut/Mon		
			Date of Report: 1/13/200	Page Number 1	
<b>PERIOD STUDIED</b>					
From 10/23/20	(4)	(5)	(6)	(7) (8) (9)	
To: 5/23/200	V	S	L R S	G O U	
32 Months	e e	e e	h h a r	f f W e	
	h i	v v t d	c c C C a	i e t d d r	
	c r	c r	c o o	c r	
	i i	i o	o o	i o	
	e e	t n	n n e	e t	
	s y	d d	d d r	s y	
	(10)	(11)	(12)	(13)	
	Apparent Contributing Factors	Contributing Acc.	Description		
7004	5/4/2007	4:05	PDO	4 1 1 117	FixO V1 TURNED LEFT & DROVE OVER MEDIAN & SIGN. (17) Traffic Control Disregarded
7005	11/4/2006	23:39	PDO	4 1 1 113	FixO V1 FAILED TO STOP AT STOP SIGN, WENT ACROSS INTERSECTION & HIT THE FIRE HYDRANT (13)
7006	10/23/2005	14:05	PDO	1 1 2 34:20	FixO Passing or Lane Usage Improper
7007	2/19/2006	2:55	PDO	4 1 4 166	Side V1 SIDESWIPED V2. V2 DROVE OVER MEDIAN & OVER A STREET SIGN (4) Driver Inattention (20)
7008	10/15/2007	14:05	PDO	1 1 1 117, 17	Unkn V1 SLID ON BLACK ICE INTO CURB (6) Pavement Slippery
7009	5/23/2008	12:40	PDO	1 1 1 117, 13	RAng (17) Traffic Control Disregarded (17) Traffic Control Disregarded
7010					Left V1 making left out of lot went wrong way down broad st hit v2 going EB (17) Traffic Control Disregarded (13) Passing or Lane Usage Improper
					Add accidents found: Pitkin St + Union St Corridors

**Location:** Pitkin St

**Town:** City of Rochester

13-Jan-09

County: Monroe

			Milepost: E. Main St			To: Chestnut/Monro				
Time of Day	No. of Accidents	% of Total	Direction	# Veh	% of Total	Direction	# Veh	% of Total		
6 AM - 10 AM	2	17	North:	0	0	NorthEast:	0	0		
10:00 AM - 4 PM	5	42	South:	10	43	NorthWest:	0	0		
4 PM - 7 PM	1	8.3	East:	3	13	SouthEast:	0	0		
7 PM - 12 MID	3	25	West:	9	39	SouthWest:	1	4.3		
12 MID - 6 AM	1	8.3	Unknown:	0	0					
Unspecified	0	0				Total	23			
Total	12									
Weather	No. of Accidents		Acc. Type	# Veh	% of Total	Acc. Type	# Veh	% of Total		
Clear:	5	42	Sideswipe:	0	0	Bicycle:	0	0		
Cloudy:	3	25	Rear End:	5	42	Right Turn:	1	8.3		
Fog:	0	0	Right Angle:	3	25	Driveway:	0	0		
Rain:	2	17	Left Turn:	0	0	Backing:	0	0		
Sleet:	0	0	Pedestrian:	1	8.3	Overtaking:	1	8.3		
Snow:	2	17	Fixed Object:	0	0	Unknown:	1	8.3		
Unknown:	0	0	Head on:	0	0					
Total	12					Total	12			
Pavement	No. of Accidents		Accident Severity		No. of Accidents		% of Total			
Dry:	7	58	Fatal:		0		0			
Muddy:	0	0	Non-Fatal Injury:		1		8.3			
Other:	0	0	Property damage only:		11		92			
Slush:	0	0	Non-reportable:		0		0			
Snow/Ice:	2	17		Total	12					
Wet:	3	25								
Unknown:	0	0	Type of Vehicle		No. of Accidents		% of Total			
Total	12		Passenger Cars:		23					
			Commercial Vehicles:							
				Total						
Time of Year	No. of Accidents		Light Condition		No. of Accidents		% of Total			
Winter (Dec-Feb)	4	33	Dark Road-Lighted:		5		42			
Spring (Mar-May)	4	33	Dark Road-Unlighted:		0		0			
Summer (Jun-Aug)	2	17	Dawn:		0		0			
Fall (Sep-Nov)	2	17	Daylight:		7		58			
			Dusk:		0		0			
Total	12		Unknown:		0		0			
				Total	12					



# Department of Transportation

Monroe County, New York

**Maggie Brooks**  
*County Executive*

**Terrence J. Rice, P.E.**  
*Director*

March 3, 2009

Mr. James R. McIntosh  
City Engineer  
City Hall  
30 Church Street  
Rochester, NY 14614

RE: INNER LOOP STUDY, PHASE II, E. MAIN ST. TO I-490 - GO/NO GO ANALYSIS

Jim  
Dear Mr. McIntosh:

We have completed our review of the draft Go/No Go analysis report dated January 13, 2009 for the above referenced project and we offer the following comments.

### General Comments

1. We agree with the report's conclusions that further study of the Inner Loop between Monroe Avenue/Chestnut Street and East Avenue, of the Inner Loop at Main Street, and of the proposed new westbound I-490 off ramp to the Inner Loop is appropriate.
2. The two at-grade alternatives shown in the report for the Inner Loop at Main Street do not appear to be practical due to the number of lanes shown. The excess width may not create a suitable pedestrian environment, and the accident analysis indicates an existing problem with sideswipe/overtaking accidents, which would be aggravated if more lanes were added. Therefore, we believe that other options should be explored beyond those identified in the report.
3. We believe that the proposed I-490 westbound off-ramp to the Inner Loop is a desirable alternative to improve access for I-490 westbound traffic. The report should include sketches of the proposed layout, similar to those contained in the January 22, 2009 meeting handout.
4. NYSDOT guidelines stipulate that roundabouts should be considered first before signalization. Have roundabouts been considered for the Inner Loop intersections with Main Street/University Avenue, Chestnut Street/Monroe Avenue, Broad Street, and East Avenue?
5. Although the grade separated eastern portion of the Inner Loop does not have the level of volumes as the remainder of the Inner Loop, it does not follow that this section of road has no purpose, as was stated on Page 5. It serves as a connecting route between the east side of downtown and I-490 to/from the west. However, the lack of a direct connection from I-490 westbound limits the usefulness of this section of road, and we would agree that that this section of the Inner Loop would not be likely to attract more traffic if it was raised to grade without any modifications to the access from I-490 westbound.
6. The options are identified as #1, #2, and #4. They should either be renumbered or an explanation should be provided concerning what option #3 was and why it is not further discussed in the report.

## **INNER LOOP STUDY, PHASE II, E. MAIN STREET TO I-490 - GO/NO GO ANALYSIS**

March 3, 2009

Page 2

### **Technical Comments**

7. Pg 6 – The report should explain how the traffic volumes were adjusted to account for the road closures associated with the I-490 Western Gateway.
8. Pg 9 – In the top figure, the intersection of Chestnut/Monroe/Raised Inner Loop should show two (2) receiving eastbound lanes, and the eastbound approach should consist of a left, thru, and shared thru/right lane, so that eastbound through vehicles do not get trapped.
9. Pg 9 – In the bottom figure, the East Ave/Inner Loop intersection does not show left turn lanes on East Avenue. We anticipate that dedicated left turn lanes will be needed to handle the projected traffic volumes and to provide adequate line of sight for opposing left turning vehicles.
10. Pg 9 – The bottom figure shows Broad Street intersecting the Inner Loop as a six lane roadway. The volumes do not justify such a cross section, and its narrowing is being studied as part of the City's Broad/Court/Chestnut project. Additionally, consideration should be given to extending Broad Street to the east of Union Street.
11. Pg 12 – The Level of Service table should include information for each approach and lane group.
12. Pg 14 – The existing average speeds shown in the table would be too low for a grade separated facility. The report should clarify that the existing network included the mainline, the frontage roads, and some adjacent signalized intersections.
13. Pg 12 & Attachment B – Some discrepancies were found between the LOS tables and the Synchro files, specifically in the 2035 PM scenario.
14. Attachment C – The queue analysis table attached includes several table cells containing a “?”. Please add the missing information.
15. Attachment D – The “Inner Loop Accident Data” section appears to include linear sections for both the Inner Loop frontage roads and the Inner Loop main line. The main line and frontage roads are very different in character and should be discussed separately. Given their different character, comparing both to the same statewide accident rates for “principal arterial expressways” does not seem appropriate.
16. Please confirm that only reportable accidents were used to calculate the accident rates. Although the report states that this was the case, it seems unusual that so many intersections would substantially exceed the average accident rates.
17. Attachment D – We recommend separating the accident plot diagrams into one diagram for each year so that the accident trends over time for a given location can be visually recognized.
18. Attachment D – For the East Main Street corridor discussion, please add that a portion of Main Street east of Union St was studied by MCDOT as part of a PIL in July 2006, resulting in traffic signal timing changes that improved the progression on East Main Street.
19. Attachment D – The report should include a discussion about any notable accident patterns that were identified in the collision diagrams, such as the northbound/eastbound right angle accident patterns shown at both Monroe Avenue/Union Street and East Avenue/Union Street.

## INNER LOOP STUDY, PHASE II, E. MAIN STREET TO I-490 - GO/NO GO ANALYSIS

March 3, 2009

Page 3


20. Attachment D – The sections of I-490 shown in diagrams 7, 8, and 9 were under construction during some of the years studied in the accident analysis. This should be clearly identified and discussed in the report.
21. Chestnut/Woodbury, Monroe/Inner Loop, and Broad/Inner Loop – The analysis should use a 100 second cycle length in the AM, show each signal as coordinated, and include all pedestrian timing requirements to ensure that there is enough split time being provided for pedestrians to cross the street.
22. Union/University – For safety reasons, the proposed southbound dual lefts on Union Street at University Avenue should be modeled as a protected only left turn.
23. Main/University/Pitkin – The westbound left turn lane on Main Street at Pitkin Street/University Avenue should be included in all models.

### Grammatical Comments

24. Pg 2, # 4. – Replace “turning movements” with “individual movements” to better describe the Level of Service results.
25. Attachment A ~ Please correct the many grammatical errors in Inner Loop Study Area Analysis Memo. Also, the Inner Loop Volume Comparison Locations (2014) map should read “Raised” not “Raise”.
26. Attachment A – For better clarity, we suggest saying “due to random variations within the model” instead of “the result of running the model twice”.

We look forward to reviewing a revised report with the above comments addressed. If you have any questions or require additional information, please contact me at 753-7755.

Sincerely,

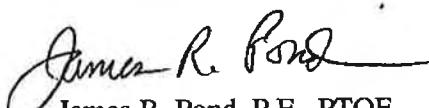

James R. Pond, P.E., PTOE  
Associate Traffic Engineer

JRP:mlp

xc:      T. Rice  
          S. Leathersich  
          M. Partelow  
          D. Goehring, NYSDOT  
          J. Hoffman, Stantec



## MEMORANDUM

DEPARTMENT OF TRANSPORTATION

TO: Marvin Kleinberg  
FROM: David Goehring, Regional Traffic Engineer  
SUBJECT: **Comments on Raising the Eastern Portion of the Inner Loop**

DATE: February 24, 2009

We have reviewed the January 13, 2009 memo and supporting documents for Raising the Eastern Portion of the Inner Loop from William Holtoff of Stantec. For the Go/No Go decision on whether to proceed with a more detailed study, we have the following comments.

In regards to the recommendations and conclusions made, we agree with the Go decision for the Inner Loop between Chestnut/Monroe and East Avenue, and with the Go decision for the Westbound I-490 off ramp to the Inner Loop. However we recommend a No Go decision for the Inner Loop at Main Street.

Our No Go decision for a raised Inner Loop at Main Street is based on the following.

1. As stated in the analysis, vehicle storage in the area of University Avenue/South Union Street/Main Street is an issue now and will remain so into the future for the existing Inner Loop or raised Inner Loop. Since this is a problem now, this project does not justify the need to add more points of conflict, reduce the storage lengths, and add more traffic to an area that already has issues. This option will increase delays and potentially decrease safety. We should not be adding lanes and introducing complex traffic signal phasing to address new problems.
2. For some approaches lane utilization is an issue that will significantly increase queue lengths which presents some safety concerns. Queue lengths are likely to extend into adjacent intersections or extend beyond storage lengths. This is apparent through a review of SimTraffic and the Inner Loop approaches to Main Street.
3. We have concerns regarding a highway with relatively high speeds entering an area that is congested with long queue lengths. Since sight distance approaching Main Street from the Inner Loop may be restricted, this also may become a safety issue with increases in high speed rear end accidents.
4. With the introduction of more intersections and lanes, it will be significantly more difficult for pedestrians to traverse through this area.

In general we have the following comments regarding the supporting documents.

1. In the areas of the Inner Loop at grade, what restrictions on access are proposed? Is a raised median proposed or will some sections be right-of-way without access?
2. At a traffic signal where there are three or more through lanes opposing a left turn movement, the left turn movement is generally controlled by a protected only left turn arrow.
3. In the SYNCHRO analysis, the lost time adjustment should be zero, the percentage of heavy vehicles is much greater than the default value of 2 percent and as stated above the lane utilization will differ on certain approaches to an intersection. Each of these inputs will impact the capacity of an intersection.
4. We agree with the consideration of a roundabout alternative at each intersection.

## **Memo**

DRAFT



**Stantec**

---

To: John Thomas                          From: Paula Benway  
File: Inner Loop 192500170              Date: Rochester, New York  
    April 24, 2009

---

A draft Go/No Go Analysis for Raising the Eastern Portion of the Inner Loop was prepared and documented in a memo to the City of Rochester dated January 13, 2009. This memo was shared and reviewed by the technical advisory committee. Formal comments were received as follows:

- Monroe County Department of Transportation, March 3, 2009
- New York State Department of Transportation, February 24, 2009

This memo serves to address the comments received. A copy of the correspondence from MCDOT and NYSDOT are attached.

### ***Monroe County DOT***

MCDOT Comment 1: We agree with the report's conclusions that further study of the Inner Loop between Monroe Avenue/Chestnut Street and East Avenue, of the Inner Loop at Main Street, and of the proposed new westbound I-490 off ramp to the Inner Loop is appropriate.

*Response: no response necessary.*

MCDOT Comment 2: The two at-grade alternatives shown in the report for the Inner Loop at Main Street do not appear to be practical due to the number of lanes shown. The excess width may not create a suitable pedestrian environment, and the accident analysis indicates an existing problem with sideswipe/overtaking accidents, which would be aggravated if more lanes were added. Therefore, we believe that other options should be explored beyond those identified in the report.

*Response: Initial attempt was to determine if an option to bring the Inner Loop up to grade at Main Street was possible; as documented. Additional alternatives at Main Street will be developed and evaluated to minimize some of the concerns noted as part of the next phase of the project.*

MCDOT Comment 3: We believe that the proposed I-490 westbound off-ramp to the Inner Loop is a desirable alternative to improve access for I-490 westbound traffic. The report should include sketches of the proposed layout, similar to those contained in the January 22, 2009 meeting handout.

*Response: A concept sketch will be included.*

MCDOT Comment 4: NYSDOT guidelines stipulate that roundabouts should be considered first before signalization. Have roundabouts been considered for the Inner Loop intersections with Main Street/ University Avenue, Chestnut Street/Monroe Avenue, Broad Street, and East Avenue?

**One Team. Infinite Solutions.**

## **Stantec**

April 24, 2009  
Response to Agency Comments  
Page 2 of 6

*Response: Alternative refinement, including consideration and modeling of roundabouts at each of the intersections is part of the next phase of the project.*

MCDOT Comment 5: Although the grade separated eastern portion of the Inner Loop does not have the level of volumes as the remainder of the Inner Loop, it does not follow that this section of road has no purpose, as was stated on Page 5. It serves as a connecting route between the east side of downtown and I-490 to/from the west. However, the lack of a direct connection from I-490 westbound limits the usefulness of this section of road, and we would agree that this section of the Inner Loop would not be likely to attract more traffic if it was raised to grade without any modifications to the access from I-490 westbound.

*Response: so noted.*

MCDOT Comment 6: The options are identified as #1, #2, and #4. They should either be renumbered or an explanation should be provided concerning what option #3 was and why it is not further discussed in the report.

*Response: so noted.*

MCDOT Comment 7: Pg 6- the report should explain how the traffic volumes were adjusted to account for the road closures associated with the I-490 Western Gateway.

*Response: The text has been edited to clarify how the volumes were adjusted.*

MCDOT Comment 8: Pg 9 – In the top figure, the intersection of Chestnut/Monroe/ Raised Inner Loop should show two (2) receiving eastbound lanes, and the eastbound approach should consist of a left, through, and shared thru/right lane, so that eastbound through vehicles do not get trapped.

*Response: The synchro analysis was adjusted accordingly.*

MCDOT Comment 9: Pg 9 – In the bottom figure, the East Avenue/Inner Loop intersection does not show left turn lanes on East Avenue. We anticipate that dedicated left turn lanes will be needed to handle the projected traffic volumes and to provide adequate line of sight for opposing left turning vehicles.

*Response: Preliminary analysis indicates this intersection to operate at good levels today and in the future. Due to the relatively tight ROW with existing buildings on the southeast and northeast corners, the feasibility of opposing left turn lanes without impacts to adjacent properties is low. This will be considered in the next phase of the project as other alternatives or refinements will be further evaluated.*

MCDOT Comment 10: Pg 9 – The bottom figure shows Broad Street intersecting the Inner Loop as a six lane roadway. The volumes do not justify such a cross section, and its narrowing is being studied as part of the City's Broad/Court/Chestnut project. Additionally, consideration should be given to extending Broad Street to the east of Union Street.

*Response: Updated information on the Broad/Court/Chestnut project is appreciated. Subsequent analysis of this intersection will show the reduced number of lanes on the Broad Street approach.*

## **Stantec**

April 24, 2009  
Response to Agency Comments  
Page 3 of 6

MCDOT Comment 11: Pg 12 – The Level of Service table should include information for each approach and lane group.

*Response: A detailed level of service table by approach/lane group is provided in Attachment B.*

MCDOT Comment 12: Pg 14 – The existing average speeds shown in the table would be too low for a grade separated facility. The report should clarify that the existing network included the mainline, the frontage roads, and some adjacent signalized intersections.

*Response: Correct, the average speeds shown on the table are inclusive of all roadways and intersections within the study area; clarification will be provided.*

MCDOT Comment 13: Pg 12 & Attachment B – Some discrepancies were found between the LOS tables and the Synchro files, specifically in the 2035 PM scenario.

*Response: The level of service tables has been updated.*

MCDOT Comment 14: Attachment C – The queue analysis table attached includes several table cells containing a "?". Please add the missing information.

*Response: The table has been updated.*

MCDOT Comment 15: Attachment D – The “Inner Loop Accident Data” section appears to include linear sections for both the Inner Loop frontage roads and the Inner Loop main line. The main line and frontage roads are very different in character and should be discussed separately. Given their different character, comparing both to the same statewide accident rates for “principal arterial expressways” does not seem appropriate.

*Response: The accidents reported in this category occurred on the Inner Loop mainline only. Accidents on the frontage roads were not included in the linear accident rate calculation.*

MCDOT Comment 16: Please confirm that only reportable accidents were used to calculate the accident rates. Although the report states that this was the case, it seems unusual that so many intersections would substantially exceed the average accident rates.

*Response: Only reportable accidents were used to calculate the accident rates.*

MCDOT Comment 17: Attachment D – We recommend separating the accident plot diagrams into one diagram for each year so that the accident trends over time for a given location can be visually recognized.

*Response: With such a large study area, providing collision diagrams per year would triple the number of diagrams needed. Instead, a summary report from the database that shows how many accidents occurred per location per year is provided. This may assist in determining an increase or decrease in crashes from year to year.*

MCDOT Comment 18: Attachment D – For the East Main Street corridor discussion, please add that a portion of Main Street east of Union St was studied by MCDOT as part of a PIL in July 2006, resulting in traffic signal timing changes that improved the progression on East Main Street.

*Response: Update on the PIL investigation result has been added.*

## **Stantec**

April 24, 2009  
Response to Agency Comments  
Page 4 of 6

MCDOT Comment 19: Attachment D – The report should include a discussion about any notable accident patterns that were identified in the collision diagrams, such as the northbound/eastbound right angle accident patterns shown on both Monroe Avenue/Union Street and East Avenue/Union Street.

*Response: A discussion of the accident patterns at these intersections is on page 3 and 4.*

MCDOT Comment 20: Attachment D – The sections of I-490 shown in diagrams 7, 8, and 9 were under construction during some of the years studied in the accident analysis. This should be clearly identified and discussed in the report.

*Response: This clarification has been added to the report.*

MCDOT Comment 21: Chestnut/Woodbury, Monroe/Inner Loop, and Broad/Inner Loop – The analysis should use a 100 second cycle length in the AM, Show each signal as coordinated, and include all pedestrian timing requirements to ensure that there is enough split time being provided for pedestrians to cross the street.

*Response: The analysis has been updated.*

MCDOT Comment 22: Union/University – For safety reasons, the proposed southbound dual lefts on Union Street at University Avenue should be modeled as a protected only left turn.

*Response: The analysis has been updated.*

MCDOT Comment 23: Main/University/Pitkin – the westbound left turn lane on Main Street at Pitkin Street/University Avenue should be included in all models.

*Response: The analysis has been updated.*

MCDOT Comment 24: Pg 2, #4 – Replace “turning movements” with “individual movements” to better describe the Level of Service results.

*Response: so noted*

MCDOT Comment 25: Attachment A – Please correct the many grammatical errors in Inner Loop Study Area Analysis Memo. Also, the Inner Loop Volume Comparison Locations (2014) map should read “Raised” not “Raise”.

*Response: so noted*

MCDOT Comment 26: Attachment A – for better clarity, we suggest saying “due to random variations within the model” instead of “the result of running the model twice”.

*Response: so noted*

## **New York State DOT**

NYSDOT Comment 1: As stated in the analysis, vehicle storage in the area of University Avenue/South Union Street/Main Street is an issue now and will remain so into the future for the existing Inner Loop or raised Inner Loop. Since this is a problem now, this project does not justify the need to add more points of conflict reduce the storage lengths, and add more traffic to an area that already has issues. This option will increase delays and potentially decrease safety. We should not be adding lanes and introducing a complex traffic signal phasing to address new problems.

*Response: no response necessary.*

NYSDOT Comment 2: For some approaches lane utilization is an issue that will significantly increase queue lengths which presents some safety concerns. Queue lengths are likely to extend into adjacent intersections or extend beyond storage lengths. This is apparent through a review of SimTraffic and the Inner Loop approaches to Main Street.

*Response: So noted, efforts have been made to adjust lane utilization factors as much as possible to resemble actual operations.*

NYSDOT Comment 3: We have concerns regarding a highway with relatively high speeds entering an area that is congested with long queue lengths. Since sight distance approaching Main Street from the Inner Loop may be restricted, this also may become a safety issue with increases in high speed rear end accidents.

*Response: Both issues noted would normally be identified and addressed in a later phase of the project. Future consideration will be given to these items.*

NYSDOT Comment 4: With the introduction of more intersections and lanes, it will be significantly more difficult for pedestrians to traverse through this area.

*Response: As the number of travel lanes increase the more difficult it can be for a pedestrian, however, as the project alternatives are refined the introduction of refuge islands where applicable or other pedestrian friendly amenities will be considered to minimize this concern.*

#### **New York State DOT – Supporting Documents**

NYSDOT Comment 1: In the areas of the Inner Loop at grade, what restrictions on access are proposed? Is a raised median proposed or will some sections be right-of-way without access.

*Response: At this point, no definitive recommendation has been made related to the level of access that will be provided along the Inner Loop at grade sections. This will be identified and discussed in later phases of this project.*

NYSDOT Comment 2: At a traffic signal where there are three or more through lanes opposing a left turn movement, the left turn movement is generally controlled by a protected only left turn arrow.

*Response: The analysis has been updated.*

NYSDOT Comment 3: In the SYNCHRO analysis, the lost time adjustment should be zero, the percentage of heavy vehicles is much greater than the default value of 2 percent and as stated above the lane utilization will differ on certain approaches to an intersection. Each of these inputs will impact the capacity of an intersection.

*Response: The analysis has been updated to reflect zero lost time. Actual heavy vehicles percentages obtained during the traffic counts have been used in the analysis.*

NYSDOT Comment 4: We agree with the consideration of a roundabout alternative at each intersection.

*Response: Roundabout feasibility and analysis will be performed in the next step of the project.*

**Stantec**

April 24, 2009  
Response to Agency Comments  
Page 6 of 6

**STANTEC CONSULTING SERVICES INC.**

Paula Benway  
Associate, Transportation  
Paula.Benway@stantec.com

Attachments: MCDOT, March 3, 2009  
NYSDOT, February 24, 2009

U:\192500170\Traffic\Go No Go Memo\Response to Comments.doc



# **APPENDIX G**

## **Traffic Analysis**



## **Appendix G – Traffic Analysis Contents**

**2008 Existing Conditions**

**2015 ETC Conditions**

**2035 No Build Conditions**

**2035 Preferred Alternative**


**2035 Alternative Development Memo**




# **Appendix G – Traffic Analysis Contents**

## **2008 Existing Conditions**


- 2008 Existing Traffic Volumes**
- 2008 Existing Capacity Analysis  
Printouts**
- Synchro Files (available upon request)**

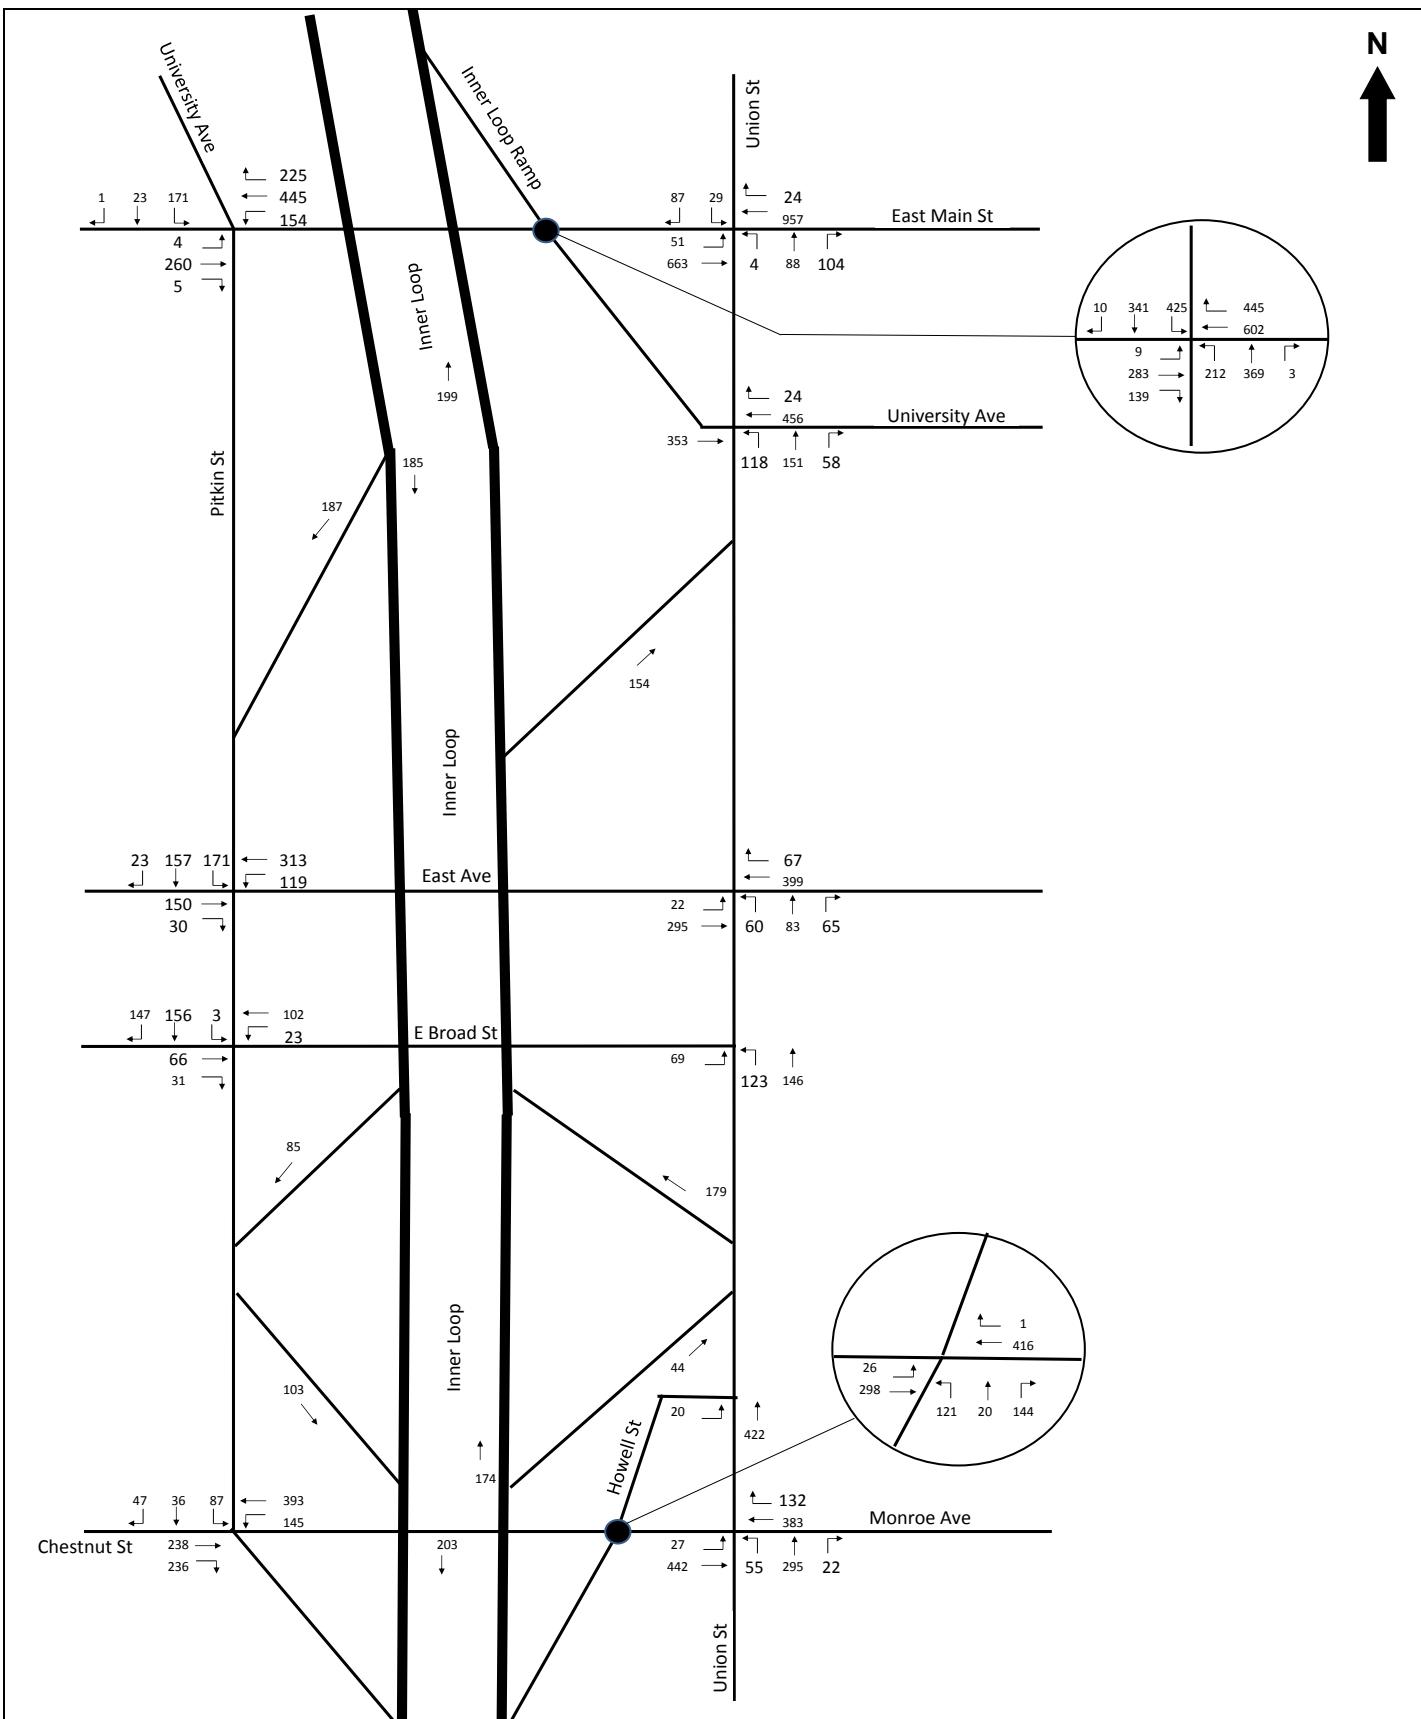

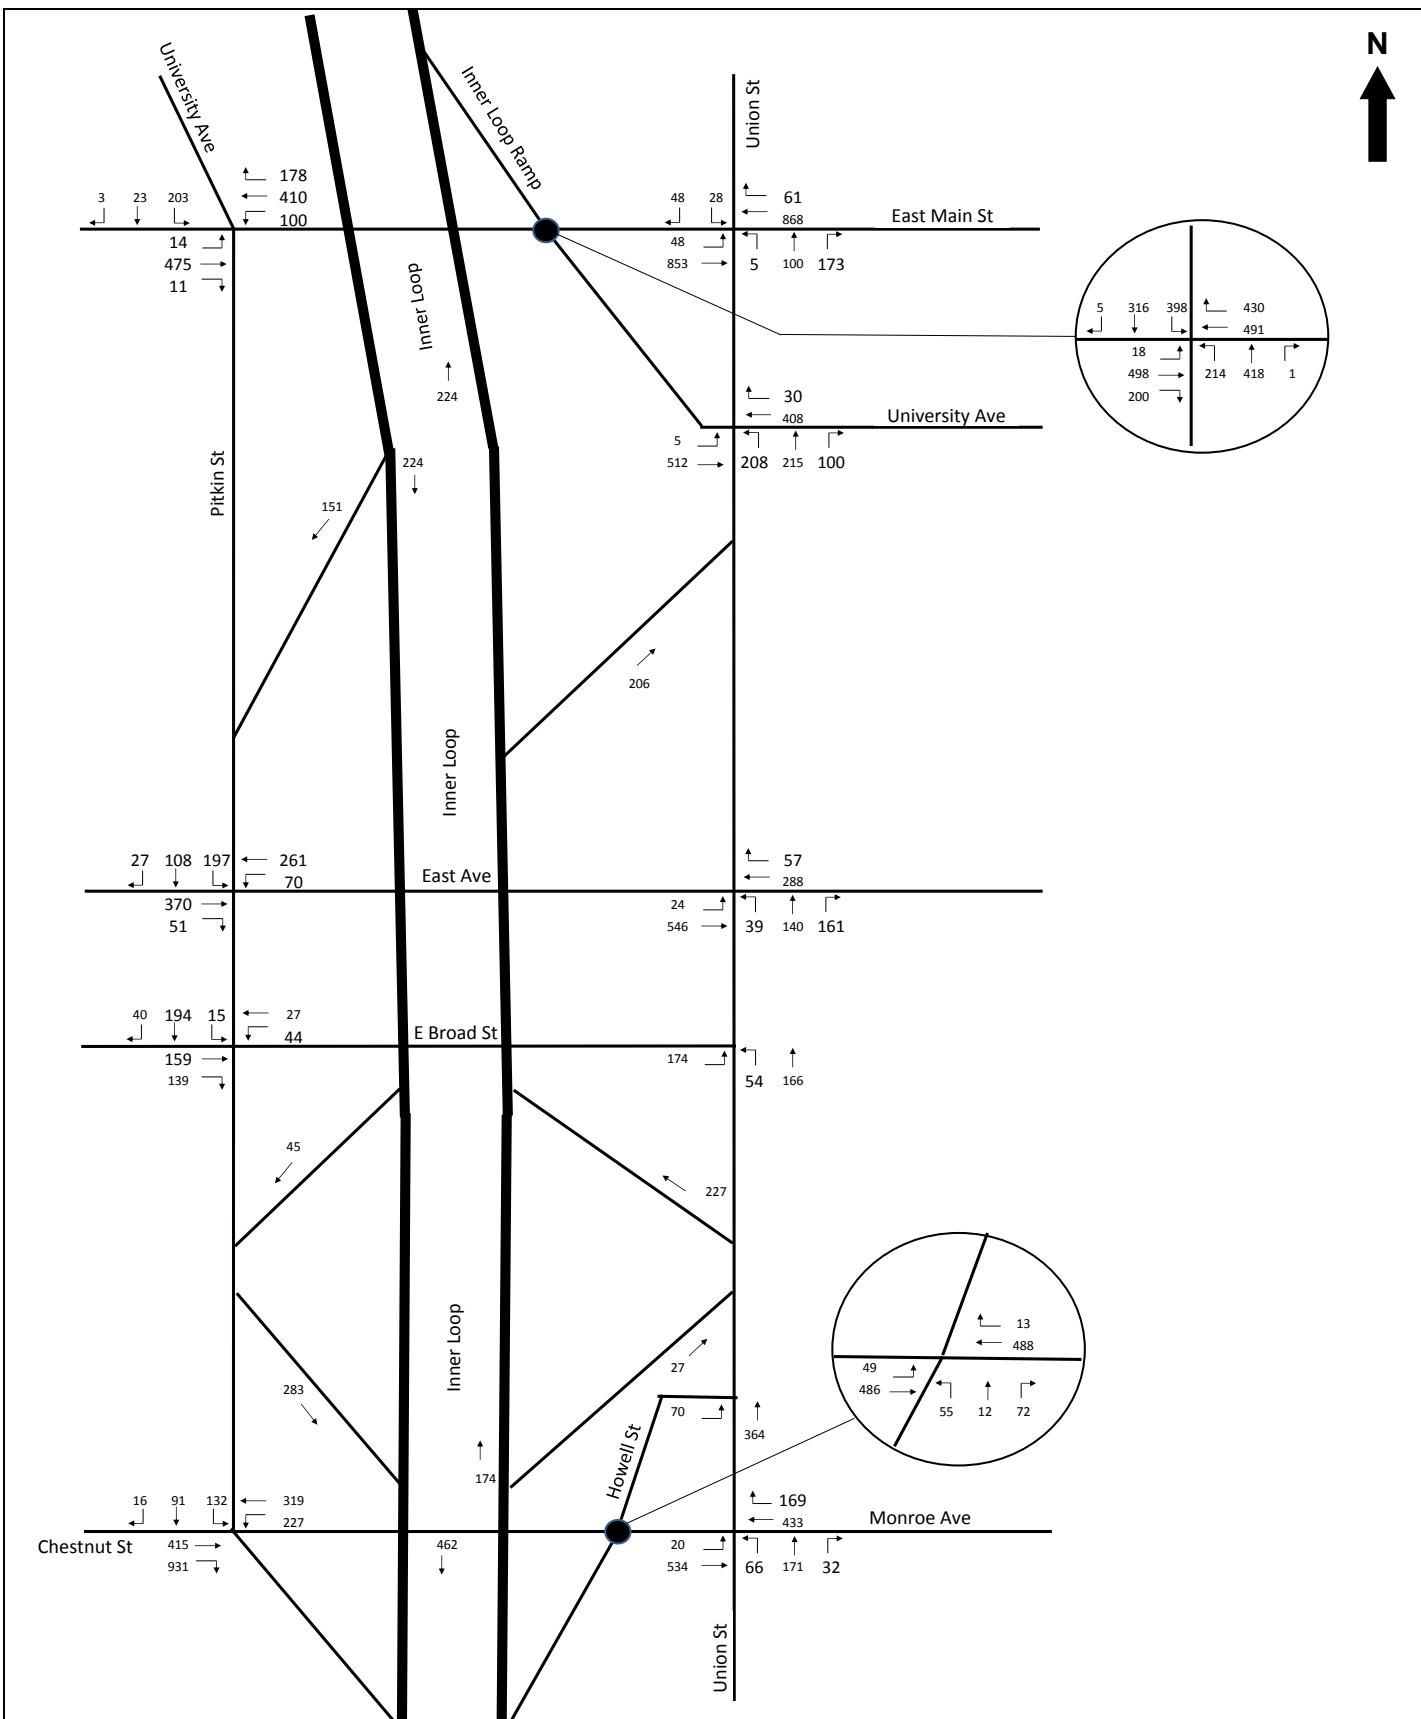


Lanes, Volumes, Timings  
2471: Monroe & IL EB

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	SEL	SET	SER	NWL	NWT	NWR
Lane Configurations												
Volume (vph)	121	20	144	0	0	0	26	298	0	0	416	1
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		200	0			0	0		0	0	50
Storage Lanes	0		1	0			0	0		1	0	1
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	0.95	0.95	1.00	1.00	1.00	1.00	0.95	0.95	1.00	1.00	0.95	0.95
Frt				0.850								
Flt Protected				0.959							0.996	
Satd. Flow (prot)	0	3266	1524	0	0	0	0	3457	0	0	3471	0
Flt Permitted				0.959							0.910	
Satd. Flow (perm)	0	3266	1524	0	0	0	0	3159	0	0	3471	0
Right Turn on Red				Yes			Yes			Yes		Yes
Satd. Flow (RTOR)				180								
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		768			258			177			418	
Travel Time (s)		17.5			5.9			4.0			9.5	
Peak Hour Factor	0.80	0.80	0.80	0.90	0.95	0.90	0.92	0.92	0.92	0.94	0.94	0.94
Heavy Vehicles (%)	6%	6%	6%	2%	2%	2%	4%	4%	4%	4%	4%	4%
Adj. Flow (vph)	151	25	180	0	0	0	28	324	0	0	443	1
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	176	180	0	0	0	0	352	0	0	444	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	1				1	2			2	
Detector Template	Left		Right				Left	Thru			Thru	
Leading Detector (ft)	20	50	20				20	100			100	
Trailing Detector (ft)	0	0	0				0	0			0	
Detector 1 Position(ft)	0	0	0				0	0			0	
Detector 1 Size(ft)	20	50	20				20	6			6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex				Cl+Ex	Cl+Ex			Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0				0.0	0.0			0.0	
Detector 1 Queue (s)	0.0	0.0	0.0				0.0	0.0			0.0	
Detector 1 Delay (s)	0.0	0.0	0.0				0.0	0.0			0.0	
Detector 2 Position(ft)								94			94	
Detector 2 Size(ft)								6			6	
Detector 2 Type							Cl+Ex			Cl+Ex		
Detector 2 Channel												
Detector 2 Extend (s)								0.0			0.0	
Turn Type	Split	NA	Perm				pm+pt	NA			NA	
Protected Phases	2	2					3	1 3			1	
Permitted Phases			2				1 3				1	



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	SEL	SET	SER	NWL	NWT	NWR
Detector Phase	2	2	2				3	13			1	
Switch Phase												
Minimum Initial (s)	6.0	6.0	6.0				3.0				3.0	
Minimum Split (s)	32.0	32.0	32.0				25.0				25.0	
Total Split (s)	32.0	32.0	32.0				25.0				28.0	
Total Split (%)	37.6%	37.6%	37.6%				29.4%				32.9%	
Maximum Green (s)	27.0	27.0	27.0				20.0				23.0	
Yellow Time (s)	4.0	4.0	4.0				4.0				4.0	
All-Red Time (s)	1.0	1.0	1.0				1.0				1.0	
Lost Time Adjust (s)		0.0	0.0								0.0	
Total Lost Time (s)		5.0	5.0								5.0	
Lead/Lag	Lag	Lag	Lag								Lead	
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0	3.0				3.0				3.0	
Recall Mode	Min	Min	Min				None				C-Max	
Walk Time (s)	7.0	7.0	7.0				5.0				5.0	
Flash Dont Walk (s)	18.0	18.0	18.0				15.0				15.0	
Pedestrian Calls (#/hr)	0	0	0				0				0	
Act Effct Green (s)		9.9	9.9				60.1				52.0	
Actuated g/C Ratio		0.12	0.12				0.71				0.61	
v/c Ratio		0.46	0.53				0.16				0.21	
Control Delay		38.6	11.8				3.1				8.2	
Queue Delay		0.0	0.0				0.3				0.0	
Total Delay		38.6	11.8				3.4				8.2	
LOS		D	B				A				A	
Approach Delay		25.0					3.4				8.2	
Approach LOS		C					A				A	

#### Intersection Summary

Area Type: Other

Cycle Length: 85

Actuated Cycle Length: 85

Offset: 73 (86%), Referenced to phase 1:NWSE, Start of Green

Natural Cycle: 85

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.53

Intersection Signal Delay: 11.9

Intersection LOS: B

Intersection Capacity Utilization 39.7%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2471: Monroe & IL EB



Lanes, Volumes, Timings  
2471: Monroe & IL EB

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	55	12	72	0	0	0	0	488	13	49	486	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	200		0	0		0	0		75	0		0
Storage Lanes	0		1	0		0	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.95	0.95	0.95	1.00
Frt				0.850				0.996				
Flt Protected				0.961								0.995
Satd. Flow (prot)	0	1808	1599	0	0	0	0	3525	0	0	3522	0
Flt Permitted		0.961										0.866
Satd. Flow (perm)	0	1808	1599	0	0	0	0	3525	0	0	3065	0
Right Turn on Red				Yes			Yes			Yes		Yes
Satd. Flow (RTOR)				90				3				
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		335			316			315			193	
Travel Time (s)		7.6			7.2			7.2			4.4	
Peak Hour Factor	0.80	0.80	0.80	0.95	0.95	0.95	0.95	0.95	0.95	0.90	0.90	0.90
Heavy Vehicles (%)	1%	1%	1%	2%	2%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	69	15	90	0	0	0	0	514	14	54	540	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	84	90	0	0	0	0	528	0	0	594	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	1					1		1	1	
Detector Template												
Leading Detector (ft)	50	50	50					50		50	50	
Trailing Detector (ft)	0	0	0					0		0	0	
Detector 1 Position(ft)	0	0	0					0		0	0	
Detector 1 Size(ft)	50	50	50					50		50	50	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex					Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0					0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0					0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0					0.0		0.0	0.0	
Turn Type	Split	NA	Perm					NA		pm+pt	NA	
Protected Phases	2	2						1		3	1 3	
Permitted Phases			2					1		1 3		
Detector Phase	2	2	2					1		3	1 3	
Switch Phase												
Minimum Initial (s)	6.0	6.0	6.0					7.0		6.0		
Minimum Split (s)	32.0	32.0	32.0					27.0		11.0		
Total Split (s)	33.0	33.0	33.0					50.0		17.0		



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (%)	33.0%	33.0%	33.0%					50.0%		17.0%		
Maximum Green (s)	28.0	28.0	28.0					45.0		12.0		
Yellow Time (s)	4.0	4.0	4.0					4.0		4.0		
All-Red Time (s)	1.0	1.0	1.0					1.0		1.0		
Lost Time Adjust (s)		0.0	0.0					0.0				
Total Lost Time (s)		5.0	5.0					5.0				
Lead/Lag	Lag	Lag	Lag					Lead				
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0	3.0					2.0		3.0		
Recall Mode	Min	Min	Min					C-Max		None		
Walk Time (s)	7.0	7.0	7.0					7.0				
Flash Dont Walk (s)	18.0	18.0	18.0					15.0				
Pedestrian Calls (#/hr)	0	0	0					0				
Act Effct Green (s)	11.3	11.3						61.7		73.7		
Actuated g/C Ratio	0.11	0.11						0.62		0.74		
v/c Ratio	0.41	0.35						0.24		0.26		
Control Delay	46.0	12.1						8.4		0.8		
Queue Delay	0.0	0.0						0.0		0.2		
Total Delay	46.0	12.1						8.4		1.0		
LOS	D	B						A		A		
Approach Delay	28.4							8.4		1.0		
Approach LOS	C							A		A		

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 65 (65%), Referenced to phase 1:NBSB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.44

Intersection Signal Delay: 7.7


Intersection LOS: A

Intersection Capacity Utilization 46.3%

ICU Level of Service A

Analysis Period (min) 15


Splits and Phases: 2471: Monroe & IL EB

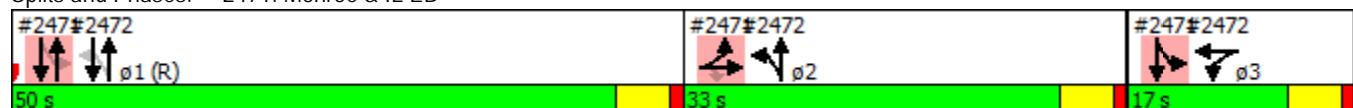

Lanes, Volumes, Timings  
571: Monroe/Chestnut & Pitkin

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	SEL	SET	SER	NWL	NWT	NWR	
Lane Configurations													
Volume (vph)	0	0	0	87	36	47	0	238	236	145	393	0	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	
Lane Util. Factor	1.00	1.00	1.00	0.91	0.91	0.91	1.00	0.95	0.88	1.00	1.00	1.00	
Fr <sub>t</sub>						0.958				0.850			
Flt Protected						0.975				0.950			
Satd. Flow (prot)	0	0	0	0	4659	0	0	3505	2760	1736	1827	0	
Flt Permitted						0.975				0.595			
Satd. Flow (perm)	0	0	0	0	4659	0	0	3505	2760	1087	1827	0	
Right Turn on Red				Yes			Yes			Yes			Yes
Satd. Flow (RTOR)						59				251			
Link Speed (mph)		30				30			30		30		
Link Distance (ft)		494				239			635		177		
Travel Time (s)		11.2				5.4			14.4		4.0		
Peak Hour Factor	0.90	0.90	0.90	0.80	0.80	0.80	0.94	0.94	0.94	0.88	0.88	0.88	
Heavy Vehicles (%)	2%	2%	2%	4%	4%	4%	3%	3%	3%	4%	4%	4%	
Adj. Flow (vph)	0	0	0	109	45	59	0	253	251	165	447	0	
Shared Lane Traffic (%)													
Lane Group Flow (vph)	0	0	0	0	213	0	0	253	251	165	447	0	
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No	
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right	
Median Width(ft)		0				0			12		12		
Link Offset(ft)		0				0			0		0		
Crosswalk Width(ft)		16				16			16		16		
Two way Left Turn Lane													
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15		9	15		9	15		25	15		9	
Number of Detectors				1	2			2	1	1	2		
Detector Template				Left	Thru			Thru	Right	Left	Thru		
Leading Detector (ft)				20	100			100	20	20	100		
Trailing Detector (ft)				0	0			0	0	0	0		
Detector 1 Position(ft)				0	0			0	0	0	0		
Detector 1 Size(ft)				20	6			6	20	20	6		
Detector 1 Type				Cl+Ex	Cl+Ex			Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		
Detector 1 Channel													
Detector 1 Extend (s)				0.0	0.0			0.0	0.0	0.0	0.0		
Detector 1 Queue (s)				0.0	0.0			0.0	0.0	0.0	0.0		
Detector 1 Delay (s)				0.0	0.0			0.0	0.0	0.0	0.0		
Detector 2 Position(ft)					94			94			94		
Detector 2 Size(ft)					6			6			6		
Detector 2 Type					Cl+Ex			Cl+Ex			Cl+Ex		
Detector 2 Channel													
Detector 2 Extend (s)					0.0			0.0			0.0		
Turn Type				Split	NA			NA	Free	pm+pt	NA		
Protected Phases				3	3			1		2	1 2		
Permitted Phases								Free	1 2				
Detector Phase				3	3			1		2	1 2		
Switch Phase													
Minimum Initial (s)				3.0	3.0			3.0		3.0	3.0		



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	SEL	SET	SER	NWL	NWT	NWR
Minimum Split (s)				25.0	25.0			25.0		25.0		
Total Split (s)				25.0	25.0			25.0		25.0		
Total Split (%)				33.3%	33.3%			33.3%		33.3%		
Maximum Green (s)				20.0	20.0			20.0		20.0		
Yellow Time (s)				3.0	3.0			3.0		3.0		
All-Red Time (s)				2.0	2.0			2.0		2.0		
Lost Time Adjust (s)				0.0				0.0		0.0		
Total Lost Time (s)					5.0				5.0		5.0	
Lead/Lag									Lead		Lag	
Lead-Lag Optimize?												
Vehicle Extension (s)				3.0	3.0			3.0		3.0		
Recall Mode				None	None			C-Max		Max		
Walk Time (s)				5.0	5.0			5.0		5.0		
Flash Dont Walk (s)				15.0	15.0			15.0		15.0		
Pedestrian Calls (#/hr)				0	0			0		0		
Act Effect Green (s)				7.9				32.1	75.0	52.1	57.1	
Actuated g/C Ratio				0.11				0.43	1.00	0.69	0.76	
v/c Ratio				0.39				0.17	0.09	0.18	0.32	
Control Delay				24.3				14.0	0.1	3.5	3.7	
Queue Delay				0.0				0.0	0.0	0.9	7.3	
Total Delay				24.3				14.0	0.1	4.3	11.0	
LOS				C				B	A	A	B	
Approach Delay				24.3				7.0			9.2	
Approach LOS				C				A			A	

#### Intersection Summary

Area Type: Other

Cycle Length: 75

Actuated Cycle Length: 75

Offset: 65 (87%), Referenced to phase 1:NWSE, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.39

Intersection Signal Delay: 10.8

Intersection LOS: B

Intersection Capacity Utilization 33.8%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 571: Monroe/Chestnut & Pitkin



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	0	0	0	132	91	16	227	319	0	0	415	931
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	0.91	0.91	0.91	0.95	0.95	1.00	1.00	0.95	0.88
Fr <sub>t</sub>						0.990						0.850
Flt Protected						0.973			0.980			
Satd. Flow (prot)	0	0	0	0	4899	0	0	3468	0	0	3539	2787
Flt Permitted						0.973			0.648			
Satd. Flow (perm)	0	0	0	0	4899	0	0	2293	0	0	3539	2787
Right Turn on Red				Yes			Yes			Yes		Yes
Satd. Flow (RTOR)						9						1023
Link Speed (mph)		30				30			30			30
Link Distance (ft)		410				1027			193			627
Travel Time (s)		9.3				23.3			4.4			14.3
Peak Hour Factor	0.95	0.95	0.95	0.92	0.92	0.92	0.94	0.94	0.94	0.91	0.91	0.91
Adj. Flow (vph)	0	0	0	143	99	17	241	339	0	0	456	1023
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	0	0	259	0	0	580	0	0	456	1023
Enter Blocked Intersection	No	No	No	No	Yes	No	Yes	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)	0				0			12			12	
Link Offset(ft)	0				0			0			0	
Crosswalk Width(ft)	16				16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		25
Number of Detectors					1	1		1	1		1	1
Detector Template												
Leading Detector (ft)					50	50		50	50		50	50
Trailing Detector (ft)					0	0		0	0		0	0
Detector 1 Position(ft)					0	0		0	0		0	0
Detector 1 Size(ft)					50	50		50	50		50	50
Detector 1 Type					Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)					0.0	0.0		0.0	0.0		0.0	0.0
Detector 1 Queue (s)					0.0	0.0		0.0	0.0		0.0	0.0
Detector 1 Delay (s)					0.0	0.0		0.0	0.0		0.0	0.0
Turn Type					Split	NA		pm+pt	NA		NA	Free
Protected Phases					3	3		2	12		1	
Permitted Phases								12				Free
Detector Phase					3	3		2	12		1	
Switch Phase												
Minimum Initial (s)					6.0	6.0		6.0			7.0	
Minimum Split (s)					11.0	11.0		32.0			27.0	
Total Split (s)					17.0	17.0		33.0			50.0	
Total Split (%)					17.0%	17.0%		33.0%			50.0%	
Maximum Green (s)					12.0	12.0		28.0			45.0	
Yellow Time (s)					4.0	4.0		4.0			4.0	
All-Red Time (s)					1.0	1.0		1.0			1.0	



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lost Time Adjust (s)					0.0						0.0	
Total Lost Time (s)					5.0						5.0	
Lead/Lag							Lag				Lead	
Lead-Lag Optimize?												
Vehicle Extension (s)				3.0	3.0	3.0					2.0	
Recall Mode				None	None		Min				C-Max	
Walk Time (s)							7.0				7.0	
Flash Dont Walk (s)							18.0				15.0	
Pedestrian Calls (#/hr)							0				0	
Act Effct Green (s)					12.0		73.0			61.7	100.0	
Actuated g/C Ratio					0.12		0.73			0.62	1.00	
v/c Ratio					0.44		0.32			0.21	0.37	
Control Delay					39.4		2.1			6.9	0.3	
Queue Delay					0.0		0.0			0.0	0.0	
Total Delay					39.4		2.1			6.9	0.3	
LOS					D		A			A	A	
Approach Delay					39.4		2.1			2.4		
Approach LOS					D		A			A		

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 65 (65%), Referenced to phase 1:NBSB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.44

Intersection Signal Delay: 6.4


Intersection LOS: A

Intersection Capacity Utilization 46.7%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2472: Monroe/Chestnut & Pitkin

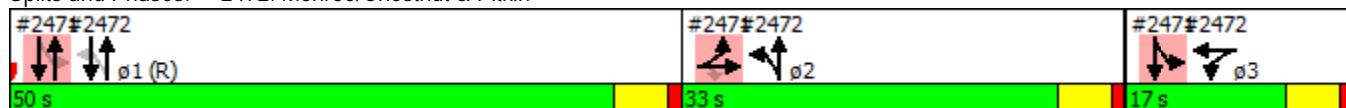

Lanes, Volumes, Timings  
246: Union & Monroe

1/7/2014

Lane Group	NBL	NBT	NBR	SBL	SBT	SBR	SEL	SET	SER	NWL	NWT	NWR
Lane Configurations												
Volume (vph)	55	295	22	0	0	0	27	442	0	0	383	132
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	250		250	0			0	0		0	0	50
Storage Lanes	1		0	0			0	1		0	0	1
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Frt		0.990										0.850
Flt Protected	0.950						0.950					
Satd. Flow (prot)	1752	3470	0	0	0	0	1719	1810	0	0	1827	1553
Flt Permitted	0.950						0.473					
Satd. Flow (perm)	1752	3470	0	0	0	0	856	1810	0	0	1827	1553
Right Turn on Red			Yes				Yes			Yes		Yes
Satd. Flow (RTOR)		9										113
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		500			568			202			736	
Travel Time (s)		11.4			12.9			4.6			16.7	
Peak Hour Factor	0.90	0.90	0.90	0.95	0.95	0.90	0.85	0.85	0.85	0.90	0.90	0.90
Heavy Vehicles (%)	3%	3%	3%	2%	2%	2%	5%	5%	5%	4%	4%	4%
Adj. Flow (vph)	61	328	24	0	0	0	32	520	0	0	426	147
Shared Lane Traffic (%)												
Lane Group Flow (vph)	61	352	0	0	0	0	32	520	0	0	426	147
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1					1	2			2	1
Detector Template	Left						Left	Thru			Thru	
Leading Detector (ft)	20	50					20	100			100	50
Trailing Detector (ft)	0	0					0	0			0	0
Detector 1 Position(ft)	0	0					0	0			0	0
Detector 1 Size(ft)	20	50					20	6			6	50
Detector 1 Type	Cl+Ex	Cl+Ex					Cl+Ex	Cl+Ex			Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0					0.0	0.0			0.0	0.0
Detector 1 Queue (s)	0.0	0.0					0.0	0.0			0.0	0.0
Detector 1 Delay (s)	0.0	0.0					0.0	0.0			0.0	0.0
Detector 2 Position(ft)							94				94	
Detector 2 Size(ft)							6				6	
Detector 2 Type							Cl+Ex				Cl+Ex	
Detector 2 Channel												
Detector 2 Extend (s)							0.0				0.0	
Turn Type	custom	NA					D.Pm	NA			NA	Perm
Protected Phases											4	
Permitted Phases	2	2					4	4				4

# Lanes, Volumes, Timings

246: Union & Monroe

1/7/2014



Lane Group	NBL	NBT	NBR	SBL	SBT	SBR	SEL	SET	SER	NWL	NWT	NWR
Detector Phase	2	2					4	4		4	4	4
Switch Phase												
Minimum Initial (s)	9.0	9.0					3.0	3.0		3.0	3.0	
Minimum Split (s)	22.0	22.0					25.0	25.0		25.0	25.0	
Total Split (s)	28.0	28.0					52.0	52.0		52.0	52.0	
Total Split (%)	35.0%	35.0%					65.0%	65.0%		65.0%	65.0%	
Maximum Green (s)	23.0	23.0					47.0	47.0		47.0	47.0	
Yellow Time (s)	4.0	4.0					5.0	5.0		5.0	5.0	
All-Red Time (s)	1.0	1.0					0.0	0.0		0.0	0.0	
Lost Time Adjust (s)	0.0	0.0					0.0	0.0		0.0	0.0	
Total Lost Time (s)	5.0	5.0					5.0	5.0		5.0	5.0	
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	4.0	4.0					3.0	3.0		3.0	3.0	
Recall Mode	None	None					None	None		None	None	
Walk Time (s)	7.0	7.0					5.0	5.0		5.0	5.0	
Flash Dont Walk (s)	8.0	8.0					15.0	15.0		15.0	15.0	
Pedestrian Calls (#/hr)	0	0					0	0		0	0	
Act Effct Green (s)	12.1	12.1					23.0	23.0		23.0	23.0	
Actuated g/C Ratio	0.26	0.26					0.50	0.50		0.50	0.50	
v/c Ratio	0.13	0.38					0.07	0.57		0.47	0.18	
Control Delay	17.2	16.9					6.1	10.4		8.9	2.7	
Queue Delay	0.0	0.0					0.0	0.0		0.0	0.0	
Total Delay	17.2	16.9					6.1	10.4		8.9	2.7	
LOS	B	B					A	B		A	A	
Approach Delay		16.9						10.2		7.3		
Approach LOS		B						B		A		

## Intersection Summary

Area Type: Other

Cycle Length: 80

Actuated Cycle Length: 45.9

Natural Cycle: 50

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 0.57

Intersection Signal Delay: 10.9

Intersection LOS: B

Intersection Capacity Utilization 40.5%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 246: Union & Monroe



Lanes, Volumes, Timings  
246: Union & Monroe

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	20	534	0	0	433	169	66	171	32	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		50	250		250	0		0
Storage Lanes	1		0	0		1	1		0	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.95	1.00	1.00	1.00
Frt						0.850		0.976				
Flt Protected	0.950						0.950					
Satd. Flow (prot)	1787	1881	0	0	1881	1599	1752	3421	0	0	0	0
Flt Permitted	0.458						0.950					
Satd. Flow (perm)	862	1881	0	0	1881	1599	1752	3421	0	0	0	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)						140		19				
Link Speed (mph)	30			30			30			30		
Link Distance (ft)	286			720			700			476		
Travel Time (s)	6.5			16.4			15.9			10.8		
Peak Hour Factor	0.92	0.92	0.92	0.87	0.87	0.87	0.86	0.86	0.86	0.95	0.95	0.95
Heavy Vehicles (%)	1%	1%	1%	1%	1%	1%	3%	3%	3%	2%	2%	2%
Adj. Flow (vph)	22	580	0	0	498	194	77	199	37	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	22	580	0	0	498	194	77	236	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)	12			12			12			12		
Link Offset(ft)	0			0			0			0		
Crosswalk Width(ft)	16			16			16			16		
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1			1	1	1	1				
Detector Template												
Leading Detector (ft)	50	50			50	50	50	50				
Trailing Detector (ft)	0	0			0	0	0	0				
Detector 1 Position(ft)	0	0			0	0	0	0				
Detector 1 Size(ft)	50	50			50	50	50	50				
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex				
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0	0.0	0.0	0.0				
Detector 1 Queue (s)	0.0	0.0			0.0	0.0	0.0	0.0				
Detector 1 Delay (s)	0.0	0.0			0.0	0.0	0.0	0.0				
Turn Type	Perm	NA			NA	Perm	Split	NA				
Protected Phases		1			1		2	2				
Permitted Phases	1					1						
Detector Phase	1	1			1	1	2	2				
Switch Phase												
Minimum Initial (s)	7.0	7.0			7.0	7.0	9.0	9.0				
Minimum Split (s)	23.0	23.0			23.0	23.0	22.0	22.0				
Total Split (s)	75.0	75.0			75.0	75.0	25.0	25.0				

# Lanes, Volumes, Timings

246: Union & Monroe

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (%)	75.0%	75.0%			75.0%	75.0%	25.0%	25.0%				
Maximum Green (s)	70.0	70.0			70.0	70.0	20.0	20.0				
Yellow Time (s)	4.0	4.0			4.0	4.0	4.0	4.0				
All-Red Time (s)	1.0	1.0			1.0	1.0	1.0	1.0				
Lost Time Adjust (s)	0.0	0.0			0.0	0.0	0.0	0.0				
Total Lost Time (s)	5.0	5.0			5.0	5.0	5.0	5.0				
Lead/Lag	Lead	Lead			Lead	Lead	Lag	Lag				
Lead-Lag Optimize?												
Vehicle Extension (s)	2.0	2.0			2.0	2.0	4.0	4.0				
Recall Mode	C-Max	C-Max			C-Max	C-Max	None	None				
Walk Time (s)	7.0	7.0			7.0	7.0	7.0	7.0				
Flash Dont Walk (s)	11.0	11.0			11.0	11.0	8.0	8.0				
Pedestrian Calls (#/hr)	0	0			0	0	0	0				
Act Effct Green (s)	77.2	77.2			77.2	77.2	12.8	12.8				
Actuated g/C Ratio	0.77	0.77			0.77	0.77	0.13	0.13				
v/c Ratio	0.03	0.40			0.34	0.15	0.35	0.52				
Control Delay	4.5	8.0			2.1	0.4	43.2	41.1				
Queue Delay	0.0	0.3			0.0	0.0	0.0	0.0				
Total Delay	4.5	8.3			2.1	0.4	43.2	41.1				
LOS	A	A			A	A	D	D				
Approach Delay		8.1				1.6			41.6			
Approach LOS		A				A			D			

## Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 97 (97%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 50

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.52

Intersection Signal Delay: 11.8

Intersection LOS: B

Intersection Capacity Utilization 43.9%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 246: Union & Monroe





Lane Group	EBL	EBR	NBL	NBT	SBT	SBR	ø2
Lane Configurations	↖ ↗		↖ ↗	↑ ↓		↖ ↗	
Volume (vph)	69	0	123	146	0	0	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Storage Length (ft)	0	0	200			0	
Storage Lanes	2	0	1			0	
Taper Length (ft)	25		25				
Lane Util. Factor	0.97	1.00	1.00	0.95	1.00	1.00	
Frt							
Flt Protected	0.950		0.950				
Satd. Flow (prot)	3367	0	1770	3539	0	0	
Flt Permitted	0.950		0.950				
Satd. Flow (perm)	3367	0	1770	3539	0	0	
Right Turn on Red		Yes			Yes		
Satd. Flow (RTOR)							
Link Speed (mph)	30		30	30			
Link Distance (ft)	136		556	451			
Travel Time (s)	3.1		12.6	10.3			
Peak Hour Factor	0.90	0.90	0.95	0.95	0.90	0.90	
Heavy Vehicles (%)	4%	4%	2%	2%	2%	2%	
Adj. Flow (vph)	77	0	129	154	0	0	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	77	0	129	154	0	0	
Enter Blocked Intersection	No	No	No	No	No	No	
Lane Alignment	Left	Right	Left	Left	Left	Right	
Median Width(ft)	24		12	12			
Link Offset(ft)	0		0	0			
Crosswalk Width(ft)	16		16	16			
Two way Left Turn Lane							
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15	9	15			9	
Number of Detectors	1		1	1			
Detector Template							
Leading Detector (ft)	50		50	50			
Trailing Detector (ft)	0		0	0			
Detector 1 Position(ft)	0		0	0			
Detector 1 Size(ft)	50		50	50			
Detector 1 Type	Cl+Ex		Cl+Ex	Cl+Ex			
Detector 1 Channel							
Detector 1 Extend (s)	0.0		0.0	0.0			
Detector 1 Queue (s)	0.0		0.0	0.0			
Detector 1 Delay (s)	0.0		0.0	0.0			
Turn Type	Prot		Prot	NA			
Protected Phases	1		3	2 3		2	
Permitted Phases							
Detector Phase	1		3	2 3			
Switch Phase							
Minimum Initial (s)	7.0		6.0			10.0	
Minimum Split (s)	21.0		24.0			28.0	
Total Split (s)	22.0		39.0			39.0	



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR	Ø2
Total Split (%)	22.0%		39.0%				39%
Maximum Green (s)	16.0		34.0				34.0
Yellow Time (s)	4.0		4.0				4.0
All-Red Time (s)	2.0		1.0				1.0
Lost Time Adjust (s)	0.0		0.0				
Total Lost Time (s)	6.0		5.0				
Lead/Lag	Lead						Lag
Lead-Lag Optimize?							
Vehicle Extension (s)	2.0		4.0				3.0
Recall Mode	C-Max		None				None
Walk Time (s)	7.0						7.0
Flash Dont Walk (s)	8.0						15.0
Pedestrian Calls (#/hr)	0						0
Act Effct Green (s)	58.7		14.1	30.3			
Actuated g/C Ratio	0.59		0.14	0.30			
v/c Ratio	0.04		0.52	0.14			
Control Delay	1.5		46.2	24.4			
Queue Delay	0.4		0.0	0.0			
Total Delay	1.9		46.2	24.4			
LOS	A		D	C			
Approach Delay	1.9			34.3			
Approach LOS	A			C			

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 54 (54%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.55

Intersection Signal Delay: 27.4

Intersection LOS: C

Intersection Capacity Utilization 23.3%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2592: Union & Broad





Lane Group	EBL	EBR	NBL	NBT	SBT	SBR	ø2
Lane Configurations	↑↑		↑	↑↑			
Volume (vph)	174	0	54	166	0	0	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Storage Length (ft)	0	0	200			0	
Storage Lanes	2	0	1			0	
Taper Length (ft)	25		25				
Lane Util. Factor	0.97	1.00	1.00	0.95	1.00	1.00	
Frt							
Flt Protected	0.950			0.950			
Satd. Flow (prot)	3433	0	1787	3574	0	0	
Flt Permitted	0.950			0.950			
Satd. Flow (perm)	3433	0	1787	3574	0	0	
Right Turn on Red		Yes			Yes		
Satd. Flow (RTOR)							
Link Speed (mph)	30			30	30		
Link Distance (ft)	175			499	451		
Travel Time (s)	4.0			11.3	10.3		
Peak Hour Factor	0.88	0.88	0.86	0.86	0.90	0.90	
Heavy Vehicles (%)	2%	2%	1%	1%	2%	2%	
Adj. Flow (vph)	198	0	63	193	0	0	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	198	0	63	193	0	0	
Enter Blocked Intersection	No	No	No	No	No	No	
Lane Alignment	Left	Right	Left	Left	Left	Right	
Median Width(ft)	24			12	12		
Link Offset(ft)	0			0	0		
Crosswalk Width(ft)	16			16	16		
Two way Left Turn Lane							
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15	9	15			9	
Number of Detectors	1		1	1			
Detector Template							
Leading Detector (ft)	50			50	50		
Trailing Detector (ft)	0			0	0		
Detector 1 Position(ft)	0			0	0		
Detector 1 Size(ft)	50			50	50		
Detector 1 Type	Cl+Ex		Cl+Ex	Cl+Ex			
Detector 1 Channel							
Detector 1 Extend (s)	0.0			0.0	0.0		
Detector 1 Queue (s)	0.0			0.0	0.0		
Detector 1 Delay (s)	0.0			0.0	0.0		
Turn Type	Prot		Prot	NA			
Protected Phases	1		3	2 3		2	
Permitted Phases							
Detector Phase	1		3	2 3			
Switch Phase							
Minimum Initial (s)	7.0		6.0			10.0	
Minimum Split (s)	21.0		24.0			28.0	
Total Split (s)	37.0		30.0			33.0	



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR	ø2
Total Split (%)	37.0%		30.0%				33%
Maximum Green (s)	31.0		25.0				28.0
Yellow Time (s)	4.0		4.0				4.0
All-Red Time (s)	2.0		1.0				1.0
Lost Time Adjust (s)	0.0		0.0				
Total Lost Time (s)	6.0		5.0				
Lead/Lag	Lead						Lag
Lead-Lag Optimize?							
Vehicle Extension (s)	2.0		4.0				3.0
Recall Mode	C-Max		None				None
Walk Time (s)	7.0						7.0
Flash Dont Walk (s)	8.0						15.0
Pedestrian Calls (#/hr)	0						0
Act Effct Green (s)	62.6		10.1	26.4			
Actuated g/C Ratio	0.63		0.10	0.26			
v/c Ratio	0.09		0.35	0.20			
Control Delay	2.8		50.8	31.7			
Queue Delay	0.4		0.0	0.0			
Total Delay	3.3		50.8	31.7			
LOS	A		D	C			
Approach Delay	3.3			36.4			
Approach LOS	A			D			

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 25 (25%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.51

Intersection Signal Delay: 22.0


Intersection LOS: C

Intersection Capacity Utilization 23.3%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2592: Union & Broad

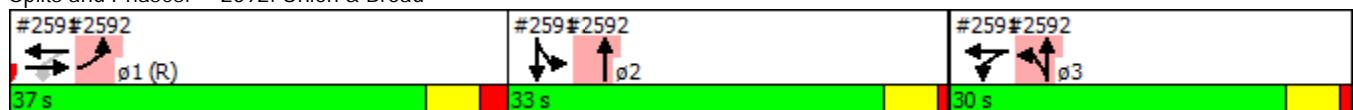

Lanes, Volumes, Timings  
2591: Pitkin & Broad

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	0	66	31	23	102	0	0	0	0	3	156	147
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	0.91	0.91	0.91
Fr <sub>t</sub>						0.850						0.928
Flt Protected						0.991						0.999
Satd. Flow (prot)	0	3471	1553	0	3507	0	0	0	0	0	4714	0
Flt Permitted						0.914						0.999
Satd. Flow (perm)	0	3471	1553	0	3235	0	0	0	0	0	4714	0
Right Turn on Red				Yes		Yes				Yes		Yes
Satd. Flow (RTOR)				76								179
Link Speed (mph)		30			30			30				30
Link Distance (ft)		786			136			477				435
Travel Time (s)		17.9			3.1			10.8				9.9
Peak Hour Factor	0.79	0.79	0.79	0.85	0.85	0.85	0.90	0.90	0.90	0.82	0.82	0.82
Heavy Vehicles (%)	4%	4%	4%	2%	2%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	0	84	39	27	120	0	0	0	0	4	190	179
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	84	39	0	147	0	0	0	0	0	373	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)	0				0			0			0	
Link Offset(ft)	0				0			0			0	
Crosswalk Width(ft)	16				16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	1	1						1	1	
Detector Template												
Leading Detector (ft)	50	50	50	50						50	50	
Trailing Detector (ft)	0	0	0	0						0	0	
Detector 1 Position(ft)	0	0	0	0						0	0	
Detector 1 Size(ft)	50	50	50	50						50	50	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex						Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0						0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0						0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0						0.0	0.0	
Turn Type	NA	Perm	D.P+P	NA						Split	NA	
Protected Phases	1		3	1 3						2	2	
Permitted Phases		1	1									
Detector Phase	1	1	3	1 3						2	2	
Switch Phase												
Minimum Initial (s)	7.0	7.0	6.0							10.0	10.0	
Minimum Split (s)	21.0	21.0	24.0							28.0	28.0	
Total Split (s)	22.0	22.0	39.0							39.0	39.0	
Total Split (%)	22.0%	22.0%	39.0%							39.0%	39.0%	
Maximum Green (s)	16.0	16.0	34.0							34.0	34.0	
Yellow Time (s)	4.0	4.0	4.0							4.0	4.0	



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
All-Red Time (s)	2.0	2.0	1.0							1.0	1.0	
Lost Time Adjust (s)	0.0	0.0									0.0	
Total Lost Time (s)	6.0	6.0									5.0	
Lead/Lag	Lead	Lead								Lag	Lag	
Lead-Lag Optimize?												
Vehicle Extension (s)	2.0	2.0	4.0							3.0	3.0	
Recall Mode	C-Max	C-Max	None							None	None	
Walk Time (s)	7.0	7.0								7.0	7.0	
Flash Dont Walk (s)	8.0	8.0								15.0	15.0	
Pedestrian Calls (#/hr)	0	0								0	0	
Act Effct Green (s)	58.7	58.7	71.9							11.1		
Actuated g/C Ratio	0.59	0.59	0.72							0.11		
v/c Ratio	0.04	0.04	0.06							0.55		
Control Delay	5.0	1.8	0.5							12.1		
Queue Delay	0.0	0.0	0.2							0.0		
Total Delay	5.0	1.8	0.7							12.1		
LOS	A	A	A							B		
Approach Delay	4.0		0.7							12.1		
Approach LOS	A		A							B		

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 54 (54%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.55

Intersection Signal Delay: 8.0

Intersection LOS: A

Intersection Capacity Utilization 34.2%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2591: Pitkin & Broad





Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	0	159	139	44	27	0	0	0	0	15	194	40
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	0.95	1.00	0.91	0.91	1.00	1.00	1.00	1.00	0.91	0.91	0.91
Fr <sub>t</sub>				0.850								0.976
Flt Protected						0.970						0.997
Satd. Flow (prot)	0	3539	1583	0	4933	0	0	0	0	0	4948	0
Flt Permitted						0.781						0.997
Satd. Flow (perm)	0	3539	1583	0	3972	0	0	0	0	0	4948	0
Right Turn on Red				Yes		Yes				Yes		Yes
Satd. Flow (RTOR)				181								40
Link Speed (mph)		30			30			30				30
Link Distance (ft)		750			175			248				439
Travel Time (s)		17.0			4.0			5.6				10.0
Peak Hour Factor	0.77	0.77	0.77	0.75	0.75	0.75	0.90	0.90	0.90	0.82	0.82	0.82
Adj. Flow (vph)	0	206	181	59	36	0	0	0	0	18	237	49
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	206	181	0	95	0	0	0	0	0	304	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			0				0
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors		1	1	1	1					1	1	
Detector Template												
Leading Detector (ft)		50	50	50	50					50	50	
Trailing Detector (ft)		0	0	0	0					0	0	
Detector 1 Position(ft)		0	0	0	0					0	0	
Detector 1 Size(ft)		50	50	50	50					50	50	
Detector 1 Type		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex					Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Detector 1 Queue (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Detector 1 Delay (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Turn Type		NA	Perm	D.P+P	NA					Split	NA	
Protected Phases		1		3	1 3					2	2	
Permitted Phases			1	1								
Detector Phase		1	1	3	1 3					2	2	
Switch Phase												
Minimum Initial (s)		7.0	7.0	6.0						10.0	10.0	
Minimum Split (s)		21.0	21.0	24.0						28.0	28.0	
Total Split (s)		37.0	37.0	30.0						33.0	33.0	
Total Split (%)		37.0%	37.0%	30.0%						33.0%	33.0%	
Maximum Green (s)		31.0	31.0	25.0						28.0	28.0	
Yellow Time (s)		4.0	4.0	4.0						4.0	4.0	
All-Red Time (s)		2.0	2.0	1.0						1.0	1.0	



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lost Time Adjust (s)		0.0	0.0								0.0	
Total Lost Time (s)		6.0	6.0								5.0	
Lead/Lag		Lead	Lead								Lag	Lag
Lead-Lag Optimize?												
Vehicle Extension (s)		2.0	2.0	4.0						3.0	3.0	
Recall Mode		C-Max	C-Max	None						None	None	
Walk Time (s)		7.0	7.0							7.0	7.0	
Flash Dont Walk (s)		8.0	8.0							15.0	15.0	
Pedestrian Calls (#/hr)		0	0							0	0	
Act Effct Green (s)		62.6	62.6	71.6							11.4	
Actuated g/C Ratio		0.63	0.63	0.72							0.11	
v/c Ratio		0.09	0.17	0.03							0.51	
Control Delay		4.2	0.3	1.1							34.8	
Queue Delay		0.0	0.0	0.0							0.0	
Total Delay		4.2	0.3	1.1							34.8	
LOS		A	A	A							C	
Approach Delay		2.4		1.1							34.8	
Approach LOS		A		A							C	

**Intersection Summary**

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 25 (25%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.51

Intersection Signal Delay: 14.8


Intersection LOS: B

Intersection Capacity Utilization 36.9%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2591: Pitkin &amp; Broad

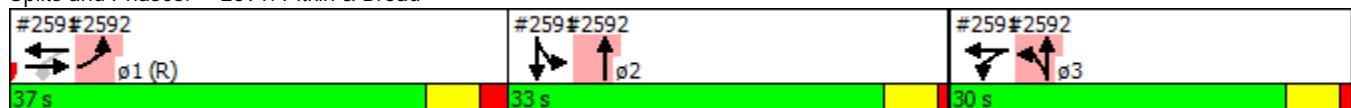

Lanes, Volumes, Timings  
2602: Union & East

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	22	295	0	0	399	67	60	83	65	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	0.95	0.95	1.00	1.00	0.95	0.95	0.95	0.95	1.00	1.00	1.00	1.00
Frt						0.978				0.850		
Flt Protected		0.997							0.979			
Satd. Flow (prot)	0	3461	0	0	3395	0	0	3366	1538	0	0	0
Flt Permitted		0.913							0.979			
Satd. Flow (perm)	0	3169	0	0	3395	0	0	3366	1538	0	0	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					25				87			
Link Speed (mph)		30			30			30		30		
Link Distance (ft)		123			667			451		780		
Travel Time (s)		2.8			15.2			10.3		17.7		
Peak Hour Factor	0.76	0.76	0.76	0.93	0.93	0.93	0.94	0.94	0.94	0.90	0.90	0.90
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%	5%	5%	5%	2%	2%	2%
Adj. Flow (vph)	29	388	0	0	429	72	64	88	69	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	417	0	0	501	0	0	152	69	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)	0				0			0		0		
Link Offset(ft)	0				0			0		0		
Crosswalk Width(ft)	16				16			16		16		
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1			1		1	1	1			
Detector Template												
Leading Detector (ft)	50	50			50		50	50	50			
Trailing Detector (ft)	0	0			0		0	0	0			
Detector 1 Position(ft)	0	0			0		0	0	0			
Detector 1 Size(ft)	50	50			50		50	50	50			
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex			
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0		0.0	0.0	0.0			
Detector 1 Queue (s)	0.0	0.0			0.0		0.0	0.0	0.0			
Detector 1 Delay (s)	0.0	0.0			0.0		0.0	0.0	0.0			
Turn Type	pm+pt	NA			NA		Split	NA	Perm			
Protected Phases	2	1 2			1		3	3				
Permitted Phases	1 2								3			
Detector Phase	2	1 2			1		3	3	3			
Switch Phase												
Minimum Initial (s)	6.0				6.0		6.0	6.0	6.0			
Minimum Split (s)	23.0				23.0		22.0	22.0	22.0			
Total Split (s)	26.0				52.0		22.0	22.0	22.0			
Total Split (%)	26.0%				52.0%		22.0%	22.0%	22.0%			
Maximum Green (s)	20.5				46.5		16.5	16.5	16.5			
Yellow Time (s)	3.5				3.5		3.5	3.5	3.5			

## Lanes, Volumes, Timings

2602: Union & East

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
All-Red Time (s)	2.0				2.0		2.0	2.0	2.0			
Lost Time Adjust (s)					0.0			0.0	0.0			
Total Lost Time (s)					5.5			5.5	5.5			
Lead/Lag	Lag					Lead						
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0				2.0		3.0	3.0	3.0			
Recall Mode	None				C-Max		None	None	None			
Walk Time (s)	7.0				7.0		7.0	7.0	7.0			
Flash Dont Walk (s)	9.0				10.0		9.0	9.0	9.0			
Pedestrian Calls (#/hr)	0				0		0	0	0			
Act Effct Green (s)	72.7				55.3			10.8	10.8			
Actuated g/C Ratio	0.73				0.55			0.11	0.11			
v/c Ratio	0.18				0.27			0.42	0.28			
Control Delay	1.0				5.6			34.9	9.1			
Queue Delay	0.5				0.0			0.0	0.0			
Total Delay	1.5				5.6			34.9	9.1			
LOS	A				A			C	A			
Approach Delay	1.5				5.6			26.9				
Approach LOS	A				A			C				

### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 16 (16%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.71

Intersection Signal Delay: 8.2


Intersection LOS: A

Intersection Capacity Utilization 39.0%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2602: Union & East

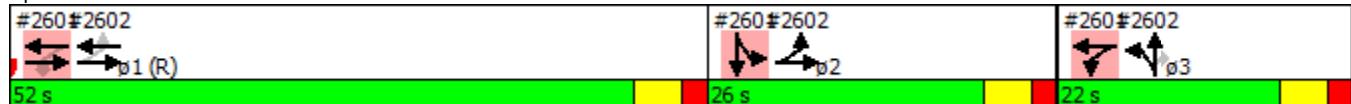

Lanes, Volumes, Timings  
2602: Union & East

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	24	546	0	0	288	57	39	140	161	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	0.95	0.95	1.00	1.00	0.95	0.95	0.95	0.95	1.00	1.00	1.00	1.00
Frt					0.975				0.850			
Flt Protected		0.998							0.989			
Satd. Flow (prot)	0	3532	0	0	3417	0	0	3500	1583	0	0	0
Flt Permitted		0.935							0.989			
Satd. Flow (perm)	0	3309	0	0	3417	0	0	3500	1583	0	0	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					24				179			
Link Speed (mph)		30			30			30		30		
Link Distance (ft)		148			667			451		567		
Travel Time (s)		3.4			15.2			10.3		12.9		
Peak Hour Factor	0.86	0.86	0.86	0.87	0.87	0.87	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	2%	2%	2%	3%	3%	3%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	28	635	0	0	331	66	43	156	179	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	663	0	0	397	0	0	199	179	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0		0		
Link Offset(ft)		0			0			0		0		
Crosswalk Width(ft)		16			16			16		16		
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1			1		1	1	1			
Detector Template												
Leading Detector (ft)	50	50			50		50	50	50			
Trailing Detector (ft)	0	0			0		0	0	0			
Detector 1 Position(ft)	0	0			0		0	0	0			
Detector 1 Size(ft)	50	50			50		50	50	50			
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex			
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0		0.0	0.0	0.0			
Detector 1 Queue (s)	0.0	0.0			0.0		0.0	0.0	0.0			
Detector 1 Delay (s)	0.0	0.0			0.0		0.0	0.0	0.0			
Turn Type	pm+pt	NA			NA		Split	NA	Perm			
Protected Phases	2	1 2			1		3	3				
Permitted Phases		1 2							3			
Detector Phase	2	1 2			1		3	3	3			
Switch Phase												
Minimum Initial (s)	6.0				6.0		6.0	6.0	6.0			
Minimum Split (s)	23.0				23.0		22.0	22.0	22.0			
Total Split (s)	34.0				35.0		31.0	31.0	31.0			
Total Split (%)	34.0%				35.0%		31.0%	31.0%	31.0%			
Maximum Green (s)	28.5				29.5		25.5	25.5	25.5			
Yellow Time (s)	3.5				3.5		3.5	3.5	3.5			

## Lanes, Volumes, Timings

2602: Union & East

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
All-Red Time (s)	2.0			2.0		2.0	2.0	2.0	2.0			
Lost Time Adjust (s)				0.0			0.0	0.0	0.0			
Total Lost Time (s)				5.5			5.5	5.5	5.5			
Lead/Lag	Lag				Lead							
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0			2.0		3.0	3.0	3.0	3.0			
Recall Mode	None			C-Max		None	None	None	None			
Walk Time (s)	7.0			7.0		7.0	7.0	7.0	7.0			
Flash Dont Walk (s)	9.0			10.0		9.0	9.0	9.0	9.0			
Pedestrian Calls (#/hr)	0			0		0	0	0	0			
Act Effct Green (s)	71.4			51.0			12.1	12.1				
Actuated g/C Ratio	0.71			0.51			0.12	0.12				
v/c Ratio	0.28			0.23			0.47	0.51				
Control Delay	0.9			23.3			47.9	17.7				
Queue Delay	0.2			0.0			0.0	0.0				
Total Delay	1.1			23.3			47.9	17.7				
LOS	A			C			D	B				
Approach Delay	1.1			23.3			33.6					
Approach LOS	A			C			C					

### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 94 (94%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.61

Intersection Signal Delay: 15.8

Intersection LOS: B

Intersection Capacity Utilization 44.3%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2602: Union & East



## Lanes, Volumes, Timings

2601: Pitkin &amp; East

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	0	150	30	119	313	0	0	0	0	171	157	23
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		125	0		0	0	0	0	0	0	0
Storage Lanes	0		1	0		0	0	0	0	1	0	0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	0.95	0.95
Frt				0.850							0.981	
Flt Protected					0.986						0.950	
Satd. Flow (prot)	0	3471	1553	0	3423	0	0	0	0	1736	3405	0
Flt Permitted					0.811						0.950	
Satd. Flow (perm)	0	3471	1553	0	2815	0	0	0	0	1736	3405	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			87									15
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		788			123			435			516	
Travel Time (s)		17.9			2.8			9.9			11.7	
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.90	0.90	0.90	0.80	0.80	0.80
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%	2%	2%	2%	4%	4%	4%
Adj. Flow (vph)	0	158	32	125	329	0	0	0	0	214	196	29
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	158	32	0	454	0	0	0	0	214	225	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors		1	1	1	1					1	1	
Detector Template												
Leading Detector (ft)		50	50	50	50					50	50	
Trailing Detector (ft)		0	0	0	0					0	0	
Detector 1 Position(ft)		0	0	0	0					0	0	
Detector 1 Size(ft)		50	50	50	50					50	50	
Detector 1 Type		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex					Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Detector 1 Queue (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Detector 1 Delay (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Turn Type	NA	Perm	pm+pt	NA						Split	NA	
Protected Phases	1		3	1 3						2	2	
Permitted Phases		1	1	3	1 3					2	2	
Detector Phase		1	1	3	1 3							
Switch Phase												
Minimum Initial (s)		6.0	6.0	6.0						6.0	6.0	
Minimum Split (s)		23.0	23.0	22.0						23.0	23.0	
Total Split (s)		52.0	52.0	22.0						26.0	26.0	

# Lanes, Volumes, Timings

2601: Pitkin & East

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (%)	52.0%	52.0%	22.0%							26.0%	26.0%	
Maximum Green (s)	46.5	46.5	16.5							20.5	20.5	
Yellow Time (s)	3.5	3.5	3.5							3.5	3.5	
All-Red Time (s)	2.0	2.0	2.0							2.0	2.0	
Lost Time Adjust (s)	0.0	0.0								0.0	0.0	
Total Lost Time (s)	5.5	5.5								5.5	5.5	
Lead/Lag	Lead	Lead								Lag	Lag	
Lead-Lag Optimize?												
Vehicle Extension (s)	2.0	2.0	3.0							3.0	3.0	
Recall Mode	C-Max	C-Max	None							None	None	
Walk Time (s)	7.0	7.0	7.0							7.0	7.0	
Flash Dont Walk (s)	10.0	10.0	9.0							9.0	9.0	
Pedestrian Calls (#/hr)	0	0	0							0	0	
Act Effct Green (s)	55.3	55.3		66.1						17.4	17.4	
Actuated g/C Ratio	0.55	0.55		0.66						0.17	0.17	
v/c Ratio	0.08	0.04		0.24						0.71	0.37	
Control Delay	11.4	2.0		1.0						52.1	35.7	
Queue Delay	0.0	0.0		0.2						0.0	0.0	
Total Delay	11.4	2.0		1.2						52.1	35.7	
LOS	B	A		A						D	D	
Approach Delay	9.8			1.2							43.7	
Approach LOS	A			A							D	

## Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 16 (16%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.71

Intersection Signal Delay: 20.0


Intersection LOS: B

Intersection Capacity Utilization 40.3%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2601: Pitkin & East

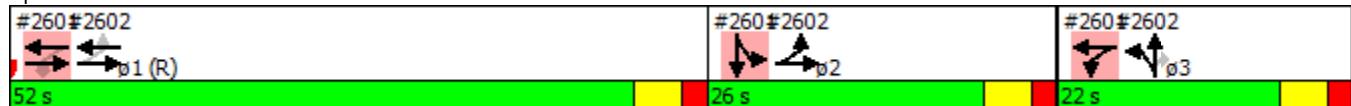

## Lanes, Volumes, Timings

2601: Pitkin &amp; East

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	0	370	51	70	261	0	0	0	0	197	108	27
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		125	0		0	0	0	0	0	0	0
Storage Lanes	0		1	0		0	0	0	0	1	0	0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	0.95	0.95
Fr <sub>t</sub>				0.850							0.970	
Flt Protected					0.990						0.950	
Satd. Flow (prot)	0	3539	1583	0	3470	0	0	0	0	1770	3433	0
Flt Permitted					0.798						0.950	
Satd. Flow (perm)	0	3539	1583	0	2797	0	0	0	0	1770	3433	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			87									30
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		763			148			439			686	
Travel Time (s)		17.3			3.4			10.0			15.6	
Peak Hour Factor	0.92	0.92	0.92	0.93	0.93	0.93	0.90	0.90	0.90	0.89	0.89	0.89
Heavy Vehicles (%)	2%	2%	2%	3%	3%	3%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	0	402	55	75	281	0	0	0	0	221	121	30
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	402	55	0	356	0	0	0	0	221	151	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors		1	1	1	1					1	1	
Detector Template												
Leading Detector (ft)		50	50	50	50					50	50	
Trailing Detector (ft)		0	0	0	0					0	0	
Detector 1 Position(ft)		0	0	0	0					0	0	
Detector 1 Size(ft)		50	50	50	50					50	50	
Detector 1 Type		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex					Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Detector 1 Queue (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Detector 1 Delay (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Turn Type	NA	Perm	pm+pt	NA						Split	NA	
Protected Phases	1		3	1 3						2	2	
Permitted Phases		1	1	3	1 3					2	2	
Detector Phase		1	1	3	1 3							
Switch Phase												
Minimum Initial (s)		6.0	6.0	6.0						6.0	6.0	
Minimum Split (s)		23.0	23.0	22.0						23.0	23.0	
Total Split (s)		35.0	35.0	31.0						34.0	34.0	

# Lanes, Volumes, Timings

2601: Pitkin & East

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (%)	35.0%	35.0%	31.0%							34.0%	34.0%	
Maximum Green (s)	29.5	29.5	25.5							28.5	28.5	
Yellow Time (s)	3.5	3.5	3.5							3.5	3.5	
All-Red Time (s)	2.0	2.0	2.0							2.0	2.0	
Lost Time Adjust (s)	0.0	0.0								0.0	0.0	
Total Lost Time (s)	5.5	5.5								5.5	5.5	
Lead/Lag	Lead	Lead								Lag	Lag	
Lead-Lag Optimize?												
Vehicle Extension (s)	2.0	2.0	3.0							3.0	3.0	
Recall Mode	C-Max	C-Max	None							None	None	
Walk Time (s)	7.0	7.0	7.0							7.0	7.0	
Flash Dont Walk (s)	10.0	10.0	9.0							9.0	9.0	
Pedestrian Calls (#/hr)	0	0	0							0	0	
Act Effct Green (s)	51.0	51.0		63.1						20.4	20.4	
Actuated g/C Ratio	0.51	0.51		0.63						0.20	0.20	
v/c Ratio	0.22	0.06		0.19						0.61	0.21	
Control Delay	10.9	0.2		6.5						45.7	28.1	
Queue Delay	0.0	0.0		0.1						0.0	0.0	
Total Delay	10.9	0.2		6.6						45.7	28.1	
LOS	B	A		A						D	C	
Approach Delay	9.6			6.6							38.6	
Approach LOS	A			A							D	

## Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 94 (94%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.61

Intersection Signal Delay: 17.8

Intersection LOS: B

Intersection Capacity Utilization 44.1%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2601: Pitkin & East



Lanes, Volumes, Timings  
3044: Union & University

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	0	353	0	0	456	24	118	151	58	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	0.95	0.95	1.00	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00
Frt						0.993			0.959			
Flt Protected								0.950				
Satd. Flow (prot)	0	3471	0	0	3382	0	1703	3266	0	0	0	0
Flt Permitted								0.950				
Satd. Flow (perm)	0	3471	0	0	3382	0	1703	3266	0	0	0	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)						8			60			
Link Speed (mph)		30				30			30			30
Link Distance (ft)		316				584			383			361
Travel Time (s)		7.2				13.3			8.7			8.2
Peak Hour Factor	0.88	0.88	0.88	0.92	0.92	0.92	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	4%	4%	4%	6%	6%	6%	6%	6%	6%	2%	2%	2%
Adj. Flow (vph)	0	401	0	0	496	26	131	168	64	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	401	0	0	522	0	131	232	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)	0				0			12			12	
Link Offset(ft)	0				0			0			0	
Crosswalk Width(ft)	16				16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1			1		1	1				
Detector Template												
Leading Detector (ft)	50	50			50		50	50				
Trailing Detector (ft)	0	0			0		0	0				
Detector 1 Position(ft)	0	0			0		0	0				
Detector 1 Size(ft)	50	50			50		50	50				
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex		Cl+Ex	Cl+Ex				
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0		0.0	0.0				
Detector 1 Queue (s)	0.0	0.0			0.0		0.0	0.0				
Detector 1 Delay (s)	0.0	0.0			0.0		0.0	0.0				
Turn Type	NA				NA		Split	NA				
Protected Phases	2 3				2 3		1	1				
Permitted Phases	2				2 3							
Detector Phase	2	2 3			2 3		1	1				
Switch Phase												
Minimum Initial (s)	6.0						7.0	7.0				
Minimum Split (s)	15.0						30.0	30.0				
Total Split (s)	30.0						40.0	40.0				
Total Split (%)	30.0%						40.0%	40.0%				
Maximum Green (s)	24.0						34.0	34.0				
Yellow Time (s)	3.5						3.5	3.5				

Lane Group	ø3
Lane Configurations	
Volume (vph)	
Ideal Flow (vphpl)	
Lane Util. Factor	
Fr <sub>t</sub>	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Right Turn on Red	
Satd. Flow (RTOR)	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Heavy Vehicles (%)	
Adj. Flow (vph)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Enter Blocked Intersection	
Lane Alignment	
Median Width(ft)	
Link Offset(ft)	
Crosswalk Width(ft)	
Two way Left Turn Lane	
Headway Factor	
Turning Speed (mph)	
Number of Detectors	
Detector Template	
Leading Detector (ft)	
Trailing Detector (ft)	
Detector 1 Position(ft)	
Detector 1 Size(ft)	
Detector 1 Type	
Detector 1 Channel	
Detector 1 Extend (s)	
Detector 1 Queue (s)	
Detector 1 Delay (s)	
Turn Type	
Protected Phases	3
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	6.0
Minimum Split (s)	15.0
Total Split (s)	30.0
Total Split (%)	30%
Maximum Green (s)	23.5
Yellow Time (s)	3.5



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
All-Red Time (s)	2.5						2.5	2.5				
Lost Time Adjust (s)							0.0	0.0				
Total Lost Time (s)							6.0	6.0				
Lead/Lag	Lag						Lead	Lead				
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0						3.0	3.0				
Recall Mode	None						C-Max	C-Max				
Walk Time (s)							7.0	7.0				
Flash Dont Walk (s)							16.0	16.0				
Pedestrian Calls (#/hr)							0	0				
Act Effct Green (s)	53.5			53.5			34.5	34.5				
Actuated g/C Ratio	0.54			0.54			0.34	0.34				
v/c Ratio	0.22			0.29			0.22	0.20				
Control Delay	4.3			3.8			20.4	13.3				
Queue Delay	0.0			0.0			0.0	0.0				
Total Delay	4.3			3.8			20.4	13.3				
LOS	A			A			C	B				
Approach Delay	4.3			3.8				15.8				
Approach LOS	A			A				B				

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 38 (38%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.77

Intersection Signal Delay: 7.4

Intersection LOS: A

Intersection Capacity Utilization 29.9%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 3044: Union & University



Lane Group	ø3
All-Red Time (s)	3.0
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Vehicle Extension (s)	3.0
Recall Mode	None
Walk Time (s)	
Flash Dont Walk (s)	
Pedestrian Calls (#/hr)	
Act Effect Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Intersection Summary	

Lanes, Volumes, Timings  
3044: Union & University

1/7/2014

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	5	512	0	0	408	30	208	215	100	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	0.95	0.95	1.00	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00
Fr <sub>t</sub>					0.990				0.952			
Flt Protected								0.950				
Satd. Flow (prot)	0	3539	0	0	3504	0	1770	3369	0	0	0	0
Flt Permitted		0.950					0.950					
Satd. Flow (perm)	0	3362	0	0	3504	0	1770	3369	0	0	0	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					12			82				
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		298			584			576			361	
Travel Time (s)		6.8			13.3			13.1			8.2	
Peak Hour Factor	0.78	0.78	0.78	0.78	0.78	0.78	0.86	0.86	0.86	0.90	0.90	0.90
Adj. Flow (vph)	6	656	0	0	523	38	242	250	116	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	662	0	0	561	0	242	366	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1			1		1	1				
Detector Template												
Leading Detector (ft)	50	50			50		50	50				
Trailing Detector (ft)	0	0			0		0	0				
Detector 1 Position(ft)	0	0			0		0	0				
Detector 1 Size(ft)	50	50			50		50	50				
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex		Cl+Ex	Cl+Ex				
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0		0.0	0.0				
Detector 1 Queue (s)	0.0	0.0			0.0		0.0	0.0				
Detector 1 Delay (s)	0.0	0.0			0.0		0.0	0.0				
Turn Type	custom	NA			NA		Split	NA				
Protected Phases		2 3			2 3		1	1				
Permitted Phases	2				2 3							
Detector Phase	2	2 3			2 3		1	1				
Switch Phase												
Minimum Initial (s)	6.0					7.0	7.0					
Minimum Split (s)	15.0					30.0	30.0					
Total Split (s)	31.0					40.0	40.0					
Total Split (%)	31.0%					40.0%	40.0%					
Maximum Green (s)	25.0					34.0	34.0					
Yellow Time (s)	3.5					3.5	3.5					
All-Red Time (s)	2.5					2.5	2.5					

Lane Group	ø3
Lane Configurations	
Volume (vph)	
Ideal Flow (vphpl)	
Lane Util. Factor	
Fr <sub>t</sub>	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Right Turn on Red	
Satd. Flow (RTOR)	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Adj. Flow (vph)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Enter Blocked Intersection	
Lane Alignment	
Median Width(ft)	
Link Offset(ft)	
Crosswalk Width(ft)	
Two way Left Turn Lane	
Headway Factor	
Turning Speed (mph)	
Number of Detectors	
Detector Template	
Leading Detector (ft)	
Trailing Detector (ft)	
Detector 1 Position(ft)	
Detector 1 Size(ft)	
Detector 1 Type	
Detector 1 Channel	
Detector 1 Extend (s)	
Detector 1 Queue (s)	
Detector 1 Delay (s)	
Turn Type	
Protected Phases	3
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	6.0
Minimum Split (s)	15.0
Total Split (s)	29.0
Total Split (%)	29%
Maximum Green (s)	22.5
Yellow Time (s)	3.5
All-Red Time (s)	3.0



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lost Time Adjust (s)							0.0	0.0				
Total Lost Time (s)							6.0	6.0				
Lead/Lag	Lag						Lead	Lead				
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0						3.0	3.0				
Recall Mode	None						C-Max	C-Max				
Walk Time (s)							7.0	7.0				
Flash Dont Walk (s)							16.0	16.0				
Pedestrian Calls (#/hr)							0	0				
Act Effct Green (s)	54.0			54.0			34.0	34.0				
Actuated g/C Ratio	0.54			0.54			0.34	0.34				
v/c Ratio	0.36			0.30			0.40	0.31				
Control Delay	6.7			8.2			33.3	24.4				
Queue Delay	0.8			0.0			0.0	0.0				
Total Delay	7.5			8.2			33.3	24.4				
LOS	A			A			C	C				
Approach Delay	7.5			8.2			27.9					
Approach LOS	A			A			C					

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 51 (51%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.95

Intersection Signal Delay: 14.5

Intersection LOS: B

Intersection Capacity Utilization 39.2%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 3044: Union & University



Lane Group	ø3
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Vehicle Extension (s)	3.0
Recall Mode	None
Walk Time (s)	
Flash Dont Walk (s)	
Pedestrian Calls (#/hr)	
Act Effct Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Intersection Summary	

Lanes, Volumes, Timings  
3042: University/IL WB & Main

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	9	283	139	1	602	445	212	369	3	425	341	10
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	125		0	0		0	0		0	250		250
Storage Lanes	1		1	0		1	1		0	1		1
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.91	0.91	0.95	0.95	1.00	0.91	0.91	0.95	0.91	0.91	0.95
Frt		0.993	0.850			0.850		0.999			0.997	
Flt Protected	0.950						0.950	0.997		0.950	0.984	
Satd. Flow (prot)	1597	3039	1301	0	3312	1482	1579	3312	0	1507	3112	0
Flt Permitted	0.282				0.955		0.950	0.997		0.950	0.984	
Satd. Flow (perm)	474	3039	1301	0	3163	1482	1579	3312	0	1507	3112	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		5	142			83		1			2	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		297			291			316			371	
Travel Time (s)		6.8			6.6			7.2			8.4	
Peak Hour Factor	0.87	0.87	0.87	0.90	0.90	0.90	0.81	0.81	0.81	0.92	0.92	0.92
Heavy Vehicles (%)	13%	13%	13%	9%	9%	9%	4%	4%	4%	9%	9%	9%
Adj. Flow (vph)	10	325	160	1	669	494	262	456	4	462	371	11
Shared Lane Traffic (%)			10%				11%			40%		
Lane Group Flow (vph)	10	341	144	0	670	494	233	489	0	277	567	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	1	1	1	1	1	1		1	1	
Detector Template												
Leading Detector (ft)	50	50	50	50	50	50	50	50		50	50	
Trailing Detector (ft)	0	0	0	0	0	0	0	0		0	0	
Detector 1 Position(ft)	0	0	0	0	0	0	0	0		0	0	
Detector 1 Size(ft)	50	50	50	50	50	50	50	50		50	50	
Detector 1 Type	Cl+Ex		Cl+Ex	Cl+Ex								
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		0.0	0.0	
Turn Type	Perm	NA	pm+ov	Perm	NA	pm+ov	Split	NA		Split	NA	
Protected Phases		1	3		1	2	3	3		2	2	
Permitted Phases	1		1	1		1						
Detector Phase	1	1	3	1	1	2	3	3		2	2	
Switch Phase												
Minimum Initial (s)	7.0	7.0	6.0	7.0	7.0	6.0	6.0	6.0		6.0	6.0	
Minimum Split (s)	30.0	30.0	15.0	30.0	30.0	15.0	15.0	15.0		15.0	15.0	
Total Split (s)	40.0	40.0	30.0	40.0	40.0	30.0	30.0	30.0		30.0	30.0	



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (%)	40.0%	40.0%	30.0%	40.0%	40.0%	30.0%	30.0%	30.0%	30.0%	30.0%	30.0%	30.0%
Maximum Green (s)	34.0	34.0	23.5	34.0	34.0	24.0	23.5	23.5	24.0	24.0	24.0	24.0
Yellow Time (s)	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
All-Red Time (s)	2.5	2.5	3.0	2.5	2.5	2.5	3.0	3.0	2.5	2.5	2.5	2.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.0	6.0	6.5		6.0	6.0	6.5	6.5	6.0	6.0	6.0	6.0
Lead/Lag	Lead	Lead		Lead	Lead	Lag			Lag	Lag		
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	C-Max	C-Max	None	C-Max	C-Max	None						
Walk Time (s)	7.0	7.0		7.0	7.0							
Flash Dont Walk (s)	16.0	16.0		16.0	16.0							
Pedestrian Calls (#/hr)	0	0		0	0							
Act Effct Green (s)	34.5	34.5	63.5		34.5	64.5	23.0	23.0	24.0	24.0	24.0	24.0
Actuated g/C Ratio	0.34	0.34	0.64		0.34	0.64	0.23	0.23	0.24	0.24	0.24	0.24
v/c Ratio	0.06	0.32	0.16		0.61	0.50	0.64	0.64	0.77	0.77	0.76	0.76
Control Delay	24.4	24.1	5.7		8.2	5.5	38.8	34.1	51.1	42.7		
Queue Delay	0.0	0.0	0.0		0.2	2.2	0.8	0.6	0.0	0.0		
Total Delay	24.4	24.1	5.7		8.3	7.7	39.6	34.7	51.1	42.7		
LOS	C	C	A		A	A	D	C		D	D	
Approach Delay		18.7			8.1			36.3		45.4		
Approach LOS		B			A			D		D		

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 38 (38%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.77

Intersection Signal Delay: 25.8

Intersection LOS: C

Intersection Capacity Utilization 63.2%

ICU Level of Service B

Analysis Period (min) 15

Splits and Phases: 3042: University/IL WB & Main



Lanes, Volumes, Timings  
3042: University/IL WB & Main

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	18	498	200	0	491	430	214	418	1	398	316	5
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	125		0	0		0	0		0	250		250
Storage Lanes	1		1	0		1	1		0	1		1
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.91	0.91	1.00	0.95	1.00	0.91	0.91	0.95	0.91	0.91	0.95
Frt		0.994	0.850			0.850					0.998	
Flt Protected	0.950						0.950	0.998		0.950	0.983	
Satd. Flow (prot)	1736	3305	1413	0	3438	1538	1610	3383	0	1595	3294	0
Flt Permitted	0.375						0.950	0.998		0.950	0.983	
Satd. Flow (perm)	685	3305	1413	0	3438	1538	1610	3383	0	1595	3294	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		4	154			56					1	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		298			291			298			403	
Travel Time (s)		6.8			6.6			6.8			9.2	
Peak Hour Factor	0.83	0.83	0.83	0.93	0.93	0.93	0.84	0.84	0.84	0.85	0.85	0.85
Heavy Vehicles (%)	4%	4%	4%	5%	5%	5%	2%	2%	2%	3%	3%	3%
Adj. Flow (vph)	22	600	241	0	528	462	255	498	1	468	372	6
Shared Lane Traffic (%)			10%				10%				41%	
Lane Group Flow (vph)	22	624	217	0	528	462	229	525	0	276	570	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	1		1	1	1	1		1	1	
Detector Template												
Leading Detector (ft)	50	50	50		50	50	50	50		50	50	
Trailing Detector (ft)	0	0	0		0	0	0	0		0	0	
Detector 1 Position(ft)	0	0	0		0	0	0	0		0	0	
Detector 1 Size(ft)	50	50	50		50	50	50	50		50	50	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0		0.0	0.0	
Turn Type	Perm	NA	pm+ov		NA	pm+ov	Split	NA		Split	NA	
Protected Phases		1	3		1	2	3	3		2	2	
Permitted Phases	1		1			1						
Detector Phase	1	1	3		1	2	3	3		2	2	
Switch Phase												
Minimum Initial (s)	7.0	7.0	6.0		7.0	6.0	6.0	6.0		6.0	6.0	
Minimum Split (s)	30.0	30.0	15.0		30.0	15.0	15.0	15.0		15.0	15.0	
Total Split (s)	40.0	40.0	29.0		40.0	31.0	29.0	29.0		31.0	31.0	



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (%)	40.0%	40.0%	29.0%		40.0%	31.0%	29.0%	29.0%		31.0%	31.0%	
Maximum Green (s)	34.0	34.0	22.5		34.0	25.0	22.5	22.5		25.0	25.0	
Yellow Time (s)	3.5	3.5	3.5		3.5	3.5	3.5	3.5		3.5	3.5	
All-Red Time (s)	2.5	2.5	3.0		2.5	2.5	3.0	3.0		2.5	2.5	
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.0	6.0	6.5		6.0	6.0	6.5	6.5		6.0	6.0	
Lead/Lag	Lead	Lead			Lead	Lag				Lag	Lag	
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0	3.0		3.0	3.0	3.0	3.0		3.0	3.0	
Recall Mode	C-Max	C-Max	None		C-Max	None	None	None		None	None	
Walk Time (s)	7.0	7.0			7.0							
Flash Dont Walk (s)	16.0	16.0			16.0							
Pedestrian Calls (#/hr)	0	0			0							
Act Effct Green (s)	34.0	34.0	62.5		34.0	65.0	22.5	22.5		25.0	25.0	
Actuated g/C Ratio	0.34	0.34	0.62		0.34	0.65	0.22	0.22		0.25	0.25	
v/c Ratio	0.09	0.55	0.23		0.45	0.45	0.63	0.69		0.69	0.69	
Control Delay	18.0	19.3	4.2		10.8	1.3	37.9	35.0		44.5	39.1	
Queue Delay	0.0	0.4	0.4		0.7	2.2	1.8	1.9		0.0	0.0	
Total Delay	18.0	19.7	4.6		11.5	3.5	39.8	36.9		44.5	39.1	
LOS	B	B	A		B	A	D	D		D	D	
Approach Delay		15.8			7.8		37.8			40.8		
Approach LOS		B			A		D			D		

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 51 (51%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.95

Intersection Signal Delay: 24.4

Intersection LOS: C

Intersection Capacity Utilization 59.7%

ICU Level of Service B

Analysis Period (min) 15

Splits and Phases: 3042: University/IL WB & Main



Lanes, Volumes, Timings  
3043: Union & Main

1/7/2014

Lane Configurations												
Volume (vph)	51	663	0	0	957	24	4	88	104	29	0	87
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	125		0	0		0	0		0	0		0
Storage Lanes	1		0	0		0	1		0	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.91	1.00	1.00	0.91	0.91	1.00	0.95	0.95	1.00	1.00	1.00
Frt					0.996			0.919			0.899	
Flt Protected	0.950						0.950				0.988	
Satd. Flow (prot)	1641	4715	0	0	4874	0	1597	2936	0	0	1493	0
Flt Permitted	0.166						0.664				0.869	
Satd. Flow (perm)	287	4715	0	0	4874	0	1116	2936	0	0	1314	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					4			114			99	
Link Speed (mph)	30				30			30			30	
Link Distance (ft)	291				715			361			297	
Travel Time (s)	6.6				16.3			8.2			6.8	
Peak Hour Factor	0.82	0.82	0.82	0.92	0.92	0.92	0.91	0.91	0.91	0.88	0.88	0.88
Heavy Vehicles (%)	10%	10%	10%	6%	6%	6%	13%	13%	13%	13%	13%	13%
Adj. Flow (vph)	62	809	0	0	1040	26	4	97	114	33	0	99
Shared Lane Traffic (%)												
Lane Group Flow (vph)	62	809	0	0	1066	0	4	211	0	0	132	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)	12				12			12			12	
Link Offset(ft)	0				0			0			0	
Crosswalk Width(ft)	16				16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1			1		1	1		1	1	
Detector Template												
Leading Detector (ft)	50	50			50		50	50		50	50	
Trailing Detector (ft)	0	0			0		0	0		0	0	
Detector 1 Position(ft)	0	0			0		0	0		0	0	
Detector 1 Size(ft)	50	50			50		50	50		50	50	
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0			0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0			0.0		0.0	0.0		0.0	0.0	
Turn Type	pm+pt	NA			NA		Perm	NA		Perm	NA	
Protected Phases	2	1 2			1			3			3	
Permitted Phases	1 2							3			3	
Detector Phase	2	1 2			1		3	3		3	3	
Switch Phase												
Minimum Initial (s)	6.0				7.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	15.0				30.0		15.0	15.0		15.0	15.0	
Total Split (s)	30.0				40.0		30.0	30.0		30.0	30.0	

Lanes, Volumes, Timings  
3043: Union & Main

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (%)	30.0%				40.0%	30.0%	30.0%	30.0%	30.0%	30.0%	30.0%
Maximum Green (s)	24.0				34.0	23.5	23.5		23.5	23.5	
Yellow Time (s)	3.5				3.5	3.5	3.5		3.5	3.5	
All-Red Time (s)	2.5				2.5	3.0	3.0		3.0	3.0	
Lost Time Adjust (s)	0.0				0.0	0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.0				6.0	6.5	6.5		6.5	6.5	
Lead/Lag	Lag				Lead						
Lead-Lag Optimize?											
Vehicle Extension (s)	3.0				3.0	3.0	3.0		3.0	3.0	
Recall Mode	None				C-Max	None	None		None	None	
Walk Time (s)					7.0						
Flash Dont Walk (s)					16.0						
Pedestrian Calls (#/hr)					0						
Act Effct Green (s)	58.5	64.5			34.5	23.0	23.0		23.0	23.0	
Actuated g/C Ratio	0.58	0.64			0.34	0.23	0.23		0.23	0.23	
v/c Ratio	0.13	0.27			0.63	0.02	0.28		0.35	0.35	
Control Delay	4.9	3.5			25.5	45.5	31.0		13.2	13.2	
Queue Delay	0.0	0.2			0.0	0.0	0.0		0.0	0.0	
Total Delay	4.9	3.7			25.5	45.5	31.0		13.2	13.2	
LOS	A	A			C	D	C		B		
Approach Delay		3.8			25.5		31.2		13.2		
Approach LOS		A			C		C		B		

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 38 (38%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.77

Intersection Signal Delay: 17.1

Intersection LOS: B

Intersection Capacity Utilization 57.6%

ICU Level of Service B

Analysis Period (min) 15

Splits and Phases: 3043: Union & Main



Lanes, Volumes, Timings  
3043: Union & Main

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	48	853	0	0	868	61	5	100	173	28	0	48
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	125		0	0		0	0		0	0		0
Storage Lanes	1		0	0		0	1		0	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.91	1.00	1.00	*0.60	0.91	1.00	0.95	0.95	1.00	1.00	1.00
Frt					0.990			0.905			0.915	
Flt Protected	0.950						0.950				0.982	
Satd. Flow (prot)	1752	5036	0	0	3256	0	1770	3203	0	0	1642	0
Flt Permitted	0.118						0.730				0.784	
Satd. Flow (perm)	218	5036	0	0	3256	0	1360	3203	0	0	1311	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					7			153			98	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		291			715			361			297	
Travel Time (s)		6.6			16.3			8.2			6.8	
Peak Hour Factor	0.88	0.88	0.88	0.88	0.88	0.88	0.92	0.92	0.92	0.78	0.78	0.78
Heavy Vehicles (%)	3%	3%	3%	4%	4%	4%	2%	2%	2%	4%	4%	4%
Adj. Flow (vph)	55	969	0	0	986	69	5	109	188	36	0	62
Shared Lane Traffic (%)												
Lane Group Flow (vph)	55	969	0	0	1055	0	5	297	0	0	98	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1			1		1	1		1	1	
Detector Template												
Leading Detector (ft)	50	50			50		50	50		50	50	
Trailing Detector (ft)	0	0			0		0	0		0	0	
Detector 1 Position(ft)	0	0			0		0	0		0	0	
Detector 1 Size(ft)	50	50			50		50	50		50	50	
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0			0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0			0.0		0.0	0.0		0.0	0.0	
Turn Type	pm+pt	NA			NA		Perm	NA		Perm	NA	
Protected Phases	2	1 2			1			3			3	
Permitted Phases	1 2							3			3	
Detector Phase	2	1 2			1		3	3		3	3	
Switch Phase												
Minimum Initial (s)	6.0				7.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	15.0				30.0		15.0	15.0		15.0	15.0	
Total Split (s)	31.0				40.0		29.0	29.0		29.0	29.0	

Lanes, Volumes, Timings  
3043: Union & Main

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (%)	31.0%				40.0%		29.0%	29.0%		29.0%	29.0%	
Maximum Green (s)	25.0				34.0		22.5	22.5		22.5	22.5	
Yellow Time (s)	3.5				3.5		3.5	3.5		3.5	3.5	
All-Red Time (s)	2.5				2.5		3.0	3.0		3.0	3.0	
Lost Time Adjust (s)	0.0				0.0		0.0	0.0		0.0		
Total Lost Time (s)	6.0				6.0		6.5	6.5		6.5		
Lead/Lag	Lag					Lead						
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0				3.0		3.0	3.0		3.0	3.0	
Recall Mode	None				C-Max		None	None		None	None	
Walk Time (s)						7.0						
Flash Dont Walk (s)						16.0						
Pedestrian Calls (#/hr)						0						
Act Effct Green (s)	59.0	65.0			34.0		22.5	22.5		22.5		
Actuated g/C Ratio	0.59	0.65			0.34		0.22	0.22		0.22		
v/c Ratio	0.11	0.30			0.95		0.02	0.35		0.26		
Control Delay	2.8	1.8			43.3		48.0	32.5		8.7		
Queue Delay	0.0	0.2			0.0		0.0	0.0		0.0		
Total Delay	2.8	2.0			43.3		48.0	32.5		8.7		
LOS	A	A			D		D	C		A		
Approach Delay		2.1			43.3			32.8		8.7		
Approach LOS		A			D			C		A		

Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 51 (51%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.95

Intersection Signal Delay: 23.6

Intersection LOS: C

Intersection Capacity Utilization 57.3%

ICU Level of Service B

Analysis Period (min) 15

\* User Entered Value


Splits and Phases: 3043: Union & Main




# **Appendix G – Traffic Analysis Contents**

## **2015 ETC Conditions**

- 2015 ETC Traffic Volumes**
- 2015 ETC Capacity Analysis Printouts**
- Synchro Files (available upon request)**

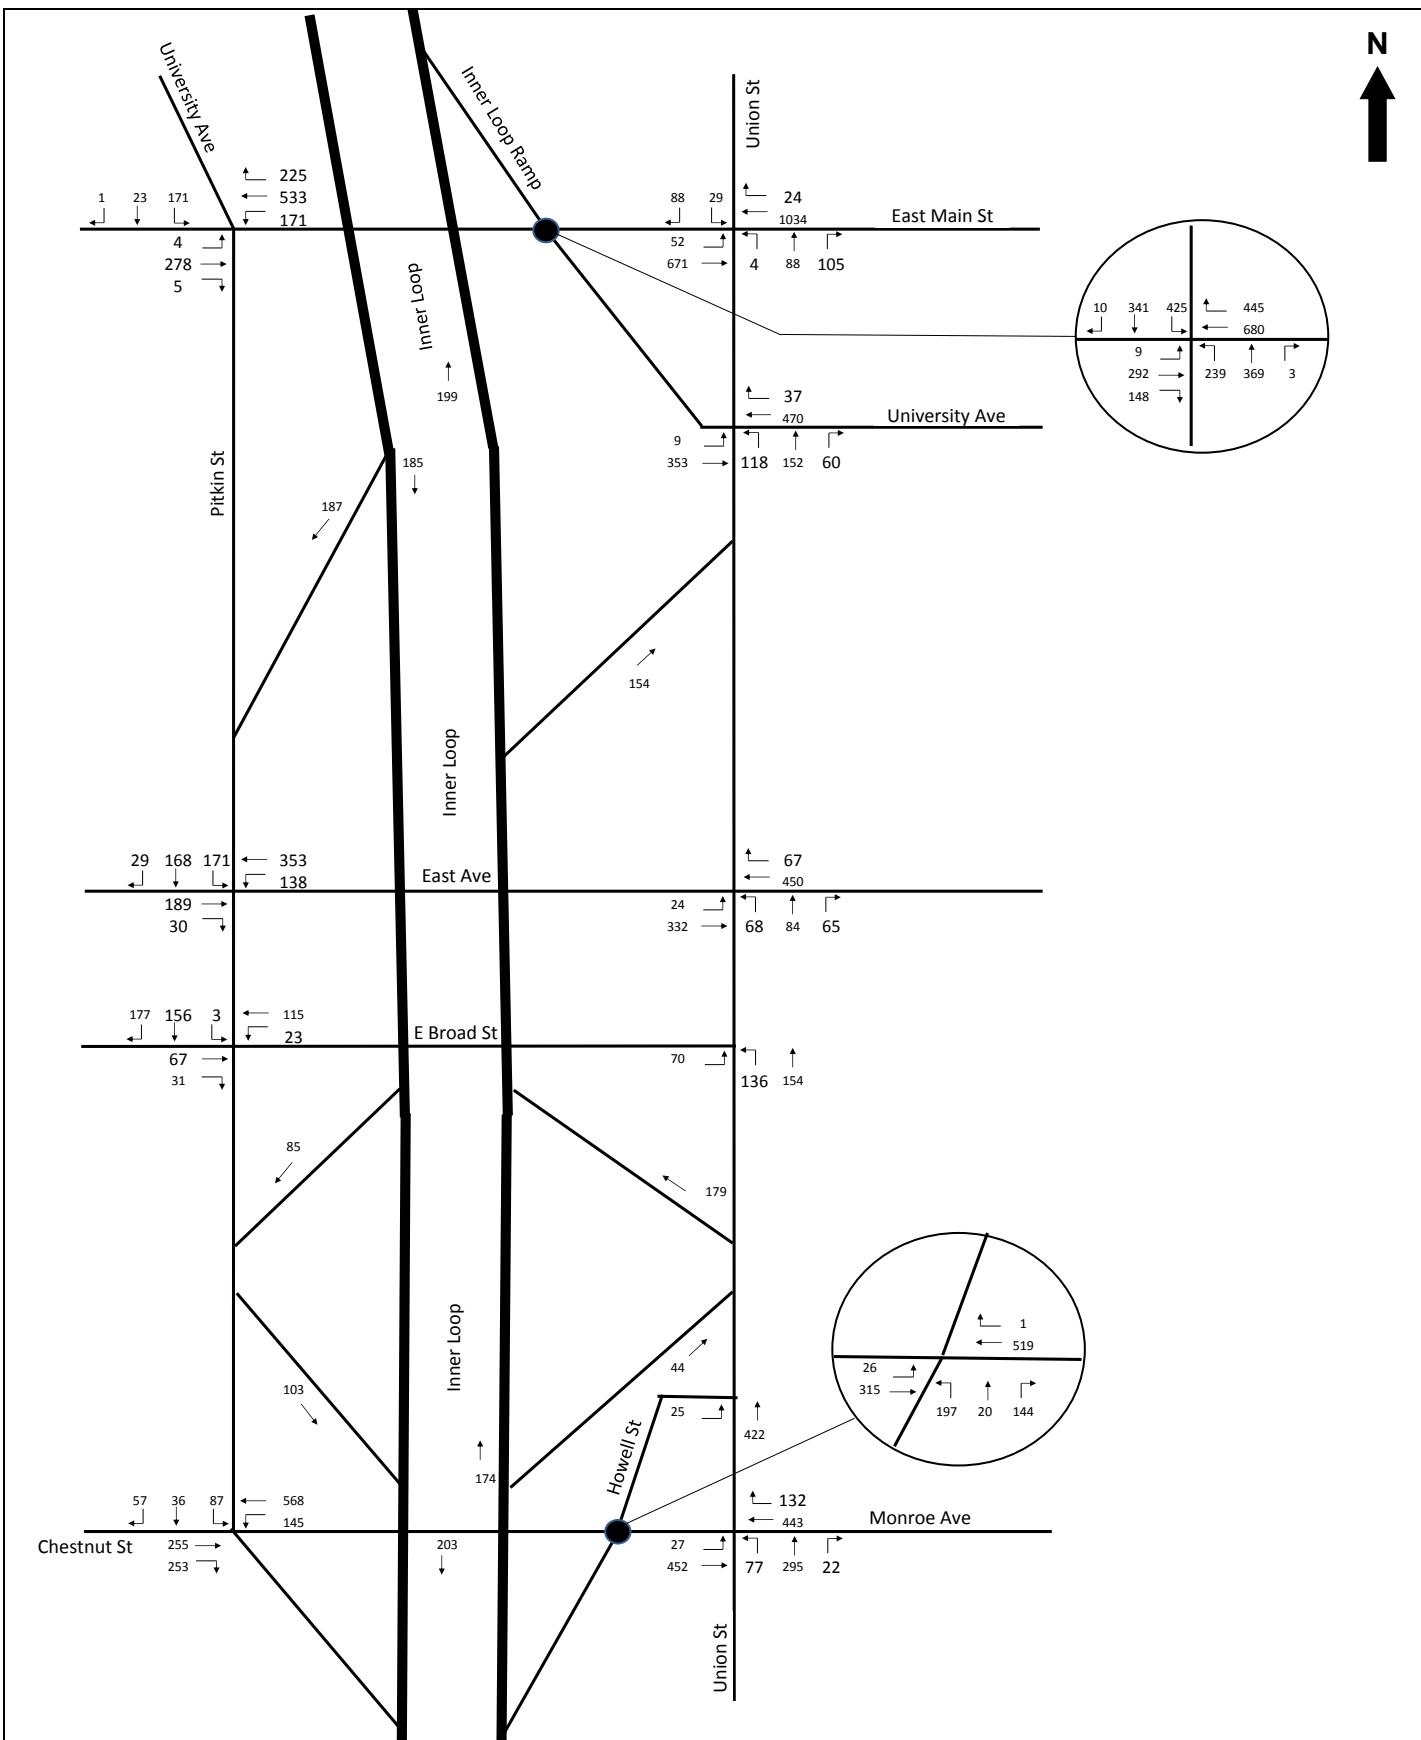

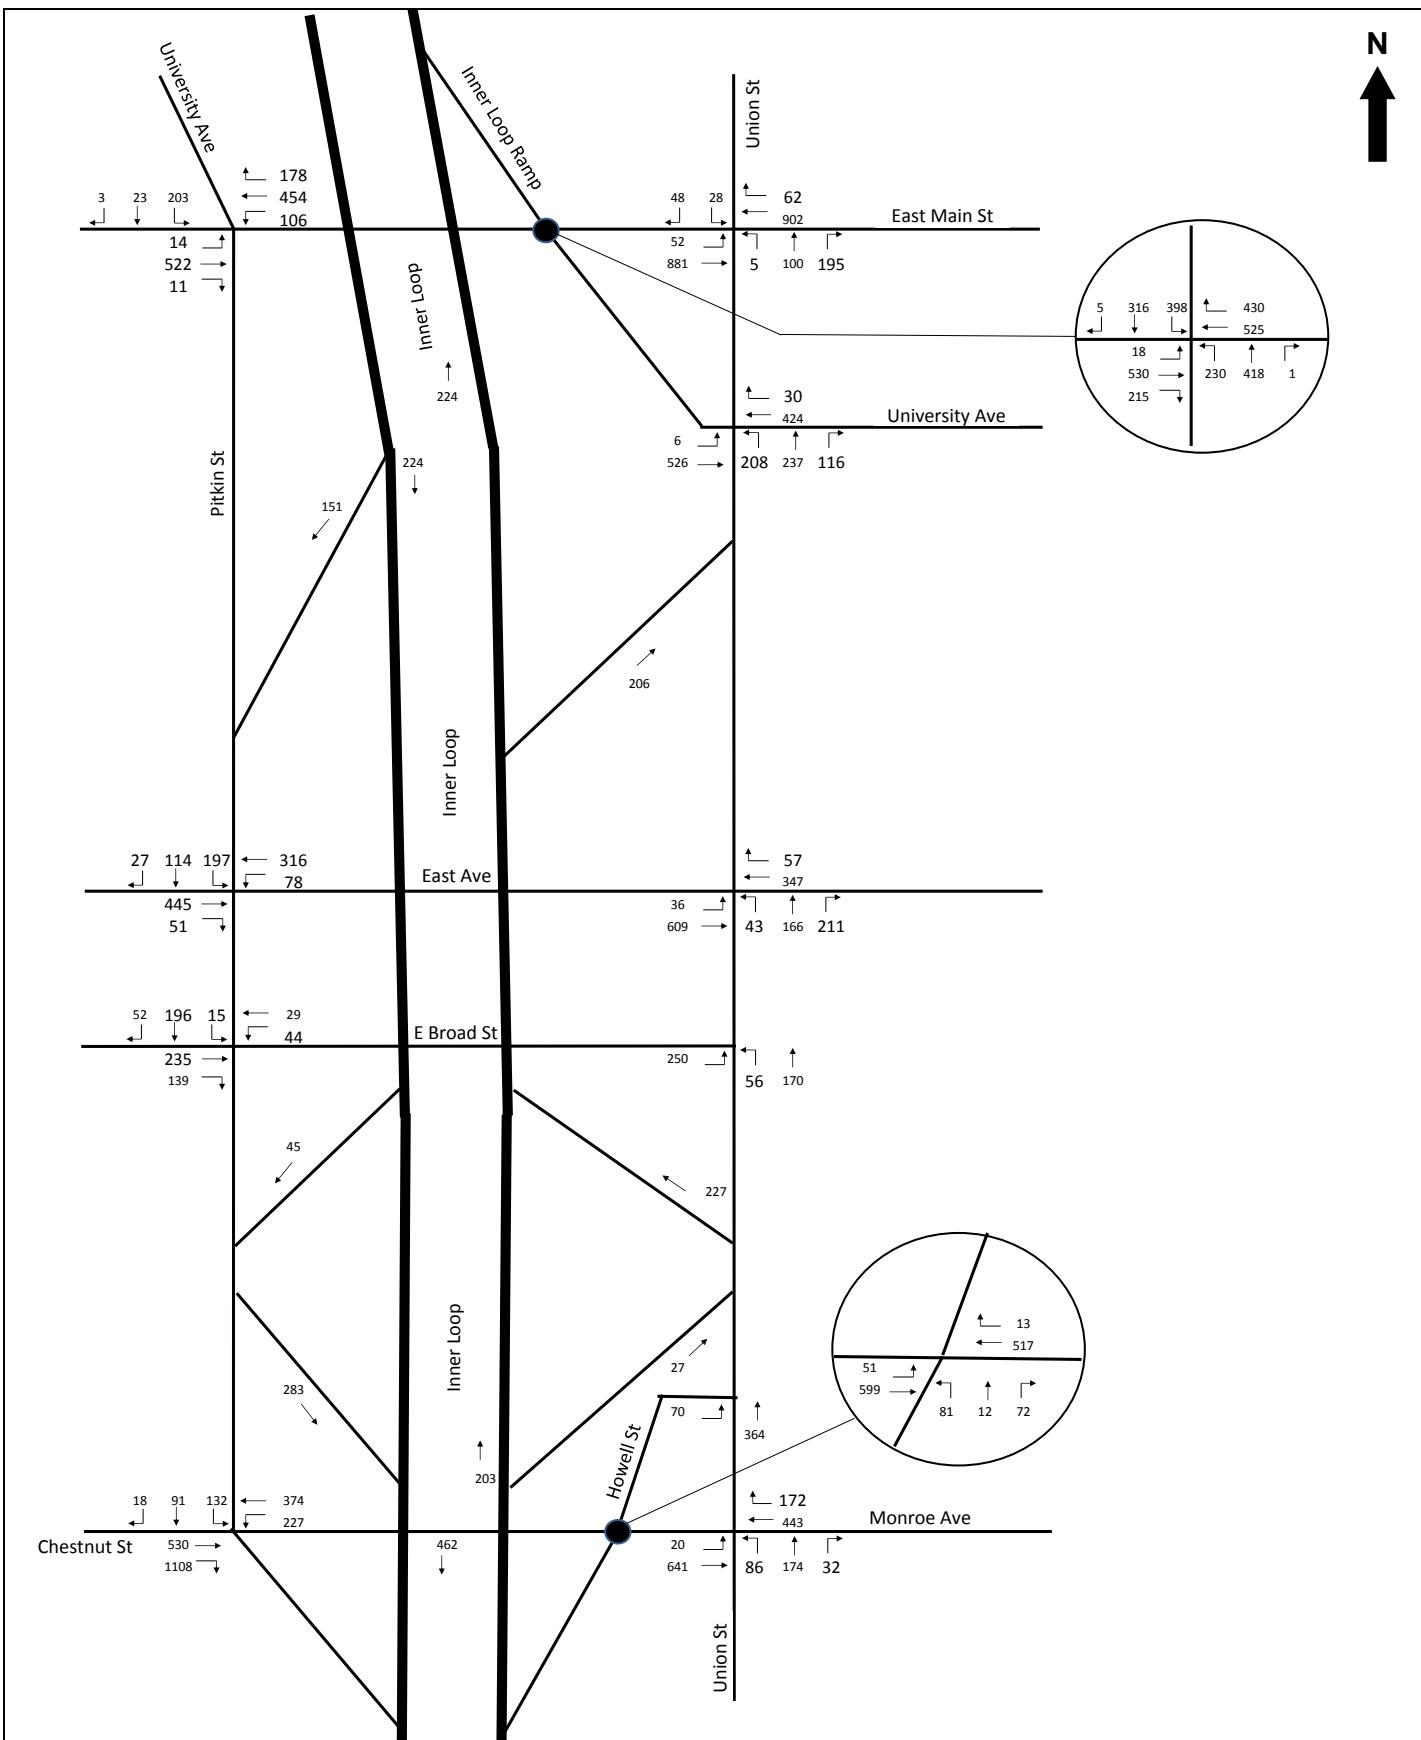

Lanes, Volumes, Timings  
2471: Monroe & IL EB

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑						↑↑			↑↑	
Volume (vph)	81	12	72	0	0	0	0	517	13	51	599	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	200		0	0		0	0		50	0		0
Storage Lanes	1		0	0		0	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.95	0.95	0.95	1.00
Frt			0.871					0.996				
Flt Protected	0.950										0.996	
Satd. Flow (prot)	1787	1639	0	0	0	0	0	3525	0	0	3525	0
Flt Permitted	0.950										0.871	
Satd. Flow (perm)	1787	1639	0	0	0	0	0	3525	0	0	3083	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)	90							3				
Link Speed (mph)	30			30				30			30	
Link Distance (ft)	324			342				410			178	
Travel Time (s)	7.4			7.8				9.3			4.0	
Peak Hour Factor	0.80	0.80	0.80	0.95	0.95	0.95	0.95	0.95	0.95	0.90	0.90	0.90
Heavy Vehicles (%)	1%	1%	1%	2%	2%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	101	15	90	0	0	0	0	544	14	57	666	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	101	105	0	0	0	0	0	558	0	0	723	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)	12			12				0			0	
Link Offset(ft)	0			0				0			0	
Crosswalk Width(ft)	16			16				16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1						1		1	1	
Detector Template												
Leading Detector (ft)	50	50						50		50	50	
Trailing Detector (ft)	0	0						0		0	0	
Detector 1 Position(ft)	0	0						0		0	0	
Detector 1 Size(ft)	50	50						50		50	50	
Detector 1 Type	Cl+Ex	Cl+Ex						Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0						0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0						0.0		0.0	0.0	
Turn Type	Split	NA						NA		pm+pt	NA	
Protected Phases	2	2						1		3	1 3	
Permitted Phases								1		1 3		
Detector Phase	2	2						1		3	1 3	
Switch Phase												
Minimum Initial (s)	6.0	6.0						7.0		6.0		
Minimum Split (s)	32.0	32.0						27.0		11.0		
Total Split (s)	33.0	33.0						50.0		17.0		



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (%)	33.0%	33.0%						50.0%		17.0%		
Maximum Green (s)	28.0	28.0						45.0		12.0		
Yellow Time (s)	4.0	4.0						4.0		4.0		
All-Red Time (s)	1.0	1.0						1.0		1.0		
Lost Time Adjust (s)	0.0	0.0						0.0				
Total Lost Time (s)	5.0	5.0						5.0				
Lead/Lag	Lag	Lag							Lead			
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0						2.0		3.0		
Recall Mode	Min	Min						C-Max		None		
Walk Time (s)	7.0	7.0						7.0				
Flash Dont Walk (s)	18.0	18.0						15.0				
Pedestrian Calls (#/hr)	0	0						0				
Act Effct Green (s)	12.7	12.7						58.3		72.3		
Actuated g/C Ratio	0.13	0.13						0.58		0.72		
v/c Ratio	0.45	0.37						0.27		0.32		
Control Delay	45.4	14.4						10.6		1.4		
Queue Delay	0.0	0.0						0.0		0.1		
Total Delay	45.4	14.4						10.6		1.5		
LOS	D	B						B		A		
Approach Delay	29.6							10.6		1.5		
Approach LOS	C							B		A		

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 65 (65%), Referenced to phase 1:NBSB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.45

Intersection Signal Delay: 8.8


Intersection LOS: A

Intersection Capacity Utilization 50.3%

ICU Level of Service A

Analysis Period (min) 15


Splits and Phases: 2471: Monroe & IL EB

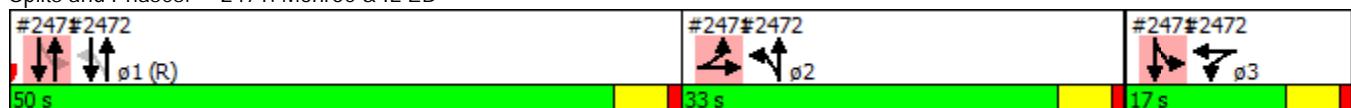

## Lanes, Volumes, Timings

2471: IL EB

1/7/2014




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	SEL	SET	SER	NWL	NWT	NWR
Lane Configurations												
Volume (vph)	197	20	144	0	0	0	26	315	0	0	519	1
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		200	0			0	0		0	0	50
Storage Lanes	0		1	0			0	0		1	0	1
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	0.95	0.95	1.00	1.00	1.00	1.00	0.95	0.95	1.00	1.00	0.95	0.95
Frt				0.850								
Flt Protected				0.957					0.996			
Satd. Flow (prot)	0	3259	1524	0	0	0	0	3457	0	0	3471	0
Flt Permitted				0.957					0.905			
Satd. Flow (perm)	0	3259	1524	0	0	0	0	3141	0	0	3471	0
Right Turn on Red				Yes			Yes		Yes			Yes
Satd. Flow (RTOR)				180								
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		768			258			174			411	
Travel Time (s)		17.5			5.9			4.0			9.3	
Peak Hour Factor	0.80	0.80	0.80	0.90	0.95	0.90	0.92	0.92	0.92	0.94	0.94	0.94
Heavy Vehicles (%)	6%	6%	6%	2%	2%	2%	4%	4%	4%	4%	4%	4%
Adj. Flow (vph)	246	25	180	0	0	0	28	342	0	0	552	1
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	271	180	0	0	0	0	370	0	0	553	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	1				1	2			2	
Detector Template	Left		Right				Left	Thru			Thru	
Leading Detector (ft)	20	50	20				20	100			100	
Trailing Detector (ft)	0	0	0				0	0			0	
Detector 1 Position(ft)	0	0	0				0	0			0	
Detector 1 Size(ft)	20	50	20				20	6			6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex				Cl+Ex	Cl+Ex			Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0				0.0	0.0			0.0	
Detector 1 Queue (s)	0.0	0.0	0.0				0.0	0.0			0.0	
Detector 1 Delay (s)	0.0	0.0	0.0				0.0	0.0			0.0	
Detector 2 Position(ft)								94			94	
Detector 2 Size(ft)								6			6	
Detector 2 Type							Cl+Ex			Cl+Ex		
Detector 2 Channel												
Detector 2 Extend (s)								0.0			0.0	
Turn Type	Split	NA	Perm				pm+pt	NA			NA	
Protected Phases	2	2					3	1 3			1	
Permitted Phases			2				1 3				1	

## Lanes, Volumes, Timings

2471: IL EB

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	SEL	SET	SER	NWL	NWT	NWR
Detector Phase	2	2	2				3	13			1	
Switch Phase												
Minimum Initial (s)	6.0	6.0	6.0				3.0				3.0	
Minimum Split (s)	32.0	32.0	32.0				25.0				25.0	
Total Split (s)	32.0	32.0	32.0				25.0				28.0	
Total Split (%)	37.6%	37.6%	37.6%				29.4%				32.9%	
Maximum Green (s)	27.0	27.0	27.0				20.0				23.0	
Yellow Time (s)	4.0	4.0	4.0				4.0				4.0	
All-Red Time (s)	1.0	1.0	1.0				1.0				1.0	
Lost Time Adjust (s)		0.0	0.0								0.0	
Total Lost Time (s)		5.0	5.0								5.0	
Lead/Lag	Lag	Lag	Lag								Lead	
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0	3.0				3.0				3.0	
Recall Mode	Min	Min	Min				None				C-Max	
Walk Time (s)	7.0	7.0	7.0				5.0				5.0	
Flash Dont Walk (s)	18.0	18.0	18.0				15.0				15.0	
Pedestrian Calls (#/hr)	0	0	0				0				0	
Act Effct Green (s)		12.6	12.6				57.4				48.9	
Actuated g/C Ratio		0.15	0.15				0.68				0.58	
v/c Ratio		0.98dl	0.48				0.17				0.28	
Control Delay		37.9	9.5				4.0				10.3	
Queue Delay		0.0	0.0				0.3				0.0	
Total Delay		37.9	9.5				4.3				10.3	
LOS		D	A				A				B	
Approach Delay		26.6					4.3				10.3	
Approach LOS		C					A				B	

## Intersection Summary

Area Type: Other

Cycle Length: 85

Actuated Cycle Length: 85

Offset: 73 (86%), Referenced to phase 1:NWSE, Start of Green

Natural Cycle: 85

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.56

Intersection Signal Delay: 14.0

Intersection LOS: B

Intersection Capacity Utilization 47.3%

ICU Level of Service A

Analysis Period (min) 15

dl Defacto Left Lane. Recode with 1 though lane as a left lane.


Splits and Phases: 2471: IL EB



# Lanes, Volumes, Timings

571:

1/7/2014




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	SBL	SBR	NWL	NWR
Lane Configurations										
Volume (vph)	0	0	0	87	36	57	255	253	145	568
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	0.91	0.91	0.91	0.97	0.88	1.00	0.95
Fr1						0.953		0.850	0.911	0.850
Flt Protected						0.976		0.950		0.980
Satd. Flow (prot)	0	0	0	0	4639	0	3400	2760	1631	1475
Flt Permitted						0.976		0.950		0.768
Satd. Flow (perm)	0	0	0	0	4639	0	3400	2760	1278	1475
Right Turn on Red				Yes		Yes		Yes		
Satd. Flow (RTOR)						71			269	
Link Speed (mph)		30				30		30		30
Link Distance (ft)		470				260		648		174
Travel Time (s)		10.7				5.9		14.7		4.0
Peak Hour Factor	0.90	0.90	0.90	0.80	0.80	0.80	0.94	0.94	0.88	0.88
Heavy Vehicles (%)	2%	2%	2%	4%	4%	4%	3%	3%	4%	4%
Adj. Flow (vph)	0	0	0	109	45	71	271	269	165	645
Shared Lane Traffic (%)										37%
Lane Group Flow (vph)	0	0	0	0	225	0	271	269	404	406
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Right	Left	Right
Median Width(ft)		0			0		36		12	
Link Offset(ft)		0			0		0		0	
Crosswalk Width(ft)		16			16		16		16	
Two way Left Turn Lane										
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	30	25	15	9
Number of Detectors			1	2			1	1	1	1
Detector Template			Left	Thru			Left	Right	Left	Right
Leading Detector (ft)		20	100			20	20	20	20	20
Trailing Detector (ft)		0	0			0	0	0	0	0
Detector 1 Position(ft)		0	0			0	0	0	0	0
Detector 1 Size(ft)		20	6			20	20	20	20	20
Detector 1 Type			Cl+Ex	Cl+Ex			Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel										
Detector 1 Extend (s)			0.0	0.0			0.0	0.0	0.0	0.0
Detector 1 Queue (s)			0.0	0.0			0.0	0.0	0.0	0.0
Detector 1 Delay (s)			0.0	0.0			0.0	0.0	0.0	0.0
Detector 2 Position(ft)				94						
Detector 2 Size(ft)				6						
Detector 2 Type				Cl+Ex						
Detector 2 Channel										
Detector 2 Extend (s)				0.0						
Turn Type			Split	NA			Prot	Free	D.P+P	pt+ov
Protected Phases			3	3			1		2	1 2
Permitted Phases								Free	1 2	
Detector Phase			3	3			1		2	1 2
Switch Phase										
Minimum Initial (s)			3.0	3.0			3.0		3.0	

# Lanes, Volumes, Timings

571:

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	SBL	SBR	NWL	NWR
Minimum Split (s)				25.0	25.0		25.0		25.0	
Total Split (s)				25.0	25.0		25.0		25.0	
Total Split (%)				33.3%	33.3%		33.3%		33.3%	
Maximum Green (s)				20.0	20.0		20.0		20.0	
Yellow Time (s)				3.0	3.0		3.0		3.0	
All-Red Time (s)				2.0	2.0		2.0		2.0	
Lost Time Adjust (s)				0.0		0.0		0.0		
Total Lost Time (s)					5.0		5.0		5.0	
Lead/Lag							Lead		Lag	
Lead-Lag Optimize?										
Vehicle Extension (s)				3.0	3.0		3.0		3.0	
Recall Mode				None	None		C-Max		Max	
Walk Time (s)				5.0	5.0		5.0		5.0	
Flash Dont Walk (s)				15.0	15.0		15.0		15.0	
Pedestrian Calls (#/hr)				0	0		0		0	
Act Effect Green (s)				7.9		32.1	75.0	52.1	57.1	
Actuated g/C Ratio					0.11		0.43	1.00	0.69	0.76
v/c Ratio					0.41		0.19	0.10	0.41	0.36
Control Delay					23.2		14.1	0.1	5.1	4.2
Queue Delay					0.0		0.0	0.0	3.0	7.4
Total Delay					23.2		14.1	0.1	8.1	11.6
LOS					C		B	A	A	B
Approach Delay					23.2		7.1		9.9	
Approach LOS					C		A		A	

## Intersection Summary

Area Type: Other

Cycle Length: 75

Actuated Cycle Length: 75

Offset: 65 (87%), Referenced to phase 1:NWSBL, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.41

Intersection Signal Delay: 10.8

Intersection LOS: B

Intersection Capacity Utilization 44.3%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 571:




Lanes, Volumes, Timings  
2472: Monroe & IL WB

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	0	0	0	132	91	18	227	374	0	0	530	1108
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	0.91	0.91	0.91	0.95	0.95	1.00	1.00	0.95	0.88
Fr <sub>t</sub>						0.989						0.850
Flt Protected						0.973			0.981			
Satd. Flow (prot)	0	0	0	0	4894	0	0	3472	0	0	3539	2787
Flt Permitted						0.973			0.615			
Satd. Flow (perm)	0	0	0	0	4894	0	0	2177	0	0	3539	2787
Right Turn on Red				Yes		Yes			Yes			Yes
Satd. Flow (RTOR)						11						1180
Link Speed (mph)		30				30			30			30
Link Distance (ft)		410				1028			178			627
Travel Time (s)		9.3				23.4			4.0			14.3
Peak Hour Factor	0.95	0.95	0.95	0.92	0.92	0.92	0.94	0.94	0.94	0.91	0.91	0.91
Adj. Flow (vph)	0	0	0	143	99	20	241	398	0	0	582	1218
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	0	0	262	0	0	639	0	0	582	1218
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)	0				0			12			12	
Link Offset(ft)	0				0			0			0	
Crosswalk Width(ft)	16				16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		25
Number of Detectors					1	1		1	1		1	1
Detector Template												
Leading Detector (ft)					50	50		50	50		50	50
Trailing Detector (ft)					0	0		0	0		0	0
Detector 1 Position(ft)					0	0		0	0		0	0
Detector 1 Size(ft)					50	50		50	50		50	50
Detector 1 Type					Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)					0.0	0.0		0.0	0.0		0.0	0.0
Detector 1 Queue (s)					0.0	0.0		0.0	0.0		0.0	0.0
Detector 1 Delay (s)					0.0	0.0		0.0	0.0		0.0	0.0
Turn Type					Split	NA		pm+pt	NA		NA	Free
Protected Phases					3	3		2	12		1	
Permitted Phases								12				Free
Detector Phase					3	3		2	12		1	
Switch Phase												
Minimum Initial (s)					6.0	6.0		6.0			7.0	
Minimum Split (s)					11.0	11.0		32.0			27.0	
Total Split (s)					17.0	17.0		33.0			50.0	
Total Split (%)					17.0%	17.0%		33.0%			50.0%	
Maximum Green (s)					12.0	12.0		28.0			45.0	
Yellow Time (s)					4.0	4.0		4.0			4.0	
All-Red Time (s)					1.0	1.0		1.0			1.0	



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lost Time Adjust (s)					0.0						0.0	
Total Lost Time (s)					5.0						5.0	
Lead/Lag							Lag				Lead	
Lead-Lag Optimize?												
Vehicle Extension (s)				3.0	3.0	3.0					2.0	
Recall Mode				None	None		Min				C-Max	
Walk Time (s)							7.0				7.0	
Flash Dont Walk (s)							18.0				15.0	
Pedestrian Calls (#/hr)							0				0	
Act Effct Green (s)					14.0		71.0				58.3	100.0
Actuated g/C Ratio					0.14		0.71				0.58	1.00
v/c Ratio					0.38		0.37				0.28	0.44
Control Delay					38.5		2.6				8.8	0.4
Queue Delay					0.0		0.0				0.0	0.0
Total Delay					38.5		2.6				8.8	0.4
LOS					D		A				A	A
Approach Delay					38.5		2.6				3.1	
Approach LOS					D		A				A	

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 65 (65%), Referenced to phase 1:NBSB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.45

Intersection Signal Delay: 6.4


Intersection LOS: A

Intersection Capacity Utilization 51.4%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2472: Monroe & IL WB

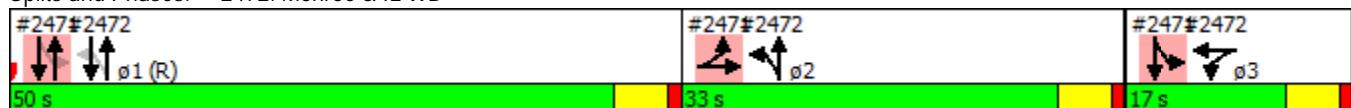

Lanes, Volumes, Timings  
246: Union & Monroe

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑			↑	↑	↑	↑↑				
Volume (vph)	27	452	0	0	443	132	77	295	22	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		50	250		250	0		0
Storage Lanes	1		0	0		1	1		0	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00
Frt					0.996	0.850			0.990			
Flt Protected	0.950							0.950				
Satd. Flow (prot)	1719	1810	0	0	1729	1475	1752	3470	0	0	0	0
Flt Permitted	0.312						0.950					
Satd. Flow (perm)	565	1810	0	0	1729	1475	1752	3470	0	0	0	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					3	88		9				
Link Speed (mph)	30				30			30			30	
Link Distance (ft)	236				714			600			597	
Travel Time (s)	5.4				16.2			13.6			13.6	
Peak Hour Factor	0.85	0.85	0.85	0.90	0.90	0.90	0.90	0.90	0.90	0.95	0.95	0.90
Heavy Vehicles (%)	5%	5%	5%	4%	4%	4%	3%	3%	3%	2%	2%	2%
Adj. Flow (vph)	32	532	0	0	492	147	86	328	24	0	0	0
Shared Lane Traffic (%)						10%						
Lane Group Flow (vph)	32	532	0	0	507	132	86	352	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2			2	1	1	1				
Detector Template	Left	Thru			Thru		Left					
Leading Detector (ft)	20	100			100	50	20	50				
Trailing Detector (ft)	0	0			0	0	0	0				
Detector 1 Position(ft)	0	0			0	0	0	0				
Detector 1 Size(ft)	20	6			6	50	20	50				
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex				
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0	0.0	0.0	0.0				
Detector 1 Queue (s)	0.0	0.0			0.0	0.0	0.0	0.0				
Detector 1 Delay (s)	0.0	0.0			0.0	0.0	0.0	0.0				
Detector 2 Position(ft)		94			94							
Detector 2 Size(ft)		6			6							
Detector 2 Type		Cl+Ex			Cl+Ex							
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0							
Turn Type	D.Pm	NA			NA	Perm	Perm	NA				
Protected Phases					4			2				
Permitted Phases	4	4			4	2						

# Lanes, Volumes, Timings

246: Union & Monroe

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Detector Phase	4	4			4	4	2	2				
Switch Phase												
Minimum Initial (s)	3.0	3.0			3.0	3.0	9.0	9.0				
Minimum Split (s)	25.0	25.0			25.0	25.0	22.0	22.0				
Total Split (s)	52.0	52.0			52.0	52.0	28.0	28.0				
Total Split (%)	65.0%	65.0%			65.0%	65.0%	35.0%	35.0%				
Maximum Green (s)	47.0	47.0			47.0	47.0	23.0	23.0				
Yellow Time (s)	5.0	5.0			5.0	5.0	4.0	4.0				
All-Red Time (s)	0.0	0.0			0.0	0.0	1.0	1.0				
Lost Time Adjust (s)	0.0	0.0			0.0	0.0	0.0	0.0				
Total Lost Time (s)	5.0	5.0			5.0	5.0	5.0	5.0				
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0			3.0	3.0	4.0	4.0				
Recall Mode	None	None			None	None	Max	Max				
Walk Time (s)	5.0	5.0			5.0	5.0	7.0	7.0				
Flash Dont Walk (s)	15.0	15.0			15.0	15.0	8.0	8.0				
Pedestrian Calls (#/hr)	0	0			0	0	0	0				
Act Effct Green (s)	27.9	27.9			27.9	27.9	23.7	23.7				
Actuated g/C Ratio	0.45	0.45			0.45	0.45	0.38	0.38				
v/c Ratio	0.13	0.65			0.65	0.19	0.13	0.26				
Control Delay	9.7	16.5			16.5	4.2	17.2	16.1				
Queue Delay	0.0	0.0			0.0	0.0	0.0	0.0				
Total Delay	9.7	16.5			16.5	4.2	17.2	16.1				
LOS	A	B			B	A	B	B				
Approach Delay		16.1			13.9			16.3				
Approach LOS		B			B			B				

## Intersection Summary

Area Type: Other

Cycle Length: 80

Actuated Cycle Length: 61.9

Natural Cycle: 50

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 0.65

Intersection Signal Delay: 15.3

Intersection LOS: B

Intersection Capacity Utilization 43.2%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 246: Union & Monroe



Lanes, Volumes, Timings  
246: Union & Monroe

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	20	641	0	0	443	172	86	174	32	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		0	250		250	0		0
Storage Lanes	1		0	0		0	1		0	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.95	1.00	1.00	1.00
Frt					0.962			0.977				
Flt Protected	0.950						0.950					
Satd. Flow (prot)	1787	1881	0	0	1810	0	1752	3424	0	0	0	0
Flt Permitted	0.346						0.950					
Satd. Flow (perm)	651	1881	0	0	1810	0	1752	3424	0	0	0	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					42			19				
Link Speed (mph)	30				30			30			30	
Link Distance (ft)	236				685			470			510	
Travel Time (s)	5.4				15.6			10.7			11.6	
Peak Hour Factor	0.92	0.92	0.92	0.87	0.87	0.87	0.86	0.86	0.86	0.95	0.95	0.95
Heavy Vehicles (%)	1%	1%	1%	1%	1%	1%	3%	3%	3%	2%	2%	2%
Adj. Flow (vph)	22	697	0	0	509	198	100	202	37	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	22	697	0	0	707	0	100	239	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1			1		1	1				
Detector Template												
Leading Detector (ft)	50	50			50		50	50				
Trailing Detector (ft)	0	0			0		0	0				
Detector 1 Position(ft)	0	0			0		0	0				
Detector 1 Size(ft)	50	50			50		50	50				
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex		Cl+Ex	Cl+Ex				
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0		0.0	0.0				
Detector 1 Queue (s)	0.0	0.0			0.0		0.0	0.0				
Detector 1 Delay (s)	0.0	0.0			0.0		0.0	0.0				
Turn Type	Perm	NA			NA		Split	NA				
Protected Phases		1			1		2	2				
Permitted Phases	1											
Detector Phase	1	1			1		2	2				
Switch Phase												
Minimum Initial (s)	7.0	7.0			7.0		9.0	9.0				
Minimum Split (s)	23.0	23.0			23.0		22.0	22.0				
Total Split (s)	72.0	72.0			72.0		28.0	28.0				



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (%)	72.0%	72.0%			72.0%		28.0%	28.0%				
Maximum Green (s)	67.0	67.0			67.0		23.0	23.0				
Yellow Time (s)	4.0	4.0			4.0		4.0	4.0				
All-Red Time (s)	1.0	1.0			1.0		1.0	1.0				
Lost Time Adjust (s)	0.0	0.0			0.0		0.0	0.0				
Total Lost Time (s)	5.0	5.0			5.0		5.0	5.0				
Lead/Lag	Lead	Lead			Lead		Lag	Lag				
Lead-Lag Optimize?												
Vehicle Extension (s)	2.0	2.0			2.0		4.0	4.0				
Recall Mode	C-Max	C-Max			C-Max		None	None				
Walk Time (s)	7.0	7.0			7.0		7.0	7.0				
Flash Dont Walk (s)	11.0	11.0			11.0		8.0	8.0				
Pedestrian Calls (#/hr)	0	0			0		0	0				
Act Effct Green (s)	77.1	77.1			77.1		12.9	12.9				
Actuated g/C Ratio	0.77	0.77			0.77		0.13	0.13				
v/c Ratio	0.04	0.48			0.50		0.44	0.52				
Control Delay	3.0	7.2			3.9		45.8	41.0				
Queue Delay	0.0	0.4			0.1		0.0	0.0				
Total Delay	3.0	7.5			4.0		45.8	41.0				
LOS	A	A			A		D	D				
Approach Delay		7.4			4.0			42.5				
Approach LOS		A			A			D				

**Intersection Summary**

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 97 (97%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 60

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.52

Intersection Signal Delay: 12.8

Intersection LOS: B

Intersection Capacity Utilization 49.6%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 246: Union &amp; Monroe





Lane Group	EBL	EBR	NBL	NBT	SBT	SBR	ø2
Lane Configurations	↑↑		↑	↑↑			
Volume (vph)	70	0	136	154	0	0	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Storage Length (ft)	0	0	200			0	
Storage Lanes	2	0	1			0	
Taper Length (ft)	25		25				
Lane Util. Factor	0.97	1.00	1.00	0.95	1.00	1.00	
Frt							
Flt Protected	0.950		0.950				
Satd. Flow (prot)	3367	0	1770	3539	0	0	
Flt Permitted	0.950		0.950				
Satd. Flow (perm)	3367	0	1770	3539	0	0	
Right Turn on Red		Yes			Yes		
Satd. Flow (RTOR)							
Link Speed (mph)	30		30	30			
Link Distance (ft)	136		556	451			
Travel Time (s)	3.1		12.6	10.3			
Peak Hour Factor	0.90	0.90	0.95	0.95	0.90	0.90	
Heavy Vehicles (%)	4%	4%	2%	2%	2%	2%	
Adj. Flow (vph)	78	0	143	162	0	0	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	78	0	143	162	0	0	
Enter Blocked Intersection	No	No	No	No	No	No	
Lane Alignment	Left	Right	Left	Left	Left	Right	
Median Width(ft)	24		12	12			
Link Offset(ft)	0		0	0			
Crosswalk Width(ft)	16		16	16			
Two way Left Turn Lane							
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15	9	15			9	
Number of Detectors	1		1	1			
Detector Template							
Leading Detector (ft)	50		50	50			
Trailing Detector (ft)	0		0	0			
Detector 1 Position(ft)	0		0	0			
Detector 1 Size(ft)	50		50	50			
Detector 1 Type	Cl+Ex		Cl+Ex	Cl+Ex			
Detector 1 Channel							
Detector 1 Extend (s)	0.0		0.0	0.0			
Detector 1 Queue (s)	0.0		0.0	0.0			
Detector 1 Delay (s)	0.0		0.0	0.0			
Turn Type	Prot		Prot	NA			
Protected Phases	1		3	2 3		2	
Permitted Phases							
Detector Phase	1		3	2 3			
Switch Phase							
Minimum Initial (s)	7.0		6.0			10.0	
Minimum Split (s)	21.0		24.0			28.0	
Total Split (s)	22.0		39.0			39.0	



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR	Ø2
Total Split (%)	22.0%		39.0%				39%
Maximum Green (s)	16.0		34.0				34.0
Yellow Time (s)	4.0		4.0				4.0
All-Red Time (s)	2.0		1.0				1.0
Lost Time Adjust (s)	0.0		0.0				
Total Lost Time (s)	6.0		5.0				
Lead/Lag	Lead						Lag
Lead-Lag Optimize?							
Vehicle Extension (s)	2.0		4.0				3.0
Recall Mode	C-Max		None				None
Walk Time (s)	7.0						7.0
Flash Dont Walk (s)	8.0						15.0
Pedestrian Calls (#/hr)	0						0
Act Effct Green (s)	57.9		14.9	31.1			
Actuated g/C Ratio	0.58		0.15	0.31			
v/c Ratio	0.04		0.54	0.15			
Control Delay	1.5		46.3	23.8			
Queue Delay	0.4		0.0	0.0			
Total Delay	1.9		46.3	23.8			
LOS	A		D	C			
Approach Delay	1.9			34.3			
Approach LOS	A			C			

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 54 (54%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.57

Intersection Signal Delay: 27.7

Intersection LOS: C

Intersection Capacity Utilization 23.3%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2592: Union & Broad





Lane Group	EBL	EBR	NBL	NBT	SBT	SBR	ø2
Lane Configurations	↔	→	↔	↑	↓	↔	
Volume (vph)	250	0	56	170	0	0	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Storage Length (ft)	0	0	200			0	
Storage Lanes	2	0	1			0	
Taper Length (ft)	25		25				
Lane Util. Factor	0.97	1.00	1.00	0.95	1.00	1.00	
Frt							
Flt Protected	0.950		0.950				
Satd. Flow (prot)	3433	0	1787	3574	0	0	
Flt Permitted	0.950		0.950				
Satd. Flow (perm)	3433	0	1787	3574	0	0	
Right Turn on Red		Yes			Yes		
Satd. Flow (RTOR)							
Link Speed (mph)	30		30	30			
Link Distance (ft)	175		499	451			
Travel Time (s)	4.0		11.3	10.3			
Peak Hour Factor	0.88	0.88	0.86	0.86	0.90	0.90	
Heavy Vehicles (%)	2%	2%	1%	1%	2%	2%	
Adj. Flow (vph)	284	0	65	198	0	0	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	284	0	65	198	0	0	
Enter Blocked Intersection	No	No	No	No	No	No	
Lane Alignment	Left	Right	Left	Left	Left	Right	
Median Width(ft)	24		12	12			
Link Offset(ft)	0		0	0			
Crosswalk Width(ft)	16		16	16			
Two way Left Turn Lane							
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15	9	15			9	
Number of Detectors	1		1	1			
Detector Template							
Leading Detector (ft)	50		50	50			
Trailing Detector (ft)	0		0	0			
Detector 1 Position(ft)	0		0	0			
Detector 1 Size(ft)	50		50	50			
Detector 1 Type	Cl+Ex		Cl+Ex	Cl+Ex			
Detector 1 Channel							
Detector 1 Extend (s)	0.0		0.0	0.0			
Detector 1 Queue (s)	0.0		0.0	0.0			
Detector 1 Delay (s)	0.0		0.0	0.0			
Turn Type	Prot		Prot	NA			
Protected Phases	1		3	2 3		2	
Permitted Phases							
Detector Phase	1		3	2 3			
Switch Phase							
Minimum Initial (s)	7.0		6.0			10.0	
Minimum Split (s)	21.0		24.0			28.0	
Total Split (s)	31.0		24.0			45.0	



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR	ø2
Total Split (%)	31.0%		24.0%				45%
Maximum Green (s)	25.0		19.0				40.0
Yellow Time (s)	4.0		4.0				4.0
All-Red Time (s)	2.0		1.0				1.0
Lost Time Adjust (s)	0.0		0.0				
Total Lost Time (s)	6.0		5.0				
Lead/Lag	Lead						Lag
Lead-Lag Optimize?							
Vehicle Extension (s)	2.0		4.0				3.0
Recall Mode	C-Max		None				None
Walk Time (s)	7.0						7.0
Flash Dont Walk (s)	8.0						15.0
Pedestrian Calls (#/hr)	0						0
Act Effct Green (s)	62.3		10.1	26.7			
Actuated g/C Ratio	0.62		0.10	0.27			
v/c Ratio	0.13		0.36	0.21			
Control Delay	3.3		46.5	28.0			
Queue Delay	0.4		0.0	0.0			
Total Delay	3.7		46.5	28.0			
LOS	A		D	C			
Approach Delay	3.7			32.6			
Approach LOS	A			C			

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 25 (25%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.51

Intersection Signal Delay: 17.6

Intersection LOS: B

Intersection Capacity Utilization 24.6%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2592: Union & Broad





Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	0	67	31	23	115	0	0	0	0	3	156	177
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	0.91	0.91	0.91
Fr <sub>t</sub>						0.850						0.921
Flt Protected						0.992						
Satd. Flow (prot)	0	3471	1553	0	3511	0	0	0	0	0	4684	0
Flt Permitted						0.918						
Satd. Flow (perm)	0	3471	1553	0	3249	0	0	0	0	0	4684	0
Right Turn on Red				Yes		Yes			Yes			Yes
Satd. Flow (RTOR)				76								216
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		786			136			477			435	
Travel Time (s)		17.9			3.1			10.8			9.9	
Peak Hour Factor	0.78	0.78	0.78	0.85	0.85	0.85	0.90	0.90	0.90	0.82	0.82	0.82
Heavy Vehicles (%)	4%	4%	4%	2%	2%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	0	86	40	27	135	0	0	0	0	4	190	216
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	86	40	0	162	0	0	0	0	0	410	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)	0				0			0			0	
Link Offset(ft)	0				0			0			0	
Crosswalk Width(ft)	16				16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	1	1						1	1	
Detector Template												
Leading Detector (ft)	50	50	50	50						50	50	
Trailing Detector (ft)	0	0	0	0						0	0	
Detector 1 Position(ft)	0	0	0	0						0	0	
Detector 1 Size(ft)	50	50	50	50						50	50	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex						Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0						0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0						0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0						0.0	0.0	
Turn Type	NA	Perm	D.P+P	NA						Split	NA	
Protected Phases	1		3	1 3						2	2	
Permitted Phases		1	1									
Detector Phase	1	1	3	1 3						2	2	
Switch Phase												
Minimum Initial (s)	7.0	7.0	6.0							10.0	10.0	
Minimum Split (s)	21.0	21.0	24.0							28.0	28.0	
Total Split (s)	22.0	22.0	39.0							39.0	39.0	
Total Split (%)	22.0%	22.0%	39.0%							39.0%	39.0%	
Maximum Green (s)	16.0	16.0	34.0							34.0	34.0	
Yellow Time (s)	4.0	4.0	4.0							4.0	4.0	



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
All-Red Time (s)	2.0	2.0	1.0							1.0	1.0	
Lost Time Adjust (s)	0.0	0.0									0.0	
Total Lost Time (s)	6.0	6.0									5.0	
Lead/Lag	Lead	Lead								Lag	Lag	
Lead-Lag Optimize?												
Vehicle Extension (s)	2.0	2.0	4.0							3.0	3.0	
Recall Mode	C-Max	C-Max	None							None	None	
Walk Time (s)	7.0	7.0								7.0	7.0	
Flash Dont Walk (s)	8.0	8.0								15.0	15.0	
Pedestrian Calls (#/hr)	0	0								0	0	
Act Effect Green (s)	57.9	57.9	71.8							11.2		
Actuated g/C Ratio	0.58	0.58	0.72							0.11		
v/c Ratio	0.04	0.04	0.07							0.57		
Control Delay	5.6	2.2	0.5							11.1		
Queue Delay	0.0	0.0	0.2							0.0		
Total Delay	5.6	2.2	0.7							11.1		
LOS	A	A	A							B		
Approach Delay	4.5		0.7							11.1		
Approach LOS	A		A							B		

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 54 (54%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.57

Intersection Signal Delay: 7.5

Intersection LOS: A

Intersection Capacity Utilization 34.2%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2591: Pitkin & Broad



Lanes, Volumes, Timings  
2591: Pitkin & Broad


1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations													
Volume (vph)	0	235	139	44	29	0	0	0	0	15	196	52	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	
Lane Util. Factor	1.00	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	0.91	0.91	0.91	
Fr <sub>t</sub>						0.850						0.970	
Flt Protected							0.971					0.997	
Satd. Flow (prot)	0	3539	1583	0	3437	0	0	0	0	0	4918	0	
Flt Permitted						0.737						0.997	
Satd. Flow (perm)	0	3539	1583	0	2608	0	0	0	0	0	4918	0	
Right Turn on Red				Yes		Yes				Yes		Yes	
Satd. Flow (RTOR)				185								63	
Link Speed (mph)		30			30			30				30	
Link Distance (ft)		750			175			248				439	
Travel Time (s)		17.0			4.0			5.6				10.0	
Peak Hour Factor	0.75	0.75	0.75	0.77	0.77	0.77	0.90	0.90	0.90	0.82	0.82	0.82	
Adj. Flow (vph)	0	313	185	57	38	0	0	0	0	18	239	63	
Shared Lane Traffic (%)													
Lane Group Flow (vph)	0	313	185	0	95	0	0	0	0	0	320	0	
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No	
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right	
Median Width(ft)		0			0			0				0	
Link Offset(ft)		0			0			0				0	
Crosswalk Width(ft)		16			16			16				16	
Two way Left Turn Lane													
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15		9	15		9	15		9	15		9	
Number of Detectors		1	1	1	1						1	1	
Detector Template													
Leading Detector (ft)		50	50	50	50						50	50	
Trailing Detector (ft)		0	0	0	0						0	0	
Detector 1 Position(ft)		0	0	0	0						0	0	
Detector 1 Size(ft)		50	50	50	50						50	50	
Detector 1 Type		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex						Cl+Ex	Cl+Ex	
Detector 1 Channel													
Detector 1 Extend (s)		0.0	0.0	0.0	0.0						0.0	0.0	
Detector 1 Queue (s)		0.0	0.0	0.0	0.0						0.0	0.0	
Detector 1 Delay (s)		0.0	0.0	0.0	0.0						0.0	0.0	
Turn Type		NA	Perm	D.P+P	NA						Split	NA	
Protected Phases		1		3	1 3						2	2	
Permitted Phases			1	1									
Detector Phase		1	1	3	1 3						2	2	
Switch Phase													
Minimum Initial (s)		7.0	7.0	6.0							10.0	10.0	
Minimum Split (s)		21.0	21.0	24.0							28.0	28.0	
Total Split (s)		31.0	31.0	24.0							45.0	45.0	
Total Split (%)		31.0%	31.0%	24.0%							45.0%	45.0%	
Maximum Green (s)		25.0	25.0	19.0							40.0	40.0	
Yellow Time (s)		4.0	4.0	4.0							4.0	4.0	
All-Red Time (s)		2.0	2.0	1.0							1.0	1.0	

## Lanes, Volumes, Timings

2591: Pitkin & Broad

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lost Time Adjust (s)		0.0	0.0							0.0		
Total Lost Time (s)		6.0	6.0							5.0		
Lead/Lag		Lead	Lead							Lag	Lag	
Lead-Lag Optimize?												
Vehicle Extension (s)		2.0	2.0	4.0						3.0	3.0	
Recall Mode	C-Max	C-Max	None							None	None	
Walk Time (s)		7.0	7.0							7.0	7.0	
Flash Dont Walk (s)		8.0	8.0							15.0	15.0	
Pedestrian Calls (#/hr)		0	0							0	0	
Act Effct Green (s)	62.3	62.3		71.4						11.6		
Actuated g/C Ratio	0.62	0.62		0.71						0.12		
v/c Ratio	0.14	0.18		0.05						0.51		
Control Delay	5.9	0.6		1.1						31.3		
Queue Delay	0.0	0.0		0.1						0.0		
Total Delay	5.9	0.6		1.2						31.3		
LOS	A	A		A						C		
Approach Delay	3.9			1.2						31.3		
Approach LOS	A			A						C		

## Intersection Summary

**Area Type:** Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 25 (25%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.51

Intersection Signal Delay: 13.2

Intersection Capacity Utilization 36.9%

## Intersection Capacity Utilization Analysis Period (min) 15

Analisis Periodik (W.M.) 18

Splits and Phases: 2591: Pitkin & Broad

#259#2592 #259#2592

1

31s

Lanes, Volumes, Timings  
2602: Union & East

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	24	332	0	0	450	67	68	84	65	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	0.95	0.95	1.00	1.00	0.95	0.95	0.95	0.95	1.00	1.00	1.00	1.00
Frt						0.981				0.850		
Flt Protected					0.997					0.978		
Satd. Flow (prot)	0	3461	0	0	3405	0	0	3362	1538	0	0	0
Flt Permitted					0.906				0.978			
Satd. Flow (perm)	0	3145	0	0	3405	0	0	3362	1538	0	0	0
Right Turn on Red				Yes			Yes			Yes		Yes
Satd. Flow (RTOR)						22				87		
Link Speed (mph)			30			30			30		30	
Link Distance (ft)			123			667			451		780	
Travel Time (s)			2.8			15.2			10.3		17.7	
Peak Hour Factor	0.76	0.76	0.76	0.93	0.93	0.93	0.94	0.94	0.94	0.90	0.90	0.90
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%	5%	5%	5%	2%	2%	2%
Adj. Flow (vph)	32	437	0	0	484	72	72	89	69	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	469	0	0	556	0	0	161	69	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1			1		1	1	1			
Detector Template												
Leading Detector (ft)	50	50			50		50	50	50			
Trailing Detector (ft)	0	0			0		0	0	0			
Detector 1 Position(ft)	0	0			0		0	0	0			
Detector 1 Size(ft)	50	50			50		50	50	50			
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex			
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0		0.0	0.0	0.0			
Detector 1 Queue (s)	0.0	0.0			0.0		0.0	0.0	0.0			
Detector 1 Delay (s)	0.0	0.0			0.0		0.0	0.0	0.0			
Turn Type	pm+pt	NA			NA		Split	NA	Perm			
Protected Phases	2	1 2			1		3	3				
Permitted Phases	1 2								3			
Detector Phase	2	1 2			1		3	3	3			
Switch Phase												
Minimum Initial (s)	6.0				6.0		6.0	6.0	6.0			
Minimum Split (s)	23.0				23.0		22.0	22.0	22.0			
Total Split (s)	26.0				52.0		22.0	22.0	22.0			
Total Split (%)	26.0%				52.0%		22.0%	22.0%	22.0%			
Maximum Green (s)	20.5				46.5		16.5	16.5	16.5			
Yellow Time (s)	3.5				3.5		3.5	3.5	3.5			

# Lanes, Volumes, Timings

2602: Union & East

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
All-Red Time (s)	2.0				2.0		2.0	2.0	2.0			
Lost Time Adjust (s)					0.0			0.0	0.0			
Total Lost Time (s)					5.5			5.5	5.5			
Lead/Lag	Lag					Lead						
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0				2.0		3.0	3.0	3.0			
Recall Mode	None				C-Max		None	None	None			
Walk Time (s)	7.0				7.0		7.0	7.0	7.0			
Flash Dont Walk (s)	9.0				10.0		9.0	9.0	9.0			
Pedestrian Calls (#/hr)	0				0		0	0	0			
Act Effct Green (s)	71.4				54.0			12.1	12.1			
Actuated g/C Ratio	0.71				0.54			0.12	0.12			
v/c Ratio	0.20				0.30			0.40	0.26			
Control Delay	1.1				6.4			33.3	8.5			
Queue Delay	0.5				0.0			0.0	0.0			
Total Delay	1.6				6.4			33.3	8.5			
LOS	A				A			C	A			
Approach Delay	1.6				6.4			25.8				
Approach LOS	A				A			C				

## Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 16 (16%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.71

Intersection Signal Delay: 8.2


Intersection LOS: A

Intersection Capacity Utilization 41.5%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2602: Union & East

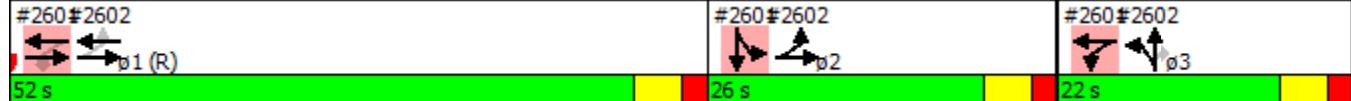

Lanes, Volumes, Timings  
2602: Union & East

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	36	609	0	0	347	57	43	166	211	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	0.95	0.95	1.00	1.00	0.95	0.95	0.95	0.95	1.00	1.00	1.00	1.00
Frt						0.979				0.850		
Flt Protected		0.997							0.990			
Satd. Flow (prot)	0	3529	0	0	3431	0	0	3504	1583	0	0	0
Flt Permitted		0.914							0.990			
Satd. Flow (perm)	0	3235	0	0	3431	0	0	3504	1583	0	0	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					19				234			
Link Speed (mph)		30			30			30		30		
Link Distance (ft)		148			667			451		567		
Travel Time (s)		3.4			15.2			10.3		12.9		
Peak Hour Factor	0.86	0.86	0.86	0.87	0.87	0.87	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	2%	2%	2%	3%	3%	3%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	42	708	0	0	399	66	48	184	234	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	750	0	0	465	0	0	232	234	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)	0				0			0		0		
Link Offset(ft)	0				0			0		0		
Crosswalk Width(ft)	16				16			16		16		
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1			1		1	1	1			
Detector Template												
Leading Detector (ft)	50	50			50		50	50	50			
Trailing Detector (ft)	0	0			0		0	0	0			
Detector 1 Position(ft)	0	0			0		0	0	0			
Detector 1 Size(ft)	50	50			50		50	50	50			
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex			
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0		0.0	0.0	0.0			
Detector 1 Queue (s)	0.0	0.0			0.0		0.0	0.0	0.0			
Detector 1 Delay (s)	0.0	0.0			0.0		0.0	0.0	0.0			
Turn Type	pm+pt	NA			NA		Split	NA	Perm			
Protected Phases	2	1 2			1		3	3				
Permitted Phases	1 2								3			
Detector Phase	2	1 2			1		3	3	3			
Switch Phase												
Minimum Initial (s)	6.0				6.0		6.0	6.0	6.0			
Minimum Split (s)	23.0				23.0		22.0	22.0	22.0			
Total Split (s)	36.0				35.0		29.0	29.0	29.0			
Total Split (%)	36.0%				35.0%		29.0%	29.0%	29.0%			
Maximum Green (s)	30.5				29.5		23.5	23.5	23.5			
Yellow Time (s)	3.5				3.5		3.5	3.5	3.5			

# Lanes, Volumes, Timings

2602: Union & East

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
All-Red Time (s)	2.0			2.0			2.0	2.0	2.0			
Lost Time Adjust (s)					0.0			0.0	0.0			
Total Lost Time (s)					5.5			5.5	5.5			
Lead/Lag	Lag					Lead						
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0				2.0		3.0	3.0	3.0			
Recall Mode	None				C-Max		None	None	None			
Walk Time (s)	7.0				7.0		7.0	7.0	7.0			
Flash Dont Walk (s)	9.0				10.0		9.0	9.0	9.0			
Pedestrian Calls (#/hr)	0				0		0	0	0			
Act Effct Green (s)	69.7				49.1			13.8	13.8			
Actuated g/C Ratio	0.70				0.49			0.14	0.14			
v/c Ratio	0.32				0.27			0.48	0.56			
Control Delay	1.1				23.9			39.5	11.9			
Queue Delay	0.1				0.0			0.0	0.0			
Total Delay	1.2				23.9			39.5	11.9			
LOS	A				C			D	B			
Approach Delay	1.2				23.9			25.7				
Approach LOS	A				C			C				

## Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 94 (94%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.61

Intersection Signal Delay: 14.2

Intersection LOS: B

Intersection Capacity Utilization 48.9%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2602: Union & East



Lanes, Volumes, Timings  
2601: Pitkin & East

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	0	189	30	138	353	0	0	0	0	171	168	29
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		125	0		0	0	0	0	0	0	0
Storage Lanes	0		1	0		0	0	0	0	1	0	0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	0.95	0.95
Frt				0.850							0.978	
Flt Protected					0.986						0.950	
Satd. Flow (prot)	0	3471	1553	0	3423	0	0	0	0	1736	3395	0
Flt Permitted					0.790						0.950	
Satd. Flow (perm)	0	3471	1553	0	2742	0	0	0	0	1736	3395	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			87									18
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		788			123			435			516	
Travel Time (s)		17.9			2.8			9.9			11.7	
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.90	0.90	0.90	0.80	0.80	0.80
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%	2%	2%	2%	4%	4%	4%
Adj. Flow (vph)	0	199	32	145	372	0	0	0	0	214	210	36
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	199	32	0	517	0	0	0	0	214	246	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors		1	1	1	1					1	1	
Detector Template												
Leading Detector (ft)		50	50	50	50					50	50	
Trailing Detector (ft)		0	0	0	0					0	0	
Detector 1 Position(ft)		0	0	0	0					0	0	
Detector 1 Size(ft)		50	50	50	50					50	50	
Detector 1 Type		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex					Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Detector 1 Queue (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Detector 1 Delay (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Turn Type	NA	Perm	pm+pt	NA						Split	NA	
Protected Phases	1		3	1 3						2	2	
Permitted Phases		1	1	3	1 3					2	2	
Detector Phase		1	1	3	1 3					2	2	
Switch Phase												
Minimum Initial (s)		6.0	6.0	6.0						6.0	6.0	
Minimum Split (s)		23.0	23.0	22.0						23.0	23.0	
Total Split (s)		52.0	52.0	22.0						26.0	26.0	

# Lanes, Volumes, Timings

2601: Pitkin & East

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (%)	52.0%	52.0%	22.0%							26.0%	26.0%	
Maximum Green (s)	46.5	46.5	16.5							20.5	20.5	
Yellow Time (s)	3.5	3.5	3.5							3.5	3.5	
All-Red Time (s)	2.0	2.0	2.0							2.0	2.0	
Lost Time Adjust (s)	0.0	0.0								0.0	0.0	
Total Lost Time (s)	5.5	5.5								5.5	5.5	
Lead/Lag	Lead	Lead								Lag	Lag	
Lead-Lag Optimize?												
Vehicle Extension (s)	2.0	2.0	3.0							3.0	3.0	
Recall Mode	C-Max	C-Max	None							None	None	
Walk Time (s)	7.0	7.0	7.0							7.0	7.0	
Flash Dont Walk (s)	10.0	10.0	9.0							9.0	9.0	
Pedestrian Calls (#/hr)	0	0	0							0	0	
Act Effct Green (s)	54.0	54.0		66.1						17.4	17.4	
Actuated g/C Ratio	0.54	0.54		0.66						0.17	0.17	
v/c Ratio	0.11	0.04		0.27						0.71	0.41	
Control Delay	12.5	2.0		1.1						52.0	35.9	
Queue Delay	0.0	0.0		0.2						0.0	0.0	
Total Delay	12.5	2.0		1.3						52.0	35.9	
LOS	B	A		A						D	D	
Approach Delay	11.0			1.3							43.4	
Approach LOS	B			A							D	

## Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 16 (16%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.71

Intersection Signal Delay: 19.2


Intersection LOS: B

Intersection Capacity Utilization 42.2%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2601: Pitkin & East

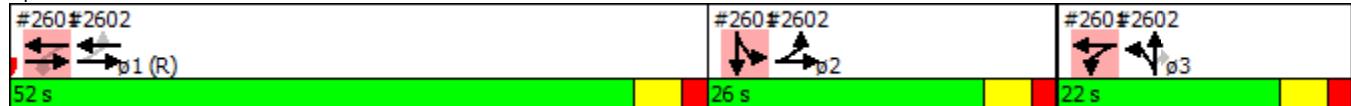

Lanes, Volumes, Timings  
2601: Pitkin & East


1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	0	445	51	78	316	0	0	0	0	197	114	27
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		125	0		0	0	0	0	0	0	0
Storage Lanes	0		1	0		0	0	0	0	1	0	0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	0.95	0.95
Frt				0.850							0.972	
Flt Protected					0.990						0.950	
Satd. Flow (prot)	0	3539	1583	0	3470	0	0	0	0	1770	3440	0
Flt Permitted					0.778						0.950	
Satd. Flow (perm)	0	3539	1583	0	2727	0	0	0	0	1770	3440	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			87									29
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		763			148			439			686	
Travel Time (s)		17.3			3.4			10.0			15.6	
Peak Hour Factor	0.92	0.92	0.92	0.93	0.93	0.93	0.90	0.90	0.90	0.89	0.89	0.89
Heavy Vehicles (%)	2%	2%	2%	3%	3%	3%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	0	484	55	84	340	0	0	0	0	221	128	30
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	484	55	0	424	0	0	0	0	221	158	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors		1	1	1	1					1	1	
Detector Template												
Leading Detector (ft)		50	50	50	50					50	50	
Trailing Detector (ft)		0	0	0	0					0	0	
Detector 1 Position(ft)		0	0	0	0					0	0	
Detector 1 Size(ft)		50	50	50	50					50	50	
Detector 1 Type		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex					Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Detector 1 Queue (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Detector 1 Delay (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Turn Type	NA	Perm	pm+pt	NA						Split	NA	
Protected Phases	1		3	1 3						2	2	
Permitted Phases		1	1	3	1 3					2	2	
Detector Phase		1	1	3	1 3					2	2	
Switch Phase												
Minimum Initial (s)		6.0	6.0	6.0						6.0	6.0	
Minimum Split (s)		23.0	23.0	22.0						23.0	23.0	
Total Split (s)		35.0	35.0	29.0						36.0	36.0	

# Lanes, Volumes, Timings

2601: Pitkin & East

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (%)	35.0%	35.0%	29.0%							36.0%	36.0%	
Maximum Green (s)	29.5	29.5	23.5							30.5	30.5	
Yellow Time (s)	3.5	3.5	3.5							3.5	3.5	
All-Red Time (s)	2.0	2.0	2.0							2.0	2.0	
Lost Time Adjust (s)	0.0	0.0								0.0	0.0	
Total Lost Time (s)	5.5	5.5								5.5	5.5	
Lead/Lag	Lead	Lead								Lag	Lag	
Lead-Lag Optimize?												
Vehicle Extension (s)	2.0	2.0	3.0							3.0	3.0	
Recall Mode	C-Max	C-Max	None							None	None	
Walk Time (s)	7.0	7.0	7.0							7.0	7.0	
Flash Dont Walk (s)	10.0	10.0	9.0							9.0	9.0	
Pedestrian Calls (#/hr)	0	0	0							0	0	
Act Effct Green (s)	49.1	49.1		62.9						20.6	20.6	
Actuated g/C Ratio	0.49	0.49		0.63						0.21	0.21	
v/c Ratio	0.28	0.07		0.23						0.61	0.22	
Control Delay	12.5	0.3		5.9						45.1	28.5	
Queue Delay	0.0	0.0		0.1						0.0	0.0	
Total Delay	12.5	0.3		6.0						45.1	28.5	
LOS	B	A		A						D	C	
Approach Delay	11.2			6.0							38.2	
Approach LOS	B			A							D	

## Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 94 (94%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.61

Intersection Signal Delay: 17.2

Intersection LOS: B

Intersection Capacity Utilization 48.0%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2601: Pitkin & East



	↑	→	↓	↗	↖	↙	↖	↑	↗	↖	↙	↓	↗
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations		↑↑			↑↑			↑↑↑					
Volume (vph)	9	353	0	0	470	37	118	152	60	0	0	0	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	
Lane Util. Factor	0.95	0.95	1.00	1.00	0.95	0.95	0.91	0.91	0.91	1.00	1.00	1.00	
Fr <sub>t</sub>						0.989			0.973				
Flt Protected		0.999							0.982				
Satd. Flow (prot)	0	3468	0	0	3368	0	0	4676	0	0	0	0	
Flt Permitted		0.940						0.982					
Satd. Flow (perm)	0	3263	0	0	3368	0	0	4676	0	0	0	0	
Right Turn on Red			Yes			Yes			Yes			Yes	
Satd. Flow (RTOR)					13			55					
Link Speed (mph)		30			30			30			30		
Link Distance (ft)		316			584			383			361		
Travel Time (s)		7.2			13.3			8.7			8.2		
Peak Hour Factor	0.88	0.88	0.88	0.92	0.92	0.92	0.90	0.90	0.90	0.90	0.90	0.90	
Heavy Vehicles (%)	4%	4%	4%	6%	6%	6%	6%	6%	6%	2%	2%	2%	
Adj. Flow (vph)	10	401	0	0	511	40	131	169	67	0	0	0	
Shared Lane Traffic (%)													
Lane Group Flow (vph)	0	411	0	0	551	0	0	367	0	0	0	0	
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No	
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right	
Median Width(ft)		0			0			0			0		
Link Offset(ft)		0			0			0			0		
Crosswalk Width(ft)		16			16			16			16		
Two way Left Turn Lane													
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15		9	15		9	15		9	15		9	
Number of Detectors	1	1			1		1	1					
Detector Template													
Leading Detector (ft)	50	50			50		50	50					
Trailing Detector (ft)	0	0			0		0	0					
Detector 1 Position(ft)	0	0			0		0	0					
Detector 1 Size(ft)	50	50			50		50	50					
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex		Cl+Ex	Cl+Ex					
Detector 1 Channel													
Detector 1 Extend (s)	0.0	0.0			0.0		0.0	0.0					
Detector 1 Queue (s)	0.0	0.0			0.0		0.0	0.0					
Detector 1 Delay (s)	0.0	0.0			0.0		0.0	0.0					
Turn Type	custom	NA			NA		Split	NA					
Protected Phases		2 3			2 3		1	1					
Permitted Phases	2				2 3								
Detector Phase	2	2 3			2 3		1	1					
Switch Phase													
Minimum Initial (s)	6.0						7.0	7.0					
Minimum Split (s)	15.0						30.0	30.0					
Total Split (s)	30.0						40.0	40.0					
Total Split (%)	30.0%						40.0%	40.0%					
Maximum Green (s)	24.0						34.0	34.0					
Yellow Time (s)	3.5						3.5	3.5					

Lane Group	ø3
Lane Configurations	
Volume (vph)	
Ideal Flow (vphpl)	
Lane Util. Factor	
Fr <sub>t</sub>	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Right Turn on Red	
Satd. Flow (RTOR)	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Heavy Vehicles (%)	
Adj. Flow (vph)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Enter Blocked Intersection	
Lane Alignment	
Median Width(ft)	
Link Offset(ft)	
Crosswalk Width(ft)	
Two way Left Turn Lane	
Headway Factor	
Turning Speed (mph)	
Number of Detectors	
Detector Template	
Leading Detector (ft)	
Trailing Detector (ft)	
Detector 1 Position(ft)	
Detector 1 Size(ft)	
Detector 1 Type	
Detector 1 Channel	
Detector 1 Extend (s)	
Detector 1 Queue (s)	
Detector 1 Delay (s)	
Turn Type	
Protected Phases	3
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	6.0
Minimum Split (s)	15.0
Total Split (s)	30.0
Total Split (%)	30%
Maximum Green (s)	23.5
Yellow Time (s)	3.5



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
All-Red Time (s)	2.5						2.5	2.5				
Lost Time Adjust (s)								0.0				
Total Lost Time (s)								6.0				
Lead/Lag	Lag						Lead	Lead				
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0						3.0	3.0				
Recall Mode	None						C-Max	C-Max				
Walk Time (s)								7.0	7.0			
Flash Dont Walk (s)								16.0	16.0			
Pedestrian Calls (#/hr)								0	0			
Act Effct Green (s)	54.0			54.0				34.0				
Actuated g/C Ratio	0.54			0.54				0.34				
v/c Ratio	0.23			0.30				0.23				
Control Delay	4.6			3.6				15.9				
Queue Delay	0.0			0.0				0.0				
Total Delay	4.6			3.6				15.9				
LOS	A			A				B				
Approach Delay	4.6			3.6				15.9				
Approach LOS	A			A				B				

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 38 (38%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.77

Intersection Signal Delay: 7.3

Intersection LOS: A

Intersection Capacity Utilization 32.9%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 3044: Union & University



Lane Group	ø3
All-Red Time (s)	3.0
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Vehicle Extension (s)	3.0
Recall Mode	None
Walk Time (s)	
Flash Dont Walk (s)	
Pedestrian Calls (#/hr)	
Act Effct Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Intersection Summary	

Lanes, Volumes, Timings  
3044: Union & University

1/7/2014

	↑	→	↓	↗	↖	↙	↖	↗	↑	↗	↖	↓	↗
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	
Lane Configurations		↑↑			↑↑		↑	↑↑					
Volume (vph)	6	526	0	0	424	30	208	237	116	0	0	0	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	
Lane Util. Factor	0.95	0.95	1.00	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00	
Fr <sub>t</sub>					0.990				0.951				
Flt Protected		0.999						0.950					
Satd. Flow (prot)	0	3536	0	0	3504	0	1770	3366	0	0	0	0	
Flt Permitted		0.948					0.950						
Satd. Flow (perm)	0	3355	0	0	3504	0	1770	3366	0	0	0	0	
Right Turn on Red			Yes			Yes			Yes			Yes	
Satd. Flow (RTOR)					11			91					
Link Speed (mph)		30			30			30			30		
Link Distance (ft)		298			584			576			361		
Travel Time (s)		6.8			13.3			13.1			8.2		
Peak Hour Factor	0.78	0.78	0.78	0.78	0.78	0.78	0.86	0.86	0.86	0.90	0.90	0.90	
Adj. Flow (vph)	8	674	0	0	544	38	242	276	135	0	0	0	
Shared Lane Traffic (%)													
Lane Group Flow (vph)	0	682	0	0	582	0	242	411	0	0	0	0	
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No	
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right	
Median Width(ft)	0				0			12			12		
Link Offset(ft)	0				0			0			0		
Crosswalk Width(ft)	16				16			16			16		
Two way Left Turn Lane													
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15		9	15		9	15		9	15		9	
Number of Detectors	1	1			1		1	1					
Detector Template													
Leading Detector (ft)	50	50			50		50	50					
Trailing Detector (ft)	0	0			0		0	0					
Detector 1 Position(ft)	0	0			0		0	0					
Detector 1 Size(ft)	50	50			50		50	50					
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex		Cl+Ex	Cl+Ex					
Detector 1 Channel													
Detector 1 Extend (s)	0.0	0.0			0.0		0.0	0.0					
Detector 1 Queue (s)	0.0	0.0			0.0		0.0	0.0					
Detector 1 Delay (s)	0.0	0.0			0.0		0.0	0.0					
Turn Type	custom	NA			NA		Split	NA					
Protected Phases		2 3			2 3			1	1				
Permitted Phases	2				2 3								
Detector Phase	2	2 3			2 3			1	1				
Switch Phase													
Minimum Initial (s)	6.0						7.0	7.0					
Minimum Split (s)	15.0						30.0	30.0					
Total Split (s)	31.0						40.0	40.0					
Total Split (%)	31.0%						40.0%	40.0%					
Maximum Green (s)	25.0						34.0	34.0					
Yellow Time (s)	3.5						3.5	3.5					
All-Red Time (s)	2.5						2.5	2.5					

Lane Group	ø3
Lane Configurations	
Volume (vph)	
Ideal Flow (vphpl)	
Lane Util. Factor	
Fr <sub>t</sub>	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Right Turn on Red	
Satd. Flow (RTOR)	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Adj. Flow (vph)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Enter Blocked Intersection	
Lane Alignment	
Median Width(ft)	
Link Offset(ft)	
Crosswalk Width(ft)	
Two way Left Turn Lane	
Headway Factor	
Turning Speed (mph)	
Number of Detectors	
Detector Template	
Leading Detector (ft)	
Trailing Detector (ft)	
Detector 1 Position(ft)	
Detector 1 Size(ft)	
Detector 1 Type	
Detector 1 Channel	
Detector 1 Extend (s)	
Detector 1 Queue (s)	
Detector 1 Delay (s)	
Turn Type	
Protected Phases	3
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	6.0
Minimum Split (s)	15.0
Total Split (s)	29.0
Total Split (%)	29%
Maximum Green (s)	22.5
Yellow Time (s)	3.5
All-Red Time (s)	3.0



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lost Time Adjust (s)							0.0	0.0				
Total Lost Time (s)							6.0	6.0				
Lead/Lag	Lag						Lead	Lead				
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0						3.0	3.0				
Recall Mode	None						C-Max	C-Max				
Walk Time (s)							7.0	7.0				
Flash Dont Walk (s)							16.0	16.0				
Pedestrian Calls (#/hr)							0	0				
Act Effct Green (s)	54.0			54.0			34.0	34.0				
Actuated g/C Ratio	0.54			0.54			0.34	0.34				
v/c Ratio	0.38			0.31			0.40	0.34				
Control Delay	7.0			8.5			34.5	25.9				
Queue Delay	0.8			0.0			0.0	0.0				
Total Delay	7.8			8.5			34.5	25.9				
LOS	A			A			C	C				
Approach Delay	7.8			8.5			29.1					
Approach LOS	A			A			C					

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 51 (51%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.99

Intersection Signal Delay: 15.3

Intersection LOS: B

Intersection Capacity Utilization 40.3%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 3044: Union & University



Lane Group	ø3
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Vehicle Extension (s)	3.0
Recall Mode	None
Walk Time (s)	
Flash Dont Walk (s)	
Pedestrian Calls (#/hr)	
Act Effct Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Intersection Summary	

Lanes, Volumes, Timings  
3042: University/IL WB & Main

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	9	292	148	1	680	445	239	369	3	425	341	10
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	125		0	0		0	0		0	250		250
Storage Lanes	1		1	0		1	1		0	1		1
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.91	0.91	0.95	0.95	1.00	0.91	0.91	0.95	0.91	0.91	0.95
Frt		0.992	0.850			0.850		0.999			0.997	
Flt Protected	0.950						0.950	0.995		0.950	0.984	
Satd. Flow (prot)	1597	3036	1301	0	3312	1482	1579	3305	0	1507	3112	0
Flt Permitted	0.228				0.955		0.950	0.995		0.950	0.984	
Satd. Flow (perm)	383	3036	1301	0	3163	1482	1579	3305	0	1507	3112	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)	6	142			82			1			2	
Link Speed (mph)	30			30			30			30		
Link Distance (ft)	297			291			316			393		
Travel Time (s)	6.8			6.6			7.2			8.9		
Peak Hour Factor	0.87	0.87	0.87	0.90	0.90	0.90	0.81	0.81	0.81	0.92	0.92	0.92
Heavy Vehicles (%)	13%	13%	13%	9%	9%	9%	4%	4%	4%	9%	9%	9%
Adj. Flow (vph)	10	336	170	1	756	494	295	456	4	462	371	11
Shared Lane Traffic (%)			11%				17%			40%		
Lane Group Flow (vph)	10	355	151	0	757	494	245	510	0	277	567	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(ft)		12			12			12			12	
Link Offset(ft)	0			0			0			0		
Crosswalk Width(ft)	16			16			16			16		
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	1	1	1	1	1	1		1	1	
Detector Template												
Leading Detector (ft)	50	50	50	50	50	50	50	50		50	50	
Trailing Detector (ft)	0	0	0	0	0	0	0	0		0	0	
Detector 1 Position(ft)	0	0	0	0	0	0	0	0		0	0	
Detector 1 Size(ft)	50	50	50	50	50	50	50	50		50	50	
Detector 1 Type	Cl+Ex		Cl+Ex	Cl+Ex								
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		0.0	0.0	
Turn Type	Perm	NA	pm+ov	Perm	NA	pm+ov	Split	NA		Split	NA	
Protected Phases		1	3		1	2	3	3		2	2	
Permitted Phases	1		1	1		1						
Detector Phase	1	1	3	1	1	2	3	3		2	2	
Switch Phase												
Minimum Initial (s)	7.0	7.0	6.0	7.0	7.0	6.0	6.0	6.0		6.0	6.0	
Minimum Split (s)	30.0	30.0	15.0	30.0	30.0	15.0	15.0	15.0		15.0	15.0	
Total Split (s)	40.0	40.0	30.0	40.0	40.0	30.0	30.0	30.0		30.0	30.0	



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (%)	40.0%	40.0%	30.0%	40.0%	40.0%	30.0%	30.0%	30.0%	30.0%	30.0%	30.0%	30.0%
Maximum Green (s)	34.0	34.0	23.5	34.0	34.0	24.0	23.5	23.5	24.0	24.0	24.0	24.0
Yellow Time (s)	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5
All-Red Time (s)	2.5	2.5	3.0	2.5	2.5	2.5	3.0	3.0	2.5	2.5	2.5	2.5
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.0	6.0	6.5		6.0	6.0	6.5	6.5	6.0	6.0	6.0	6.0
Lead/Lag	Lead	Lead		Lead	Lead	Lag			Lag	Lag		
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0
Recall Mode	C-Max	C-Max	None	C-Max	C-Max	None						
Walk Time (s)	7.0	7.0		7.0	7.0							
Flash Dont Walk (s)	16.0	16.0		16.0	16.0							
Pedestrian Calls (#/hr)	0	0		0	0							
Act Effct Green (s)	34.0	34.0	63.5		34.0	64.0	23.5	23.5	24.0	24.0	24.0	24.0
Actuated g/C Ratio	0.34	0.34	0.64		0.34	0.64	0.24	0.24	0.24	0.24	0.24	0.24
v/c Ratio	0.08	0.34	0.17		0.70	0.51	0.66	0.66	0.77	0.77	0.76	0.76
Control Delay	23.8	23.4	5.5		9.0	4.9	38.8	33.7	51.1	42.7		
Queue Delay	0.0	0.0	0.0		0.2	2.4	1.0	0.7	0.0	0.0		
Total Delay	23.8	23.4	5.5		9.2	7.3	39.8	34.4	51.1	42.7		
LOS	C	C	A		A	A	D	C		D	D	
Approach Delay		18.2			8.4			36.2		45.4		
Approach LOS		B			A			D		D		

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 38 (38%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.77

Intersection Signal Delay: 25.4

Intersection LOS: C

Intersection Capacity Utilization 64.1%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 3042: University/IL WB & Main



Lanes, Volumes, Timings  
3042: University/IL WB & Main

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	18	530	215	0	525	430	230	418	1	398	316	5
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	125		0	0		0	0		0	250		250
Storage Lanes	1		1	0		1	1		0	1		1
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.91	0.91	1.00	0.95	1.00	0.91	0.91	0.95	0.91	0.91	0.95
Frt		0.994	0.850			0.850					0.998	
Flt Protected	0.950						0.950	0.997		0.950	0.983	
Satd. Flow (prot)	1736	3305	1413	0	3438	1538	1610	3380	0	1595	3294	0
Flt Permitted	0.349						0.950	0.997		0.950	0.983	
Satd. Flow (perm)	638	3305	1413	0	3438	1538	1610	3380	0	1595	3294	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		4	154			56					1	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		298			291			298			403	
Travel Time (s)		6.8			6.6			6.8			9.2	
Peak Hour Factor	0.83	0.83	0.83	0.93	0.93	0.93	0.84	0.84	0.84	0.85	0.85	0.85
Heavy Vehicles (%)	4%	4%	4%	5%	5%	5%	2%	2%	2%	3%	3%	3%
Adj. Flow (vph)	22	639	259	0	565	462	274	498	1	468	372	6
Shared Lane Traffic (%)			10%				10%			41%		
Lane Group Flow (vph)	22	665	233	0	565	462	247	526	0	276	570	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	1		1	1	1	1		1	1	
Detector Template												
Leading Detector (ft)	50	50	50		50	50	50	50		50	50	
Trailing Detector (ft)	0	0	0		0	0	0	0		0	0	
Detector 1 Position(ft)	0	0	0		0	0	0	0		0	0	
Detector 1 Size(ft)	50	50	50		50	50	50	50		50	50	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0		0.0	0.0	
Turn Type	Perm	NA	pm+ov		NA	pm+ov	Split	NA		Split	NA	
Protected Phases		1	3		1	2	3	3		2	2	
Permitted Phases	1		1			1						
Detector Phase	1	1	3		1	2	3	3		2	2	
Switch Phase												
Minimum Initial (s)	7.0	7.0	6.0		7.0	6.0	6.0	6.0		6.0	6.0	
Minimum Split (s)	30.0	30.0	15.0		30.0	15.0	15.0	15.0		15.0	15.0	
Total Split (s)	40.0	40.0	29.0		40.0	31.0	29.0	29.0		31.0	31.0	



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (%)	40.0%	40.0%	29.0%		40.0%	31.0%	29.0%	29.0%		31.0%	31.0%	
Maximum Green (s)	34.0	34.0	22.5		34.0	25.0	22.5	22.5		25.0	25.0	
Yellow Time (s)	3.5	3.5	3.5		3.5	3.5	3.5	3.5		3.5	3.5	
All-Red Time (s)	2.5	2.5	3.0		2.5	2.5	3.0	3.0		2.5	2.5	
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.0	6.0	6.5		6.0	6.0	6.5	6.5		6.0	6.0	
Lead/Lag	Lead	Lead			Lead	Lag				Lag	Lag	
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0	3.0		3.0	3.0	3.0	3.0		3.0	3.0	
Recall Mode	C-Max	C-Max	None		C-Max	None	None	None		None	None	
Walk Time (s)	7.0	7.0			7.0							
Flash Dont Walk (s)	16.0	16.0			16.0							
Pedestrian Calls (#/hr)	0	0			0							
Act Effct Green (s)	34.0	34.0	62.5		34.0	65.0	22.5	22.5		25.0	25.0	
Actuated g/C Ratio	0.34	0.34	0.62		0.34	0.65	0.22	0.22		0.25	0.25	
v/c Ratio	0.10	0.59	0.25		0.48	0.45	0.68	0.69		0.69	0.69	
Control Delay	17.2	18.7	4.0		11.5	1.2	40.0	34.9		44.5	39.1	
Queue Delay	0.0	0.5	0.5		0.8	2.4	2.5	1.8		0.0	0.0	
Total Delay	17.2	19.2	4.5		12.2	3.7	42.5	36.8		44.5	39.1	
LOS	B	B	A		B	A	D	D		D	D	
Approach Delay		15.4			8.4			38.6		40.8		
Approach LOS		B			A			D		D		

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 51 (51%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.99

Intersection Signal Delay: 24.4

Intersection LOS: C

Intersection Capacity Utilization 60.1%

ICU Level of Service B

Analysis Period (min) 15

Splits and Phases: 3042: University/IL WB & Main



Lanes, Volumes, Timings  
3043: Union & Main

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	52	671	0	0	1034	24	4	88	105	29	0	88
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	125		0	0		0	0		0	0		0
Storage Lanes	1		0	0		0	1		0	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.91	1.00	1.00	0.91	0.91	1.00	0.95	0.95	1.00	1.00	1.00
Frt					0.997			0.919			0.898	
Flt Protected	0.950						0.950				0.988	
Satd. Flow (prot)	1641	4715	0	0	4879	0	1597	2936	0	0	1492	0
Flt Permitted	0.137						0.664				0.871	
Satd. Flow (perm)	237	4715	0	0	4879	0	1116	2936	0	0	1315	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					4			115			100	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		291			715			361			297	
Travel Time (s)		6.6			16.3			8.2			6.8	
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.91	0.91	0.91	0.88	0.88	0.88
Heavy Vehicles (%)	10%	10%	10%	6%	6%	6%	13%	13%	13%	13%	13%	13%
Adj. Flow (vph)	57	729	0	0	1124	26	4	97	115	33	0	100
Shared Lane Traffic (%)												
Lane Group Flow (vph)	57	729	0	0	1150	0	4	212	0	0	133	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1			1		1	1		1	1	
Detector Template												
Leading Detector (ft)	50	50			50		50	50		50	50	
Trailing Detector (ft)	0	0			0		0	0		0	0	
Detector 1 Position(ft)	0	0			0		0	0		0	0	
Detector 1 Size(ft)	50	50			50		50	50		50	50	
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0			0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0			0.0		0.0	0.0		0.0	0.0	
Turn Type	pm+pt	NA			NA		Perm	NA		Perm	NA	
Protected Phases	2	1 2			1			3			3	
Permitted Phases	1 2							3			3	
Detector Phase	2	1 2			1		3	3		3	3	
Switch Phase												
Minimum Initial (s)	6.0				7.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	15.0				30.0		15.0	15.0		15.0	15.0	
Total Split (s)	30.0				40.0		30.0	30.0		30.0	30.0	

Lanes, Volumes, Timings  
3043: Union & Main

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (%)	30.0%				40.0%		30.0%	30.0%		30.0%	30.0%	
Maximum Green (s)	24.0				34.0		23.5	23.5		23.5	23.5	
Yellow Time (s)	3.5				3.5		3.5	3.5		3.5	3.5	
All-Red Time (s)	2.5				2.5		3.0	3.0		3.0	3.0	
Lost Time Adjust (s)	0.0				0.0		0.0	0.0		0.0		
Total Lost Time (s)	6.0				6.0		6.5	6.5			6.5	
Lead/Lag	Lag					Lead						
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0				3.0		3.0	3.0		3.0	3.0	
Recall Mode	None				C-Max		None	None		None	None	
Walk Time (s)					7.0							
Flash Dont Walk (s)					16.0							
Pedestrian Calls (#/hr)					0							
Act Effct Green (s)	58.0	64.0			34.0		23.5	23.5			23.5	
Actuated g/C Ratio	0.58	0.64			0.34		0.24	0.24			0.24	
v/c Ratio	0.12	0.24			0.69		0.02	0.27			0.35	
Control Delay	4.7	3.1			27.2		44.5	32.4			13.1	
Queue Delay	0.0	0.2			0.0		0.0	0.0			0.0	
Total Delay	4.7	3.3			27.2		44.5	32.4			13.1	
LOS	A	A			C		D	C			B	
Approach Delay		3.4			27.2			32.6			13.1	
Approach LOS		A			C			C			B	

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 38 (38%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.77

Intersection Signal Delay: 18.7

Intersection LOS: B

Intersection Capacity Utilization 59.2%

ICU Level of Service B

Analysis Period (min) 15

Splits and Phases: 3043: Union & Main



Lanes, Volumes, Timings  
3043: Union & Main

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	52	881	0	0	902	62	5	100	195	28	0	48
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	125		0	0		0	0		0	0		0
Storage Lanes	1		0	0		0	1		0	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.91	1.00	1.00	*0.60	0.91	1.00	0.95	0.95	1.00	1.00	1.00
Frt					0.990			0.901			0.915	
Flt Protected	0.950						0.950				0.982	
Satd. Flow (prot)	1752	5036	0	0	3256	0	1770	3189	0	0	1642	0
Flt Permitted	0.118						0.730				0.775	
Satd. Flow (perm)	218	5036	0	0	3256	0	1360	3189	0	0	1296	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					7			144			98	
Link Speed (mph)	30				30			30			30	
Link Distance (ft)	291				715			361			297	
Travel Time (s)	6.6				16.3			8.2			6.8	
Peak Hour Factor	0.88	0.88	0.88	0.88	0.88	0.88	0.92	0.92	0.92	0.78	0.78	0.78
Heavy Vehicles (%)	3%	3%	3%	4%	4%	4%	2%	2%	2%	4%	4%	4%
Adj. Flow (vph)	59	1001	0	0	1025	70	5	109	212	36	0	62
Shared Lane Traffic (%)												
Lane Group Flow (vph)	59	1001	0	0	1095	0	5	321	0	0	98	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)	12				12			12			12	
Link Offset(ft)	0				0			0			0	
Crosswalk Width(ft)	16				16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1			1		1	1		1	1	
Detector Template												
Leading Detector (ft)	50	50			50		50	50		50	50	
Trailing Detector (ft)	0	0			0		0	0		0	0	
Detector 1 Position(ft)	0	0			0		0	0		0	0	
Detector 1 Size(ft)	50	50			50		50	50		50	50	
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0			0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0			0.0		0.0	0.0		0.0	0.0	
Turn Type	pm+pt	NA			NA		Perm	NA		Perm	NA	
Protected Phases	2	1 2			1			3			3	
Permitted Phases	1 2						3			3		
Detector Phase	2	1 2			1		3	3		3	3	
Switch Phase												
Minimum Initial (s)	6.0				7.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	15.0				30.0		15.0	15.0		15.0	15.0	
Total Split (s)	31.0				40.0		29.0	29.0		29.0	29.0	

Lanes, Volumes, Timings  
3043: Union & Main

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (%)	31.0%				40.0%		29.0%	29.0%		29.0%	29.0%	
Maximum Green (s)	25.0				34.0		22.5	22.5		22.5	22.5	
Yellow Time (s)	3.5				3.5		3.5	3.5		3.5	3.5	
All-Red Time (s)	2.5				2.5		3.0	3.0		3.0	3.0	
Lost Time Adjust (s)	0.0				0.0		0.0	0.0		0.0		
Total Lost Time (s)	6.0				6.0		6.5	6.5		6.5		
Lead/Lag	Lag					Lead						
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0				3.0		3.0	3.0		3.0	3.0	
Recall Mode	None				C-Max		None	None		None	None	
Walk Time (s)						7.0						
Flash Dont Walk (s)						16.0						
Pedestrian Calls (#/hr)						0						
Act Effct Green (s)	59.0	65.0			34.0		22.5	22.5		22.5		
Actuated g/C Ratio	0.59	0.65			0.34		0.22	0.22		0.22		
v/c Ratio	0.12	0.31			0.99		0.02	0.39		0.27		
Control Delay	2.8	1.8			50.4		47.8	34.8		8.7		
Queue Delay	0.0	0.2			0.0		0.0	0.0		0.0		
Total Delay	2.8	2.0			50.4		47.8	34.8		8.7		
LOS	A	A			D		D	C		A		
Approach Delay		2.0			50.4			35.0		8.7		
Approach LOS		A			D			D		A		

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 51 (51%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.99

Intersection Signal Delay: 27.0

Intersection LOS: C

Intersection Capacity Utilization 58.7%

ICU Level of Service B

Analysis Period (min) 15

\* User Entered Value


Splits and Phases: 3043: Union & Main




# **Appendix G – Traffic Analysis Contents**

## **2035 No Build Conditions**

- 2035 No Build Traffic Volumes**
- 2035 No Build Capacity Analysis  
Printouts**
- Synchro Files (available upon request)**

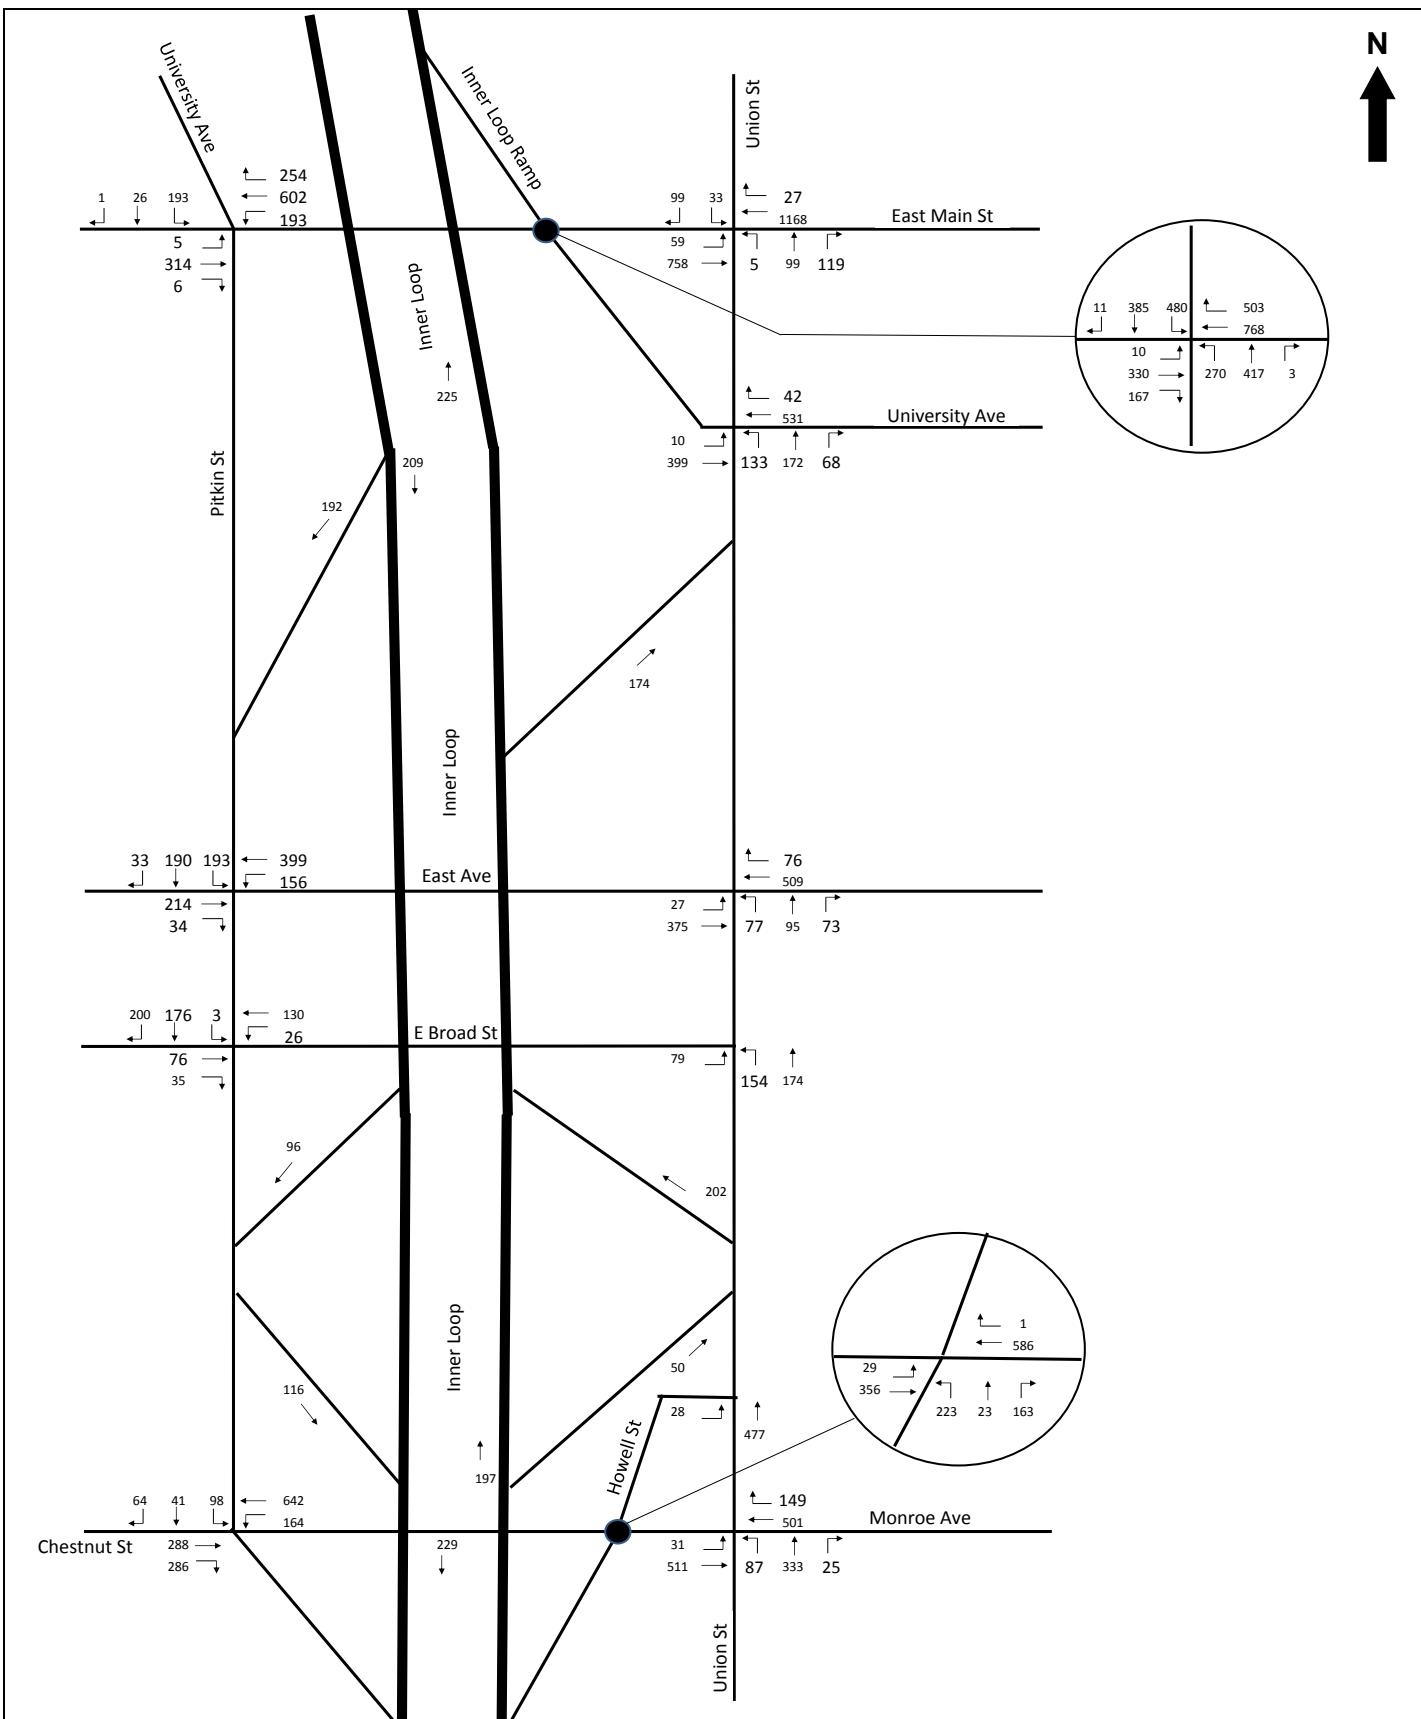


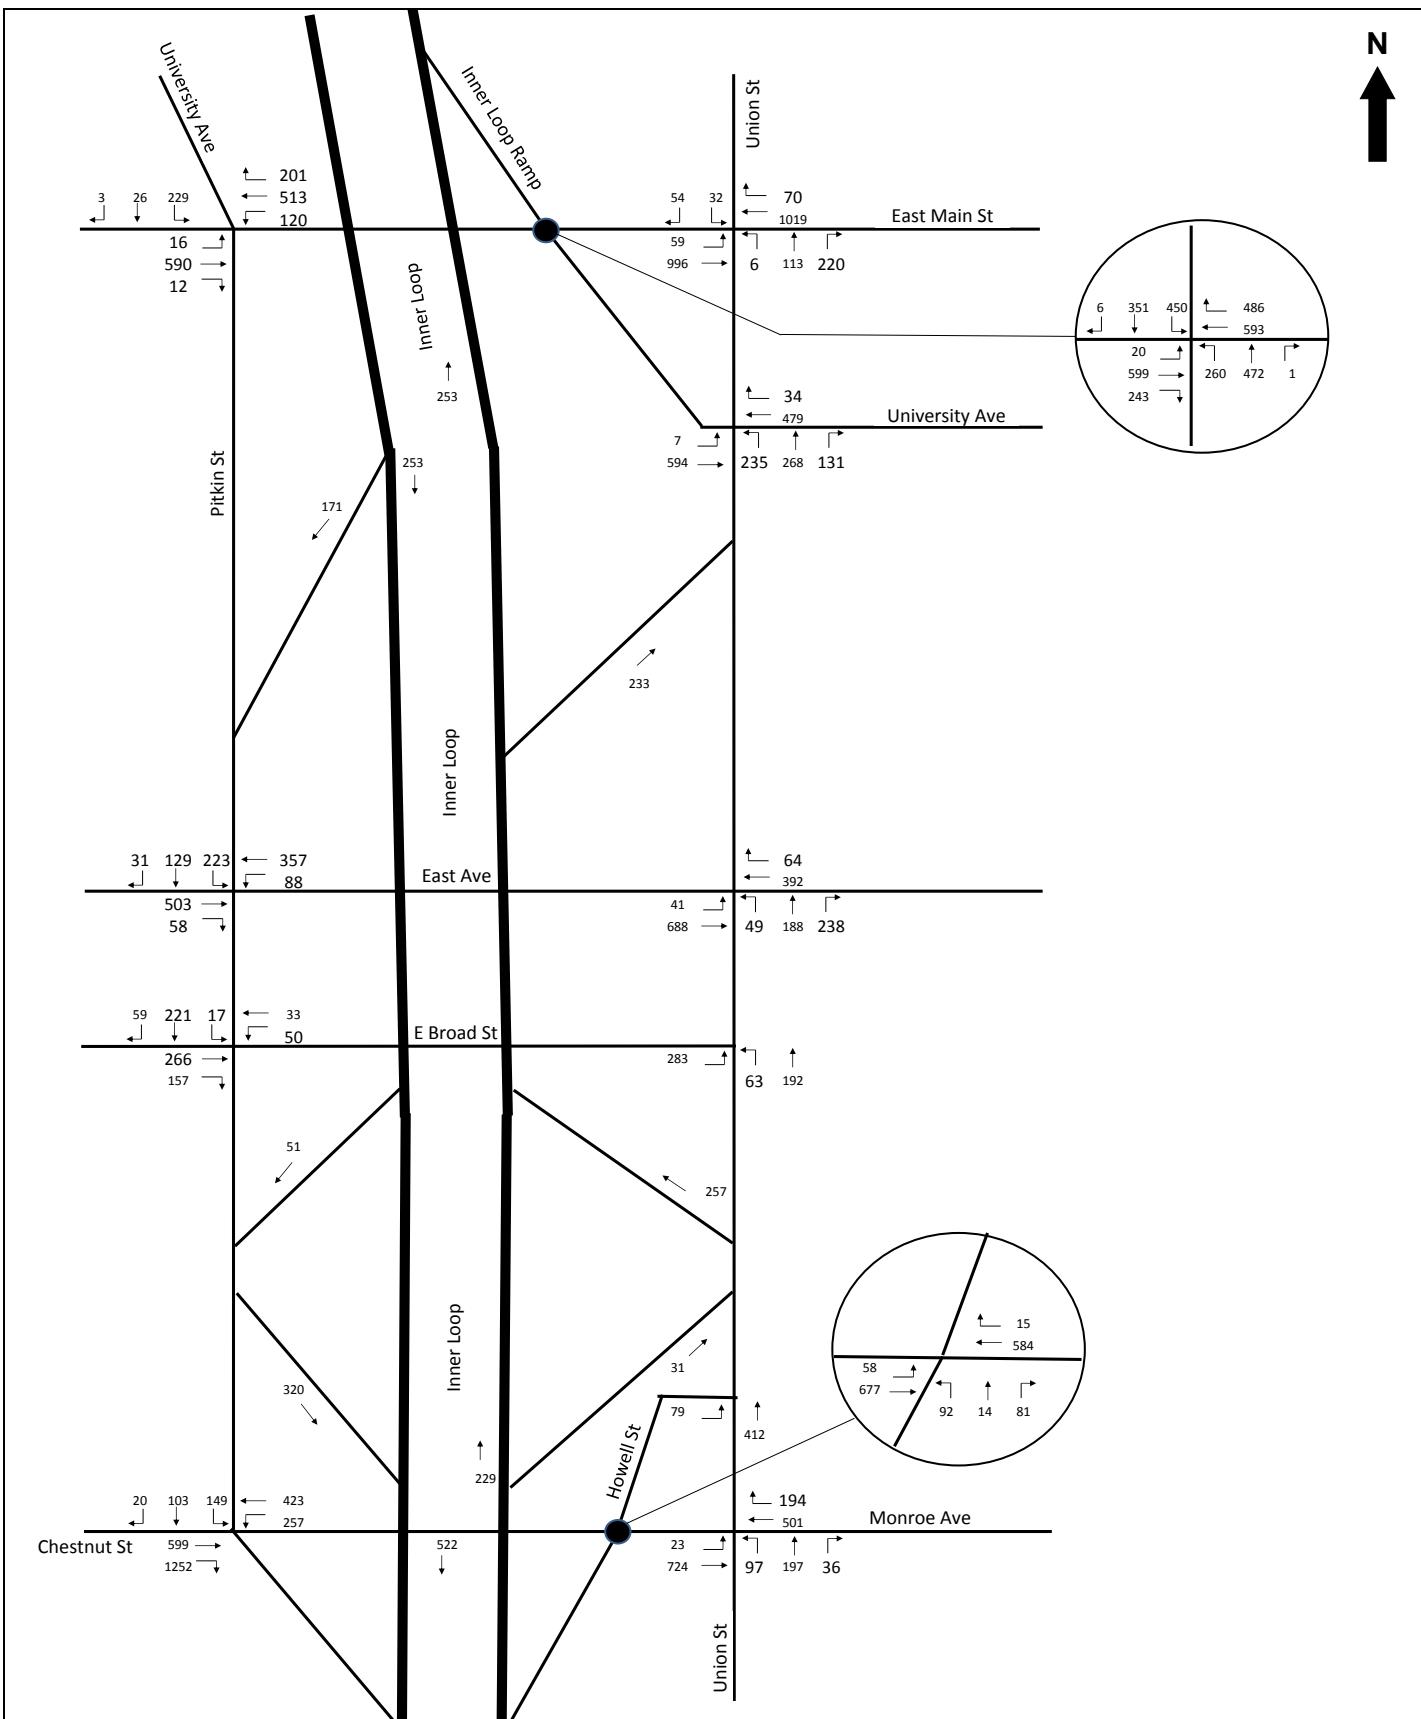

## Lanes, Volumes, Timings

2471: IL EB

1/7/2014




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	SEL	SET	SER	NWL	NWT	NWR
Lane Configurations												
Volume (vph)	197	20	144	0	0	0	26	315	0	0	519	1
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		200	0			0	0		0	0	50
Storage Lanes	0		1	0			0	0		1	0	1
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.95	1.00	1.00	0.95	0.95
Fr <sub>t</sub>				0.850								
Flt Protected			0.957						0.996			
Satd. Flow (prot)	0	1715	1524	0	0	0	0	3525	0	0	3539	0
Flt Permitted		0.957						0.897				
Satd. Flow (perm)	0	1715	1524	0	0	0	0	3175	0	0	3539	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			203									
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		768			258			174			411	
Travel Time (s)		17.5			5.9			4.0			9.3	
Peak Hour Factor	0.80	0.80	0.80	0.90	0.95	0.90	0.92	0.92	0.92	0.94	0.94	0.94
Growth Factor	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%
Heavy Vehicles (%)	6%	6%	6%	2%	2%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	278	28	203	0	0	0	32	387	0	0	624	1
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	306	203	0	0	0	0	419	0	0	625	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	1					1	2			2
Detector Template	Left		Right				Left	Thru			Thru	
Leading Detector (ft)	20	50	20				20	100			100	
Trailing Detector (ft)	0	0	0				0	0			0	
Detector 1 Position(ft)	0	0	0				0	0			0	
Detector 1 Size(ft)	20	50	20				20	6			6	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex				Cl+Ex	Cl+Ex			Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0				0.0	0.0			0.0	
Detector 1 Queue (s)	0.0	0.0	0.0				0.0	0.0			0.0	
Detector 1 Delay (s)	0.0	0.0	0.0				0.0	0.0			0.0	
Detector 2 Position(ft)								94			94	
Detector 2 Size(ft)								6			6	
Detector 2 Type							Cl+Ex			Cl+Ex		
Detector 2 Channel												
Detector 2 Extend (s)								0.0			0.0	
Turn Type	Split	NA	Perm				pm+pt	NA			NA	
Protected Phases	2	2					3	1 3			1	

## Lanes, Volumes, Timings

2471: IL EB

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	SEL	SET	SER	NWL	NWT	NWR
Permitted Phases			2				1 3				1	
Detector Phase	2	2	2					3	1 3			1
Switch Phase												
Minimum Initial (s)	6.0	6.0	6.0					3.0			3.0	
Minimum Split (s)	32.0	32.0	32.0					25.0			25.0	
Total Split (s)	32.0	32.0	32.0					25.0			28.0	
Total Split (%)	37.6%	37.6%	37.6%					29.4%			32.9%	
Maximum Green (s)	27.0	27.0	27.0					20.0			23.0	
Yellow Time (s)	4.0	4.0	4.0					4.0			4.0	
All-Red Time (s)	1.0	1.0	1.0					1.0			1.0	
Lost Time Adjust (s)	0.0	0.0									0.0	
Total Lost Time (s)		5.0	5.0								5.0	
Lead/Lag	Lag	Lag	Lag								Lead	
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0	3.0					3.0			3.0	
Recall Mode	Min	Min	Min					None			C-Max	
Walk Time (s)	7.0	7.0	7.0					5.0			5.0	
Flash Dont Walk (s)	18.0	18.0	18.0					15.0			15.0	
Pedestrian Calls (#/hr)	0	0	0					0			0	
Act Effect Green (s)	20.4	20.4						49.6			39.4	
Actuated g/C Ratio	0.24	0.24						0.58			0.46	
v/c Ratio	0.74	0.39						0.22			0.38	
Control Delay	40.6	5.8						7.5			17.4	
Queue Delay	0.0	0.0						0.3			0.0	
Total Delay	40.6	5.8						7.8			17.4	
LOS	D	A						A			B	
Approach Delay	26.7							7.8			17.4	
Approach LOS	C							A			B	

## Intersection Summary

Area Type: Other

Cycle Length: 85

Actuated Cycle Length: 85

Offset: 73 (86%), Referenced to phase 1:NWSE, Start of Green

Natural Cycle: 85

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.74

Intersection Signal Delay: 17.9

Intersection LOS: B

Intersection Capacity Utilization 53.0%

ICU Level of Service A

Analysis Period (min) 15


Splits and Phases: 2471: IL EB



Lanes, Volumes, Timings  
2471: Monroe & IL EB

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	81	12	72	0	0	0	0	517	13	51	599	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	200		0	0		0	0		50	0		0
Storage Lanes	1		0	0		0	0		1	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.95	0.95	0.95	0.95	1.00
Frt			0.871					0.996				
Flt Protected		0.950									0.996	
Satd. Flow (prot)	1787	1639	0	0	0	0	0	3525	0	0	3525	0
Flt Permitted		0.950									0.857	
Satd. Flow (perm)	1787	1639	0	0	0	0	0	3525	0	0	3033	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		102						3				
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		324			342			409			178	
Travel Time (s)		7.4			7.8			9.3			4.0	
Peak Hour Factor	0.80	0.80	0.80	0.95	0.95	0.95	0.95	0.95	0.95	0.90	0.90	0.90
Growth Factor	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%
Heavy Vehicles (%)	1%	1%	1%	2%	2%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	114	17	102	0	0	0	0	615	15	64	752	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	114	119	0	0	0	0	0	630	0	0	816	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			0			0	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1						1		1		1
Detector Template												
Leading Detector (ft)	50	50						50		50		50
Trailing Detector (ft)	0	0						0		0		0
Detector 1 Position(ft)	0	0						0		0		0
Detector 1 Size(ft)	50	50						50		50		50
Detector 1 Type	Cl+Ex	Cl+Ex						Cl+Ex		Cl+Ex		Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0						0.0		0.0		0.0
Detector 1 Queue (s)	0.0	0.0						0.0		0.0		0.0
Detector 1 Delay (s)	0.0	0.0						0.0		0.0		0.0
Turn Type	Split	NA						NA		pm+pt		NA
Protected Phases	2	2						1		3		1 3
Permitted Phases								1		1 3		
Detector Phase	2	2						1		3		1 3
Switch Phase												
Minimum Initial (s)	6.0	6.0						7.0		6.0		
Minimum Split (s)	32.0	32.0						27.0		11.0		



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (s)	35.0	35.0						48.0		17.0		
Total Split (%)	35.0%	35.0%						48.0%		17.0%		
Maximum Green (s)	30.0	30.0						43.0		12.0		
Yellow Time (s)	4.0	4.0						4.0		4.0		
All-Red Time (s)	1.0	1.0						1.0		1.0		
Lost Time Adjust (s)	0.0	0.0						0.0				
Total Lost Time (s)	5.0	5.0						5.0				
Lead/Lag	Lag	Lag							Lead			
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0						2.0		3.0		
Recall Mode	Min	Min						C-Max		None		
Walk Time (s)	7.0	7.0						7.0				
Flash Dont Walk (s)	18.0	18.0						15.0				
Pedestrian Calls (#/hr)	0	0						0				
Act Effct Green (s)	13.7	13.7						55.6		71.3		
Actuated g/C Ratio	0.14	0.14						0.56		0.71		
v/c Ratio	0.47	0.38						0.32		0.36		
Control Delay	44.5	13.4						13.2		1.9		
Queue Delay	0.0	0.0						0.0		0.1		
Total Delay	44.5	13.4						13.3		2.0		
LOS	D	B						B		A		
Approach Delay		28.6						13.3		2.0		
Approach LOS		C						B		A		

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 65 (65%), Referenced to phase 1:NBSB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.49

Intersection Signal Delay: 9.9


Intersection LOS: A

Intersection Capacity Utilization 55.2%

ICU Level of Service B

Analysis Period (min) 15


Splits and Phases: 2471: Monroe & IL EB

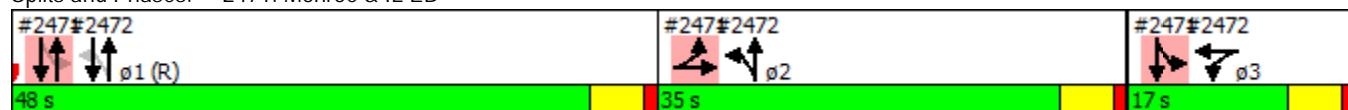

# Lanes, Volumes, Timings

571:

1/7/2014




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	SBL	SBR	NWL	NWR
Lane Configurations										
Volume (vph)	0	0	0	87	36	57	255	253	145	568
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	0.91	0.91	0.91	0.97	0.88	1.00	0.95
Fr <sub>t</sub>						0.952		0.850	0.912	0.850
Flt Protected						0.976		0.950		0.980
Satd. Flow (prot)	0	0	0	0	4634	0	3433	2787	1665	1504
Flt Permitted						0.976		0.950		0.741
Satd. Flow (perm)	0	0	0	0	4634	0	3433	2787	1259	1504
Right Turn on Red				Yes			Yes		Yes	
Satd. Flow (RTOR)						81			304	
Link Speed (mph)		30				30		30		30
Link Distance (ft)		470				260		648		174
Travel Time (s)		10.7				5.9		14.7		4.0
Peak Hour Factor	0.90	0.90	0.90	0.80	0.80	0.80	0.94	0.94	0.88	0.88
Growth Factor	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%
Heavy Vehicles (%)	2%	2%	2%	4%	4%	4%	2%	2%	2%	2%
Adj. Flow (vph)	0	0	0	123	51	81	307	304	186	729
Shared Lane Traffic (%)										36%
Lane Group Flow (vph)	0	0	0	0	255	0	307	304	448	467
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Right	Left	Right
Median Width(ft)		0				0		36		12
Link Offset(ft)		0				0		0		0
Crosswalk Width(ft)		16				16		16		16
Two way Left Turn Lane										
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	30	25	15	9
Number of Detectors				1	2		1	1	1	1
Detector Template				Left	Thru		Left	Right	Left	Right
Leading Detector (ft)				20	100		20	20	20	20
Trailing Detector (ft)				0	0		0	0	0	0
Detector 1 Position(ft)				0	0		0	0	0	0
Detector 1 Size(ft)				20	6		20	20	20	20
Detector 1 Type				Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex
Detector 1 Channel										
Detector 1 Extend (s)				0.0	0.0		0.0	0.0	0.0	0.0
Detector 1 Queue (s)				0.0	0.0		0.0	0.0	0.0	0.0
Detector 1 Delay (s)				0.0	0.0		0.0	0.0	0.0	0.0
Detector 2 Position(ft)					94					
Detector 2 Size(ft)					6					
Detector 2 Type					Cl+Ex					
Detector 2 Channel										
Detector 2 Extend (s)					0.0					
Turn Type				Split	NA		Prot	Free	D.P+P	pt+ov
Protected Phases				3	3		1		2	12
Permitted Phases							Free		12	
Detector Phase				3	3		1		2	12
Switch Phase										

# Lanes, Volumes, Timings

571:

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	SBL	SBR	NWL	NWR
Minimum Initial (s)				3.0	3.0		3.0		3.0	
Minimum Split (s)				25.0	25.0		25.0		25.0	
Total Split (s)				25.0	25.0		25.0		25.0	
Total Split (%)				33.3%	33.3%		33.3%		33.3%	
Maximum Green (s)				20.0	20.0		20.0		20.0	
Yellow Time (s)				3.0	3.0		3.0		3.0	
All-Red Time (s)				2.0	2.0		2.0		2.0	
Lost Time Adjust (s)				0.0	0.0		0.0		0.0	
Total Lost Time (s)					5.0		5.0		5.0	
Lead/Lag							Lead		Lag	
Lead-Lag Optimize?										
Vehicle Extension (s)				3.0	3.0		3.0		3.0	
Recall Mode				None	None		C-Max		Max	
Walk Time (s)				5.0	5.0		5.0		5.0	
Flash Dont Walk (s)				15.0	15.0		15.0		15.0	
Pedestrian Calls (#/hr)				0	0		0		0	
Act Effct Green (s)				8.2		31.8	75.0	51.8	56.8	
Actuated g/C Ratio				0.11		0.42	1.00	0.69	0.76	
v/c Ratio				0.44		0.21	0.11	0.46	0.41	
Control Delay				23.2		14.6	0.1	5.8	4.7	
Queue Delay				0.0		0.0	0.0	3.9	10.2	
Total Delay				23.2		14.6	0.1	9.7	14.9	
LOS				C		B	A	A	B	
Approach Delay				23.2		7.4		12.4		
Approach LOS				C		A		B		

## Intersection Summary

Area Type: Other

Cycle Length: 75

Actuated Cycle Length: 75

Offset: 65 (87%), Referenced to phase 1:NWSBL, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.46

Intersection Signal Delay: 12.2

Intersection LOS: B

Intersection Capacity Utilization 48.4%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 571:



Lanes, Volumes, Timings  
2472: Monroe & IL WB

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	0	0	0	132	91	18	227	374	0	0	530	1108
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	1.00	1.00	0.91	0.91	0.91	0.95	0.95	1.00	1.00	0.95	0.88
Fr <sub>t</sub>						0.989						0.850
Flt Protected						0.973			0.981			
Satd. Flow (prot)	0	0	0	0	4894	0	0	3472	0	0	3539	2787
Flt Permitted						0.973		0.607				
Satd. Flow (perm)	0	0	0	0	4894	0	0	2148	0	0	3539	2787
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					10							1111
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		410			1028			178			627	
Travel Time (s)		9.3			23.4			4.0			14.3	
Peak Hour Factor	0.95	0.95	0.95	0.92	0.92	0.92	0.94	0.94	0.94	0.91	1.00	0.91
Growth Factor	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%
Adj. Flow (vph)	0	0	0	162	112	22	273	450	0	0	599	1376
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	0	0	0	296	0	0	723	0	0	599	1376
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)	0				0			12			12	
Link Offset(ft)	0				0			0			0	
Crosswalk Width(ft)	16				16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		25
Number of Detectors			1		1		1		1		1	1
Detector Template												
Leading Detector (ft)			50		50		50		50		50	50
Trailing Detector (ft)			0		0		0		0		0	0
Detector 1 Position(ft)			0		0		0		0		0	0
Detector 1 Size(ft)			50		50		50		50		50	50
Detector 1 Type			Cl+Ex		Cl+Ex		Cl+Ex		Cl+Ex		Cl+Ex	Cl+Ex
Detector 1 Channel												
Detector 1 Extend (s)			0.0		0.0		0.0		0.0		0.0	0.0
Detector 1 Queue (s)			0.0		0.0		0.0		0.0		0.0	0.0
Detector 1 Delay (s)			0.0		0.0		0.0		0.0		0.0	0.0
Turn Type			Split		NA		pm+pt		NA		NA	Free
Protected Phases			3		3		2	1 2			1	
Permitted Phases							1 2					Free
Detector Phase			3		3		2	1 2			1	
Switch Phase												
Minimum Initial (s)			6.0		6.0		6.0				7.0	
Minimum Split (s)			11.0		11.0		32.0				27.0	
Total Split (s)			17.0		17.0		35.0				48.0	
Total Split (%)			17.0%		17.0%		35.0%				48.0%	
Maximum Green (s)			12.0		12.0		30.0				43.0	
Yellow Time (s)			4.0		4.0		4.0				4.0	



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
All-Red Time (s)				1.0	1.0		1.0				1.0	
Lost Time Adjust (s)					0.0						0.0	
Total Lost Time (s)					5.0						5.0	
Lead/Lag							Lag				Lead	
Lead-Lag Optimize?												
Vehicle Extension (s)				3.0	3.0		3.0				2.0	
Recall Mode				None	None		Min				C-Max	
Walk Time (s)							7.0				7.0	
Flash Dont Walk (s)							18.0				15.0	
Pedestrian Calls (#/hr)							0				0	
Act Effct Green (s)				15.6			69.4				55.6	100.0
Actuated g/C Ratio					0.16		0.69				0.56	1.00
v/c Ratio					0.38		0.43				0.30	0.49
Control Delay				37.6			3.6				12.3	0.4
Queue Delay				0.0			0.0				0.0	0.0
Total Delay				37.6			3.6				12.3	0.4
LOS					D		A				B	A
Approach Delay				37.6			3.6				4.0	
Approach LOS					D		A				A	

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 65 (65%), Referenced to phase 1:NBSB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.49

Intersection Signal Delay: 7.2


Intersection LOS: A

Intersection Capacity Utilization 56.5%

ICU Level of Service B

Analysis Period (min) 15

Splits and Phases: 2472: Monroe & IL WB

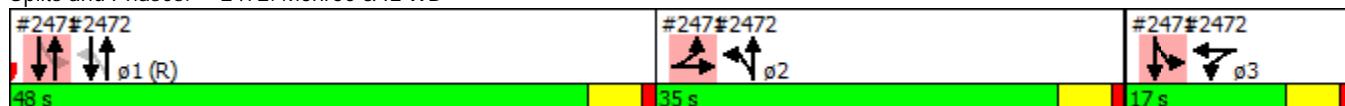

Lanes, Volumes, Timings  
246: Union & Monroe

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑			↑	↑	↑	↑↑				
Volume (vph)	27	452	0	0	443	132	77	295	22	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		50	250		250	0		0
Storage Lanes	1		0	0		1	1		0	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	1.00	1.00	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00
Fr <sub>t</sub>					0.996	0.850			0.989			
Flt Protected	0.950							0.950				
Satd. Flow (prot)	1719	1810	0	0	1729	1475	1752	3466	0	0	0	0
Flt Permitted	0.285						0.950					
Satd. Flow (perm)	516	1810	0	0	1729	1475	1752	3466	0	0	0	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					4	93		9				
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		236			714			600			597	
Travel Time (s)		5.4			16.2			13.6			13.6	
Peak Hour Factor	0.85	0.85	0.85	0.90	0.90	0.90	0.90	0.90	0.90	0.95	0.95	0.90
Growth Factor	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%
Heavy Vehicles (%)	5%	5%	5%	4%	4%	4%	3%	3%	3%	2%	2%	2%
Adj. Flow (vph)	36	601	0	0	556	166	97	370	28	0	0	0
Shared Lane Traffic (%)						10%						
Lane Group Flow (vph)	36	601	0	0	573	149	97	398	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	2			2	1	1	1				
Detector Template	Left	Thru			Thru		Left					
Leading Detector (ft)	20	100			100	50	20	50				
Trailing Detector (ft)	0	0			0	0	0	0				
Detector 1 Position(ft)	0	0			0	0	0	0				
Detector 1 Size(ft)	20	6			6	50	20	50				
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex				
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0	0.0	0.0	0.0				
Detector 1 Queue (s)	0.0	0.0			0.0	0.0	0.0	0.0				
Detector 1 Delay (s)	0.0	0.0			0.0	0.0	0.0	0.0				
Detector 2 Position(ft)		94			94							
Detector 2 Size(ft)		6			6							
Detector 2 Type		Cl+Ex			Cl+Ex							
Detector 2 Channel												
Detector 2 Extend (s)		0.0			0.0							
Turn Type	D.Pm	NA			NA	Perm	Perm	NA				
Protected Phases					4			2				

# Lanes, Volumes, Timings

246: Union & Monroe

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Permitted Phases	4	4				4	2					
Detector Phase	4	4			4	4	2	2				
Switch Phase												
Minimum Initial (s)	3.0	3.0			3.0	3.0	9.0	9.0				
Minimum Split (s)	25.0	25.0			25.0	25.0	22.0	22.0				
Total Split (s)	54.0	54.0			54.0	54.0	26.0	26.0				
Total Split (%)	67.5%	67.5%			67.5%	67.5%	32.5%	32.5%				
Maximum Green (s)	49.0	49.0			49.0	49.0	21.0	21.0				
Yellow Time (s)	5.0	5.0			5.0	5.0	4.0	4.0				
All-Red Time (s)	0.0	0.0			0.0	0.0	1.0	1.0				
Lost Time Adjust (s)	0.0	0.0			0.0	0.0	0.0	0.0				
Total Lost Time (s)	5.0	5.0			5.0	5.0	5.0	5.0				
Lead/Lag												
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0			3.0	3.0	4.0	4.0				
Recall Mode	None	None			None	None	Max	Max				
Walk Time (s)	5.0	5.0			5.0	5.0	7.0	7.0				
Flash Dont Walk (s)	15.0	15.0			15.0	15.0	8.0	8.0				
Pedestrian Calls (#/hr)	0	0			0	0	0	0				
Act Effect Green (s)	31.5	31.5			31.5	31.5	21.6	21.6				
Actuated g/C Ratio	0.50	0.50			0.50	0.50	0.34	0.34				
v/c Ratio	0.14	0.67			0.67	0.19	0.16	0.34				
Control Delay	8.8	15.3			15.3	3.8	19.8	18.8				
Queue Delay	0.0	0.0			0.0	0.0	0.0	0.0				
Total Delay	8.8	15.3			15.3	3.8	19.8	18.8				
LOS	A	B			B	A	B	B				
Approach Delay		14.9			12.9			19.0				
Approach LOS		B			B			B				

## Intersection Summary

Area Type: Other

Cycle Length: 80

Actuated Cycle Length: 63.5

Natural Cycle: 50

Control Type: Semi Act-Uncoord

Maximum v/c Ratio: 0.67

Intersection Signal Delay: 15.2

Intersection LOS: B

Intersection Capacity Utilization 47.7%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 246: Union & Monroe





Lane Group	EBL	EBR	NBL	NBT	SBT	SBR	Ø2
Lane Configurations	↑↑		↑	↑↑			
Volume (vph)	70	0	136	154	0	0	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Storage Length (ft)	0	0	200				0
Storage Lanes	2	0	1				0
Taper Length (ft)	25		25				
Lane Util. Factor	0.97	1.00	1.00	0.95	1.00	1.00	
Frt							
Flt Protected	0.950			0.950			
Satd. Flow (prot)	3367	0	1770	3539	0	0	
Flt Permitted	0.950			0.950			
Satd. Flow (perm)	3367	0	1770	3539	0	0	
Right Turn on Red		Yes			Yes		
Satd. Flow (RTOR)							
Link Speed (mph)	30			30	30		
Link Distance (ft)	136			556	451		
Travel Time (s)	3.1			12.6	10.3		
Peak Hour Factor	0.90	0.90	0.95	0.95	0.90	0.90	
Growth Factor	113%	113%	113%	113%	113%	113%	
Heavy Vehicles (%)	4%	2%	2%	2%	2%	2%	
Adj. Flow (vph)	88	0	162	183	0	0	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	88	0	162	183	0	0	
Enter Blocked Intersection	No	No	No	No	No	No	
Lane Alignment	Left	Right	Left	Left	Left	Right	
Median Width(ft)	24			12	12		
Link Offset(ft)	0			0	0		
Crosswalk Width(ft)	16			16	16		
Two way Left Turn Lane							
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15	9	15			9	
Number of Detectors	1		1	1			
Detector Template							
Leading Detector (ft)	50		50	50			
Trailing Detector (ft)	0		0	0			
Detector 1 Position(ft)	0		0	0			
Detector 1 Size(ft)	50		50	50			
Detector 1 Type	Cl+Ex		Cl+Ex	Cl+Ex			
Detector 1 Channel							
Detector 1 Extend (s)	0.0		0.0	0.0			
Detector 1 Queue (s)	0.0		0.0	0.0			
Detector 1 Delay (s)	0.0		0.0	0.0			
Turn Type	Prot		Prot	NA			
Protected Phases	1		3	2 3		2	
Permitted Phases							
Detector Phase	1		3	2 3			
Switch Phase							
Minimum Initial (s)	7.0		6.0			10.0	
Minimum Split (s)	21.0		24.0			28.0	



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR	ø2
Total Split (s)	22.0		39.0				39.0
Total Split (%)	22.0%		39.0%				39%
Maximum Green (s)	16.0		34.0				34.0
Yellow Time (s)	4.0		4.0				4.0
All-Red Time (s)	2.0		1.0				1.0
Lost Time Adjust (s)	0.0		0.0				
Total Lost Time (s)	6.0		5.0				
Lead/Lag	Lead						Lag
Lead-Lag Optimize?							
Vehicle Extension (s)	2.0		4.0				3.0
Recall Mode	C-Max		None				None
Walk Time (s)	7.0						7.0
Flash Dont Walk (s)	8.0						15.0
Pedestrian Calls (#/hr)	0						0
Act Effct Green (s)	55.7		16.3		33.3		
Actuated g/C Ratio	0.56		0.16		0.33		
v/c Ratio	0.05		0.56		0.16		
Control Delay	1.4		45.2		22.3		
Queue Delay	0.4		0.0		0.0		
Total Delay	1.7		45.2		22.3		
LOS	A		D		C		
Approach Delay	1.7				33.0		
Approach LOS	A				C		

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 54 (54%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.60

Intersection Signal Delay: 26.7

Intersection LOS: C

Intersection Capacity Utilization 23.5%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2592: Union & Broad





Lane Group	EBL	EBR	NBL	NBT	SBT	SBR	ø2
Lane Configurations	↖↖		↗	↑↑			
Volume (vph)	250	0	56	170	0	0	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Storage Length (ft)	0	0	200			0	
Storage Lanes	2	0	1			0	
Taper Length (ft)	25		25				
Lane Util. Factor	0.97	1.00	1.00	0.95	1.00	1.00	
Frt							
Flt Protected	0.950			0.950			
Satd. Flow (prot)	3433	0	1787	3574	0	0	
Flt Permitted	0.950			0.950			
Satd. Flow (perm)	3433	0	1787	3574	0	0	
Right Turn on Red		Yes			Yes		
Satd. Flow (RTOR)							
Link Speed (mph)	30			30	30		
Link Distance (ft)	175			499	451		
Travel Time (s)	4.0			11.3	10.3		
Peak Hour Factor	0.88	0.88	0.86	0.86	0.90	0.90	
Growth Factor	113%	113%	113%	113%	113%	113%	
Heavy Vehicles (%)	2%	2%	1%	1%	2%	2%	
Adj. Flow (vph)	321	0	74	223	0	0	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	321	0	74	223	0	0	
Enter Blocked Intersection	No	No	No	No	No	No	
Lane Alignment	Left	Right	Left	Left	Left	Right	
Median Width(ft)	24			12	12		
Link Offset(ft)	0			0	0		
Crosswalk Width(ft)	16			16	16		
Two way Left Turn Lane							
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	
Turning Speed (mph)	15	9	15			9	
Number of Detectors	1		1	1			
Detector Template							
Leading Detector (ft)	50		50	50			
Trailing Detector (ft)	0		0	0			
Detector 1 Position(ft)	0		0	0			
Detector 1 Size(ft)	50		50	50			
Detector 1 Type	Cl+Ex		Cl+Ex	Cl+Ex			
Detector 1 Channel							
Detector 1 Extend (s)	0.0		0.0	0.0			
Detector 1 Queue (s)	0.0		0.0	0.0			
Detector 1 Delay (s)	0.0		0.0	0.0			
Turn Type	Prot		Prot	NA			
Protected Phases	1		3	2 3		2	
Permitted Phases							
Detector Phase	1		3	2 3			
Switch Phase							
Minimum Initial (s)	7.0		6.0			10.0	
Minimum Split (s)	21.0		24.0			28.0	



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR	Ø2
Total Split (s)	31.0		24.0				45.0
Total Split (%)	31.0%		24.0%				45%
Maximum Green (s)	25.0		19.0				40.0
Yellow Time (s)	4.0		4.0				4.0
All-Red Time (s)	2.0		1.0				1.0
Lost Time Adjust (s)	0.0		0.0				
Total Lost Time (s)	6.0		5.0				
Lead/Lag	Lead						Lag
Lead-Lag Optimize?							
Vehicle Extension (s)	2.0		4.0				3.0
Recall Mode	C-Max		None				None
Walk Time (s)	7.0						7.0
Flash Dont Walk (s)	8.0						15.0
Pedestrian Calls (#/hr)	0						0
Act Effct Green (s)	60.7		11.0	28.3			
Actuated g/C Ratio	0.61		0.11	0.28			
v/c Ratio	0.15		0.38	0.22			
Control Delay	3.4		45.7	26.8			
Queue Delay	0.4		0.0	0.0			
Total Delay	3.8		45.7	26.8			
LOS	A		D	C			
Approach Delay	3.8			31.5			
Approach LOS	A			C			

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 25 (25%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.55

Intersection Signal Delay: 17.1

Intersection LOS: B

Intersection Capacity Utilization 25.6%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2592: Union & Broad





Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑↑	↑		↖↑					↖↑↑		
Volume (vph)	0	67	31	23	115	0	0	0	0	3	156	177
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	0.91	0.91	0.91
Fr <sub>t</sub>				0.850								0.921
Flt Protected						0.992						
Satd. Flow (prot)	0	3471	1553	0	3511	0	0	0	0	0	4684	0
Flt Permitted						0.913						
Satd. Flow (perm)	0	3471	1553	0	3231	0	0	0	0	0	4684	0
Right Turn on Red				Yes		Yes				Yes		Yes
Satd. Flow (RTOR)				76								244
Link Speed (mph)		30			30			30				30
Link Distance (ft)		786			136			477				435
Travel Time (s)		17.9			3.1			10.8				9.9
Peak Hour Factor	0.78	0.78	0.78	0.85	0.85	0.85	0.90	0.90	0.90	0.82	0.82	0.82
Growth Factor	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%
Heavy Vehicles (%)	4%	4%	4%	2%	2%	2%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	0	97	45	31	153	0	0	0	0	4	215	244
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	97	45	0	184	0	0	0	0	0	463	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)	0				0			0				0
Link Offset(ft)	0				0			0				0
Crosswalk Width(ft)	16				16			16				16
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors		1	1	1	1					1	1	
Detector Template												
Leading Detector (ft)	50	50	50	50						50	50	
Trailing Detector (ft)	0	0	0	0						0	0	
Detector 1 Position(ft)	0	0	0	0						0	0	
Detector 1 Size(ft)	50	50	50	50						50	50	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex						Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0						0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0						0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0						0.0	0.0	
Turn Type	NA	Perm	D.P+P	NA						Split	NA	
Protected Phases	1		3	1 3						2	2	
Permitted Phases		1	1									
Detector Phase	1	1	3	1 3						2	2	
Switch Phase												
Minimum Initial (s)	7.0	7.0	6.0							10.0	10.0	
Minimum Split (s)	21.0	21.0	24.0							28.0	28.0	
Total Split (s)	22.0	22.0	39.0							39.0	39.0	
Total Split (%)	22.0%	22.0%	39.0%							39.0%	39.0%	
Maximum Green (s)	16.0	16.0	34.0							34.0	34.0	



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Yellow Time (s)		4.0	4.0	4.0						4.0	4.0	
All-Red Time (s)		2.0	2.0	1.0						1.0	1.0	
Lost Time Adjust (s)		0.0	0.0							0.0		
Total Lost Time (s)		6.0	6.0							5.0		
Lead/Lag		Lead	Lead							Lag	Lag	
Lead-Lag Optimize?												
Vehicle Extension (s)		2.0	2.0	4.0						3.0	3.0	
Recall Mode	C-Max	C-Max	None							None	None	
Walk Time (s)	7.0	7.0								7.0	7.0	
Flash Dont Walk (s)	8.0	8.0								15.0	15.0	
Pedestrian Calls (#/hr)	0	0								0	0	
Act Effect Green (s)	55.7	55.7		71.0						12.0		
Actuated g/C Ratio	0.56	0.56		0.71						0.12		
v/c Ratio	0.05	0.05		0.08						0.60		
Control Delay	7.0	3.4		0.6						10.6		
Queue Delay	0.0	0.0		0.2						0.0		
Total Delay	7.0	3.4		0.8						10.6		
LOS	A	A		A						B		
Approach Delay	5.9			0.8						10.6		
Approach LOS	A			A						B		

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 54 (54%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.60

Intersection Signal Delay: 7.4

Intersection LOS: A

Intersection Capacity Utilization 34.2%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2591: Pitkin & Broad



Lanes, Volumes, Timings  
2591: Pitkin & Broad

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	0	235	139	44	29	0	0	0	0	15	196	52
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	1.00	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	0.91	0.91	0.91
Fr <sub>t</sub>						0.850						0.970
Flt Protected							0.971					0.997
Satd. Flow (prot)	0	3539	1583	0	3437	0	0	0	0	0	4918	0
Flt Permitted						0.715						0.997
Satd. Flow (perm)	0	3539	1583	0	2531	0	0	0	0	0	4918	0
Right Turn on Red				Yes		Yes			Yes			Yes
Satd. Flow (RTOR)				209								71
Link Speed (mph)		30			30			30				30
Link Distance (ft)		750			175			248				439
Travel Time (s)		17.0			4.0			5.6				10.0
Peak Hour Factor	0.75	0.75	0.75	0.77	0.77	0.77	0.90	0.90	0.90	0.82	0.82	0.82
Growth Factor	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%
Adj. Flow (vph)	0	354	209	65	43	0	0	0	0	21	270	72
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	354	209	0	108	0	0	0	0	0	363	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			0				0
Link Offset(ft)		0			0			0				0
Crosswalk Width(ft)		16			16			16				16
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors		1	1	1	1					1	1	
Detector Template												
Leading Detector (ft)		50	50	50	50					50	50	
Trailing Detector (ft)		0	0	0	0					0	0	
Detector 1 Position(ft)		0	0	0	0					0	0	
Detector 1 Size(ft)		50	50	50	50					50	50	
Detector 1 Type		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex					Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Detector 1 Queue (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Detector 1 Delay (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Turn Type	NA	Perm	D.P+P	NA						Split	NA	
Protected Phases		1		3	1 3					2	2	
Permitted Phases			1	1								
Detector Phase		1	1	3	1 3					2	2	
Switch Phase												
Minimum Initial (s)		7.0	7.0	6.0						10.0	10.0	
Minimum Split (s)		21.0	21.0	24.0						28.0	28.0	
Total Split (s)		31.0	31.0	24.0						45.0	45.0	
Total Split (%)		31.0%	31.0%	24.0%						45.0%	45.0%	
Maximum Green (s)		25.0	25.0	19.0						40.0	40.0	
Yellow Time (s)		4.0	4.0	4.0						4.0	4.0	



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
All-Red Time (s)	2.0	2.0		1.0						1.0	1.0	
Lost Time Adjust (s)	0.0	0.0									0.0	
Total Lost Time (s)	6.0	6.0									5.0	
Lead/Lag	Lead	Lead								Lag	Lag	
Lead-Lag Optimize?												
Vehicle Extension (s)	2.0	2.0	4.0							3.0	3.0	
Recall Mode	C-Max	C-Max	None							None	None	
Walk Time (s)	7.0	7.0								7.0	7.0	
Flash Dont Walk (s)	8.0	8.0								15.0	15.0	
Pedestrian Calls (#/hr)	0	0								0	0	
Act Effct Green (s)	60.7	60.7		70.7						12.3		
Actuated g/C Ratio	0.61	0.61		0.71						0.12		
v/c Ratio	0.16	0.20	0.06							0.55		
Control Delay	6.4	0.6	1.2							31.5		
Queue Delay	0.0	0.0	0.1							0.0		
Total Delay	6.4	0.6	1.3							31.5		
LOS	A	A	A							C		
Approach Delay	4.3		1.3							31.5		
Approach LOS	A		A							C		

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 25 (25%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.55

Intersection Signal Delay: 13.5

Intersection LOS: B

Intersection Capacity Utilization 38.1%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2591: Pitkin & Broad



Lanes, Volumes, Timings  
2602: Union & East

1/7/2014




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	24	332	0	0	450	67	68	84	65	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	0.95	0.95	1.00	1.00	0.95	0.95	0.95	0.95	1.00	1.00	1.00	1.00
Fr <sub>t</sub>						0.981				0.850		
Flt Protected		0.997							0.978			
Satd. Flow (prot)	0	3461	0	0	3405	0	0	3362	1538	0	0	0
Flt Permitted		0.897							0.978			
Satd. Flow (perm)	0	3114	0	0	3405	0	0	3362	1538	0	0	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					22				87			
Link Speed (mph)		30			30			30		30		
Link Distance (ft)		123			667			451		780		
Travel Time (s)		2.8			15.2			10.3		17.7		
Peak Hour Factor	0.76	0.76	0.76	0.93	0.93	0.93	0.94	0.94	0.94	0.90	0.90	0.90
Growth Factor	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%	5%	5%	5%	2%	2%	2%
Adj. Flow (vph)	36	494	0	0	547	81	82	101	78	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	530	0	0	628	0	0	183	78	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)	0				0			0		0		0
Link Offset(ft)	0				0			0		0		0
Crosswalk Width(ft)	16				16			16		16		
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1			1		1	1	1			
Detector Template												
Leading Detector (ft)	50	50			50		50	50	50			
Trailing Detector (ft)	0	0			0		0	0	0			
Detector 1 Position(ft)	0	0			0		0	0	0			
Detector 1 Size(ft)	50	50			50		50	50	50			
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex			
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0		0.0	0.0	0.0			
Detector 1 Queue (s)	0.0	0.0			0.0		0.0	0.0	0.0			
Detector 1 Delay (s)	0.0	0.0			0.0		0.0	0.0	0.0			
Turn Type	pm+pt	NA			NA		Split	NA	Perm			
Protected Phases	2	1 2			1		3	3				
Permitted Phases	1 2								3			
Detector Phase	2	1 2			1		3	3	3			
Switch Phase												
Minimum Initial (s)	6.0				6.0		6.0	6.0	6.0			
Minimum Split (s)	23.0				23.0		22.0	22.0	22.0			
Total Split (s)	26.0				52.0		22.0	22.0	22.0			
Total Split (%)	26.0%				52.0%		22.0%	22.0%	22.0%			
Maximum Green (s)	20.5				46.5		16.5	16.5	16.5			

# Lanes, Volumes, Timings

2602: Union & East

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Yellow Time (s)	3.5				3.5		3.5	3.5	3.5			
All-Red Time (s)	2.0				2.0		2.0	2.0	2.0			
Lost Time Adjust (s)					0.0			0.0	0.0			
Total Lost Time (s)					5.5			5.5	5.5			
Lead/Lag	Lag				Lead							
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0				2.0		3.0	3.0	3.0			
Recall Mode	None				C-Max		None	None	None			
Walk Time (s)	7.0				7.0		7.0	7.0	7.0			
Flash Dont Walk (s)	9.0				10.0		9.0	9.0	9.0			
Pedestrian Calls (#/hr)	0				0		0	0	0			
Act Effect Green (s)	70.4				51.8			13.1	13.1			
Actuated g/C Ratio	0.70				0.52			0.13	0.13			
v/c Ratio	0.23				0.35			0.42	0.28			
Control Delay	1.5				6.9			33.8	9.6			
Queue Delay	0.5				0.0			0.0	0.0			
Total Delay	2.0				6.9			33.8	9.6			
LOS	A				A			C	A			
Approach Delay	2.0				6.9			26.6				
Approach LOS	A				A			C				

## Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 16 (16%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.75

Intersection Signal Delay: 8.7


Intersection LOS: A

Intersection Capacity Utilization 45.1%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2602: Union & East

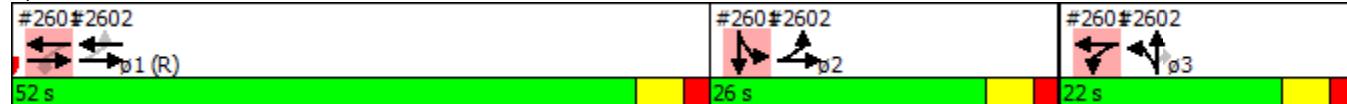

Lanes, Volumes, Timings  
2602: Union & East

1/7/2014




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	36	609	0	0	347	57	43	166	211	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	0.95	0.95	1.00	1.00	0.95	0.95	0.95	0.95	1.00	1.00	1.00	1.00
Fr <sub>t</sub>						0.979				0.850		
Flt Protected		0.997							0.990			
Satd. Flow (prot)	0	3529	0	0	3431	0	0	3504	1583	0	0	0
Flt Permitted		0.907							0.990			
Satd. Flow (perm)	0	3210	0	0	3431	0	0	3504	1583	0	0	0
Right Turn on Red			Yes				Yes			Yes		Yes
Satd. Flow (RTOR)						19				191		
Link Speed (mph)		30				30			30		30	
Link Distance (ft)		148				667			451		567	
Travel Time (s)		3.4				15.2			10.3		12.9	
Peak Hour Factor	0.86	0.86	0.86	0.87	0.87	0.87	0.90	0.90	0.90	0.90	0.90	0.90
Growth Factor	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%
Heavy Vehicles (%)	2%	2%	2%	3%	3%	3%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	47	800	0	0	451	74	54	208	265	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	847	0	0	525	0	0	262	265	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)	0				0			0		0		0
Link Offset(ft)	0				0			0		0		0
Crosswalk Width(ft)	16				16			16		16		16
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1			1		1	1	1			
Detector Template												
Leading Detector (ft)	50	50			50		50	50	50			
Trailing Detector (ft)	0	0			0		0	0	0			
Detector 1 Position(ft)	0	0			0		0	0	0			
Detector 1 Size(ft)	50	50			50		50	50	50			
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex			
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0		0.0	0.0	0.0			
Detector 1 Queue (s)	0.0	0.0			0.0		0.0	0.0	0.0			
Detector 1 Delay (s)	0.0	0.0			0.0		0.0	0.0	0.0			
Turn Type	pm+pt	NA			NA		Split	NA	Perm			
Protected Phases	2	1 2			1		3	3				
Permitted Phases	1 2								3			
Detector Phase	2	1 2			1		3	3	3			
Switch Phase												
Minimum Initial (s)	6.0				6.0		6.0	6.0	6.0			
Minimum Split (s)	23.0				23.0		22.0	22.0	22.0			
Total Split (s)	36.0				35.0		29.0	29.0	29.0			
Total Split (%)	36.0%				35.0%		29.0%	29.0%	29.0%			
Maximum Green (s)	30.5				29.5		23.5	23.5	23.5			

## Lanes, Volumes, Timings

2602: Union & East

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Yellow Time (s)	3.5				3.5		3.5	3.5	3.5			
All-Red Time (s)	2.0				2.0		2.0	2.0	2.0			
Lost Time Adjust (s)					0.0			0.0	0.0			
Total Lost Time (s)					5.5			5.5	5.5			
Lead/Lag	Lag				Lead							
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0				2.0		3.0	3.0	3.0			
Recall Mode	None				C-Max		None	None	None			
Walk Time (s)	7.0				7.0		7.0	7.0	7.0			
Flash Dont Walk (s)	9.0				10.0		9.0	9.0	9.0			
Pedestrian Calls (#/hr)	0				0		0	0	0			
Act Effect Green (s)	68.0				45.4			15.5	15.5			
Actuated g/C Ratio	0.68				0.45			0.16	0.16			
v/c Ratio	0.38				0.34			0.48	0.65			
Control Delay	1.4				29.1			36.6	19.1			
Queue Delay	0.1				0.0			0.0	0.0			
Total Delay	1.5				29.1			36.6	19.1			
LOS	A				C			D	B			
Approach Delay	1.5				29.1			27.8				
Approach LOS	A				C			C				

### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 94 (94%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.65

Intersection Signal Delay: 16.4

Intersection LOS: B

Intersection Capacity Utilization 53.4%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2602: Union & East



Lanes, Volumes, Timings  
2601: Pitkin & East


1/7/2014

Lane Group	EBL	EBT	EBC	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	0	189	30	138	353	0	0	0	0	171	168	29
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		125	0		0	0	0	0	0	0	0
Storage Lanes	0		1	0		0	0	0	0	1		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	0.95	0.95
Frt				0.850							0.978	
Flt Protected					0.986						0.950	
Satd. Flow (prot)	0	3471	1553	0	3423	0	0	0	0	1736	3395	0
Flt Permitted					0.779						0.950	
Satd. Flow (perm)	0	3471	1553	0	2704	0	0	0	0	1736	3395	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			87									18
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		788			123			435			516	
Travel Time (s)		17.9			2.8			9.9			11.7	
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.90	0.90	0.90	0.80	0.80	0.80
Growth Factor	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%	2%	2%	2%	4%	4%	4%
Adj. Flow (vph)	0	225	36	164	420	0	0	0	0	242	237	41
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	225	36	0	584	0	0	0	0	242	278	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors		1	1	1	1					1	1	
Detector Template												
Leading Detector (ft)		50	50	50	50					50	50	
Trailing Detector (ft)		0	0	0	0					0	0	
Detector 1 Position(ft)		0	0	0	0					0	0	
Detector 1 Size(ft)		50	50	50	50					50	50	
Detector 1 Type		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex					Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Detector 1 Queue (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Detector 1 Delay (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Turn Type	NA	Perm	pm+pt	NA						Split	NA	
Protected Phases	1		3	1 3						2	2	
Permitted Phases		1	1 3									
Detector Phase	1	1	3	1 3						2	2	
Switch Phase												
Minimum Initial (s)		6.0	6.0	6.0						6.0	6.0	
Minimum Split (s)		23.0	23.0	22.0						23.0	23.0	

## Lanes, Volumes, Timings

2601: Pitkin &amp; East

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (s)		52.0	52.0	22.0						26.0	26.0	
Total Split (%)		52.0%	52.0%	22.0%						26.0%	26.0%	
Maximum Green (s)		46.5	46.5	16.5						20.5	20.5	
Yellow Time (s)		3.5	3.5	3.5						3.5	3.5	
All-Red Time (s)		2.0	2.0	2.0						2.0	2.0	
Lost Time Adjust (s)		0.0	0.0							0.0	0.0	
Total Lost Time (s)		5.5	5.5							5.5	5.5	
Lead/Lag	Lead	Lead								Lag	Lag	
Lead-Lag Optimize?												
Vehicle Extension (s)		2.0	2.0	3.0						3.0	3.0	
Recall Mode	C-Max	C-Max	None							None	None	
Walk Time (s)		7.0	7.0	7.0						7.0	7.0	
Flash Dont Walk (s)		10.0	10.0	9.0						9.0	9.0	
Pedestrian Calls (#/hr)		0	0	0						0	0	
Act Effct Green (s)		51.8	51.8	64.9						18.6	18.6	
Actuated g/C Ratio		0.52	0.52	0.65						0.19	0.19	
v/c Ratio		0.13	0.04	0.32						0.75	0.43	
Control Delay		13.4	2.2	1.2						52.5	34.6	
Queue Delay		0.0	0.0	0.2						0.0	0.0	
Total Delay		13.4	2.2	1.4						52.5	34.6	
LOS	B	A	A							D	C	
Approach Delay		11.8		1.4							42.9	
Approach LOS		B		A							D	

## Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 16 (16%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.75

Intersection Signal Delay: 19.2


Intersection LOS: B

Intersection Capacity Utilization 45.9%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2601: Pitkin &amp; East

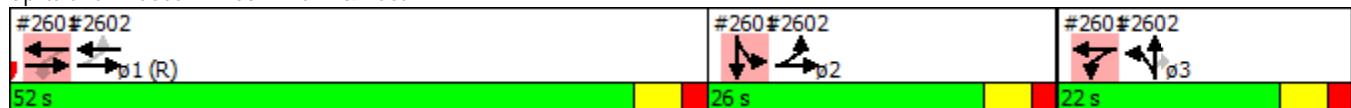

Lanes, Volumes, Timings  
2601: Pitkin & East

1/7/2014




Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	0	445	51	78	316	0	0	0	0	197	114	27
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		125	0		0	0	0	0	0	0	0
Storage Lanes	0		1	0		0	0	0	0	1	0	0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.95	1.00	0.95	0.95	1.00	1.00	1.00	1.00	1.00	0.95	0.95
Frt				0.850							0.972	
Flt Protected					0.990						0.950	
Satd. Flow (prot)	0	3539	1583	0	3470	0	0	0	0	1770	3440	0
Flt Permitted					0.755						0.950	
Satd. Flow (perm)	0	3539	1583	0	2646	0	0	0	0	1770	3440	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)			87									29
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		763			148			439			686	
Travel Time (s)		17.3			3.4			10.0			15.6	
Peak Hour Factor	0.92	0.92	0.92	0.93	0.93	0.93	0.90	0.90	0.90	0.89	0.89	0.89
Growth Factor	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%
Heavy Vehicles (%)	2%	2%	2%	3%	3%	3%	2%	2%	2%	2%	2%	2%
Adj. Flow (vph)	0	547	63	95	384	0	0	0	0	250	145	34
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	547	63	0	479	0	0	0	0	250	179	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		0			0			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors		1	1	1	1					1	1	
Detector Template												
Leading Detector (ft)		50	50	50	50					50	50	
Trailing Detector (ft)		0	0	0	0					0	0	
Detector 1 Position(ft)		0	0	0	0					0	0	
Detector 1 Size(ft)		50	50	50	50					50	50	
Detector 1 Type		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex					Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Detector 1 Queue (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Detector 1 Delay (s)		0.0	0.0	0.0	0.0					0.0	0.0	
Turn Type	NA	Perm	pm+pt	NA						Split	NA	
Protected Phases	1		3	1 3						2	2	
Permitted Phases		1	1 3									
Detector Phase	1	1	3	1 3						2	2	
Switch Phase												
Minimum Initial (s)		6.0	6.0	6.0						6.0	6.0	
Minimum Split (s)		23.0	23.0	22.0						23.0	23.0	

## Lanes, Volumes, Timings

2601: Pitkin &amp; East

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (s)	35.0	35.0	29.0							36.0	36.0	
Total Split (%)	35.0%	35.0%	29.0%							36.0%	36.0%	
Maximum Green (s)	29.5	29.5	23.5							30.5	30.5	
Yellow Time (s)	3.5	3.5	3.5							3.5	3.5	
All-Red Time (s)	2.0	2.0	2.0							2.0	2.0	
Lost Time Adjust (s)	0.0	0.0								0.0	0.0	
Total Lost Time (s)	5.5	5.5								5.5	5.5	
Lead/Lag	Lead	Lead								Lag	Lag	
Lead-Lag Optimize?												
Vehicle Extension (s)	2.0	2.0	3.0							3.0	3.0	
Recall Mode	C-Max	C-Max	None							None	None	
Walk Time (s)	7.0	7.0	7.0							7.0	7.0	
Flash Dont Walk (s)	10.0	10.0	9.0							9.0	9.0	
Pedestrian Calls (#/hr)	0	0	0							0	0	
Act Effct Green (s)	45.4	45.4		60.9						22.6	22.6	
Actuated g/C Ratio	0.45	0.45		0.61						0.23	0.23	
v/c Ratio	0.34	0.08		0.28						0.62	0.22	
Control Delay	15.4	1.2		5.8						43.8	27.8	
Queue Delay	0.0	0.0		0.1						0.0	0.0	
Total Delay	15.4	1.2		5.9						43.8	27.8	
LOS	B	A		A						D	C	
Approach Delay	13.9			5.9							37.1	
Approach LOS	B			A							D	

## Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 94 (94%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.65

Intersection Signal Delay: 18.0

Intersection LOS: B

Intersection Capacity Utilization 52.4%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 2601: Pitkin &amp; East



Lanes, Volumes, Timings  
3044: Union & University

1/7/2014

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	9	353	0	0	470	37	118	152	60	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	0.95	0.95	1.00	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00
Fr <sub>t</sub>						0.989			0.958			
Flt Protected		0.999						0.950				
Satd. Flow (prot)	0	3468	0	0	3368	0	1703	3263	0	0	0	0
Flt Permitted		0.935						0.950				
Satd. Flow (perm)	0	3246	0	0	3368	0	1703	3263	0	0	0	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					12			63				
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		316			584			383			361	
Travel Time (s)		7.2			13.3			8.7			8.2	
Peak Hour Factor	0.88	0.88	0.88	0.92	0.92	0.92	0.90	0.90	0.90	0.90	0.90	0.90
Growth Factor	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%
Heavy Vehicles (%)	4%	4%	4%	6%	6%	6%	6%	6%	6%	2%	2%	2%
Adj. Flow (vph)	12	453	0	0	577	45	148	191	75	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	465	0	0	622	0	148	266	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)	0				0			12			12	
Link Offset(ft)	0				0			0			0	
Crosswalk Width(ft)	16				16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1			1		1	1				
Detector Template												
Leading Detector (ft)	50	50			50		50	50				
Trailing Detector (ft)	0	0			0		0	0				
Detector 1 Position(ft)	0	0			0		0	0				
Detector 1 Size(ft)	50	50			50		50	50				
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex		Cl+Ex	Cl+Ex				
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0		0.0	0.0				
Detector 1 Queue (s)	0.0	0.0			0.0		0.0	0.0				
Detector 1 Delay (s)	0.0	0.0			0.0		0.0	0.0				
Turn Type	custom	NA			NA		Split	NA				
Protected Phases	2 3				2 3		1	1				
Permitted Phases	2				2 3							
Detector Phase	2	2 3			2 3		1	1				
Switch Phase												
Minimum Initial (s)	6.0						7.0	7.0				
Minimum Split (s)	15.0						30.0	30.0				
Total Split (s)	32.0						40.0	40.0				
Total Split (%)	32.0%						40.0%	40.0%				
Maximum Green (s)	26.0						34.0	34.0				

Lane Group	ø3
Lane Configurations	
Volume (vph)	
Ideal Flow (vphpl)	
Lane Util. Factor	
Fr <sub>t</sub>	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Right Turn on Red	
Satd. Flow (RTOR)	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Growth Factor	
Heavy Vehicles (%)	
Adj. Flow (vph)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Enter Blocked Intersection	
Lane Alignment	
Median Width(ft)	
Link Offset(ft)	
Crosswalk Width(ft)	
Two way Left Turn Lane	
Headway Factor	
Turning Speed (mph)	
Number of Detectors	
Detector Template	
Leading Detector (ft)	
Trailing Detector (ft)	
Detector 1 Position(ft)	
Detector 1 Size(ft)	
Detector 1 Type	
Detector 1 Channel	
Detector 1 Extend (s)	
Detector 1 Queue (s)	
Detector 1 Delay (s)	
Turn Type	
Protected Phases	3
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	6.0
Minimum Split (s)	15.0
Total Split (s)	28.0
Total Split (%)	28%
Maximum Green (s)	21.5

# Lanes, Volumes, Timings

## 3044: Union & University

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Yellow Time (s)	3.5						3.5	3.5				
All-Red Time (s)	2.5						2.5	2.5				
Lost Time Adjust (s)							0.0	0.0				
Total Lost Time (s)							6.0	6.0				
Lead/Lag	Lag						Lead	Lead				
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0						3.0	3.0				
Recall Mode	None						C-Max	C-Max				
Walk Time (s)							7.0	7.0				
Flash Dont Walk (s)							16.0	16.0				
Pedestrian Calls (#/hr)							0	0				
Act Effect Green (s)	54.0			54.0			34.0	34.0				
Actuated g/C Ratio	0.54			0.54			0.34	0.34				
v/c Ratio	0.27			0.34			0.26	0.23				
Control Delay	4.6			3.6			20.3	13.5				
Queue Delay	0.5			0.0			0.0	0.0				
Total Delay	5.1			3.7			20.3	13.5				
LOS	A			A			C	B				
Approach Delay	5.1			3.7				15.9				
Approach LOS	A			A				B				

### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 38 (38%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.81

Intersection Signal Delay: 7.5

Intersection LOS: A

Intersection Capacity Utilization 35.7%

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 3044: Union & University



Lane Group	ø3
Yellow Time (s)	3.5
All-Red Time (s)	3.0
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Vehicle Extension (s)	3.0
Recall Mode	None
Walk Time (s)	
Flash Dont Walk (s)	
Pedestrian Calls (#/hr)	
Act Effect Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Intersection Summary	

Lanes, Volumes, Timings  
3044: Union & University

1/7/2014

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	6	526	0	0	424	30	208	237	116	0	0	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Util. Factor	0.95	0.95	1.00	1.00	0.95	0.95	1.00	0.95	0.95	1.00	1.00	1.00
Fr <sub>t</sub>					0.990				0.951			
Flt Protected		0.999						0.950				
Satd. Flow (prot)	0	3536	0	0	3539	0	1787	3399	0	0	0	0
Flt Permitted		0.946					0.950					
Satd. Flow (perm)	0	3348	0	0	3539	0	1787	3399	0	0	0	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					10			99				
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		298			584			576			361	
Travel Time (s)		6.8			13.3			13.1			8.2	
Peak Hour Factor	0.78	0.78	0.78	0.78	0.78	0.78	0.86	0.86	0.86	0.90	0.90	0.90
Growth Factor	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%
Heavy Vehicles (%)	2%	2%	2%	1%	1%	1%	1%	1%	1%	2%	2%	2%
Adj. Flow (vph)	9	762	0	0	614	43	273	311	152	0	0	0
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	771	0	0	657	0	273	463	0	0	0	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)	0				0			12			12	
Link Offset(ft)	0				0			0			0	
Crosswalk Width(ft)	16				16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1			1		1	1				
Detector Template												
Leading Detector (ft)	50	50			50		50	50				
Trailing Detector (ft)	0	0			0		0	0				
Detector 1 Position(ft)	0	0			0		0	0				
Detector 1 Size(ft)	50	50			50		50	50				
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex		Cl+Ex	Cl+Ex				
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0		0.0	0.0				
Detector 1 Queue (s)	0.0	0.0			0.0		0.0	0.0				
Detector 1 Delay (s)	0.0	0.0			0.0		0.0	0.0				
Turn Type	custom	NA			NA		Split	NA				
Protected Phases	2 3				2 3		1	1				
Permitted Phases	2				2 3							
Detector Phase	2	2 3			2 3		1	1				
Switch Phase												
Minimum Initial (s)	6.0						7.0	7.0				
Minimum Split (s)	15.0						30.0	30.0				
Total Split (s)	29.0						46.0	46.0				
Total Split (%)	29.0%						46.0%	46.0%				
Maximum Green (s)	23.0						40.0	40.0				

Lane Group	ø3
Lane Configurations	
Volume (vph)	
Ideal Flow (vphpl)	
Lane Util. Factor	
Fr <sub>t</sub>	
Flt Protected	
Satd. Flow (prot)	
Flt Permitted	
Satd. Flow (perm)	
Right Turn on Red	
Satd. Flow (RTOR)	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Growth Factor	
Heavy Vehicles (%)	
Adj. Flow (vph)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Enter Blocked Intersection	
Lane Alignment	
Median Width(ft)	
Link Offset(ft)	
Crosswalk Width(ft)	
Two way Left Turn Lane	
Headway Factor	
Turning Speed (mph)	
Number of Detectors	
Detector Template	
Leading Detector (ft)	
Trailing Detector (ft)	
Detector 1 Position(ft)	
Detector 1 Size(ft)	
Detector 1 Type	
Detector 1 Channel	
Detector 1 Extend (s)	
Detector 1 Queue (s)	
Detector 1 Delay (s)	
Turn Type	
Protected Phases	3
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	6.0
Minimum Split (s)	15.0
Total Split (s)	25.0
Total Split (%)	25%
Maximum Green (s)	18.5

## Lanes, Volumes, Timings 3044: Union & University

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Yellow Time (s)	3.5						3.5	3.5				
All-Red Time (s)	2.5						2.5	2.5				
Lost Time Adjust (s)							0.0	0.0				
Total Lost Time (s)							6.0	6.0				
Lead/Lag	Lag						Lead	Lead				
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0						3.0	3.0				
Recall Mode	None						C-Max	C-Max				
Walk Time (s)							7.0	7.0				
Flash Dont Walk (s)							16.0	16.0				
Pedestrian Calls (#/hr)							0	0				
Act Effct Green (s)	48.0			48.0			40.0	40.0				
Actuated g/C Ratio	0.48			0.48			0.40	0.40				
v/c Ratio	0.48			0.39			0.38	0.33				
Control Delay	9.1			11.1			28.5	21.4				
Queue Delay	1.9			0.1			0.0	0.0				
Total Delay	11.0			11.2			28.5	21.4				
LOS	B			B			C	C				
Approach Delay	11.0			11.2				24.1				
Approach LOS	B			B				C				

## Intersection Summary

Area Type: Other

Area Types:

Actuated Cycle Length: 100

Offset: 51 (51%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 80

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.95


Intersection LOS: B

Intersection Signal Delay: 15.5

ICU Level of Service A

Analysis Period (min) 15

Splits and Phases: 3044: Union & University

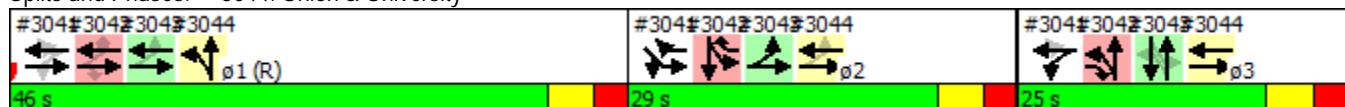

Lane Group	ø3
Yellow Time (s)	3.5
All-Red Time (s)	3.0
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Vehicle Extension (s)	3.0
Recall Mode	None
Walk Time (s)	
Flash Dont Walk (s)	
Pedestrian Calls (#/hr)	
Act Effect Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Intersection Summary	

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	9	292	148	1	680	445	239	369	3	425	341	10
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	125		0	0		0	0		0	250		250
Storage Lanes	1		1	0		1	1		0	1		1
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.91	0.91	0.95	0.95	1.00	0.91	0.91	0.95	0.91	0.91	0.95
Fr <sub>t</sub>		0.992	0.850			0.850		0.999			0.997	
Flt Protected	0.950						0.950	0.995		0.950	0.984	
Satd. Flow (prot)	1597	3036	1301	0	3312	1482	1579	3305	0	1507	3112	0
Flt Permitted	0.175				0.955		0.950	0.995		0.950	0.984	
Satd. Flow (perm)	294	3036	1301	0	3163	1482	1579	3305	0	1507	3112	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		6	130			43		1			2	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		297			291			316			393	
Travel Time (s)		6.8			6.6			7.2			8.9	
Peak Hour Factor	0.87	0.87	0.87	0.90	0.90	0.90	0.81	0.81	0.81	0.92	0.92	0.92
Growth Factor	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%
Heavy Vehicles (%)	13%	13%	13%	9%	9%	9%	4%	4%	4%	9%	9%	9%
Adj. Flow (vph)	12	379	192	1	854	559	333	515	4	522	419	12
Shared Lane Traffic (%)			11%				17%			40%		
Lane Group Flow (vph)	12	400	171	0	855	559	276	576	0	313	640	0
Enter Blocked Intersection	No											
Lane Alignment	Left	Left	Right									
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	1	1	1	1	1	1		1	1	
Detector Template												
Leading Detector (ft)	50	50	50	50	50	50	50	50		50	50	
Trailing Detector (ft)	0	0	0	0	0	0	0	0		0	0	
Detector 1 Position(ft)	0	0	0	0	0	0	0	0		0	0	
Detector 1 Size(ft)	50	50	50	50	50	50	50	50		50	50	
Detector 1 Type	Cl+Ex		Cl+Ex	Cl+Ex								
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0		0.0	0.0	
Turn Type	Perm	NA	pm+ov	Perm	NA	pm+ov	Split	NA		Split	NA	
Protected Phases		1	3		1	2	3	3		2	2	
Permitted Phases	1		1	1		1						
Detector Phase	1	1	3	1	1	2	3	3		2	2	
Switch Phase												
Minimum Initial (s)	7.0	7.0	6.0	7.0	7.0	6.0	6.0	6.0		6.0	6.0	
Minimum Split (s)	30.0	30.0	15.0	30.0	30.0	15.0	15.0	15.0		15.0	15.0	



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (s)	40.0	40.0	28.0	40.0	40.0	32.0	28.0	28.0		32.0	32.0	
Total Split (%)	40.0%	40.0%	28.0%	40.0%	40.0%	32.0%	28.0%	28.0%		32.0%	32.0%	
Maximum Green (s)	34.0	34.0	21.5	34.0	34.0	26.0	21.5	21.5		26.0	26.0	
Yellow Time (s)	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5		3.5	3.5	
All-Red Time (s)	2.5	2.5	3.0	2.5	2.5	2.5	3.0	3.0		2.5	2.5	
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.0	6.0	6.5		6.0	6.0	6.5	6.5		6.0	6.0	
Lead/Lag	Lead	Lead		Lead	Lead	Lag				Lag	Lag	
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0		3.0	3.0	
Recall Mode	C-Max	C-Max	None	C-Max	C-Max	None	None	None		None	None	
Walk Time (s)	7.0	7.0		7.0	7.0							
Flash Dont Walk (s)	16.0	16.0		16.0	16.0							
Pedestrian Calls (#/hr)	0	0		0	0							
Act Effct Green (s)	34.0	34.0	61.5		34.0	66.0	21.5	21.5		26.0	26.0	
Actuated g/C Ratio	0.34	0.34	0.62		0.34	0.66	0.22	0.22		0.26	0.26	
v/c Ratio	0.12	0.39	0.20		0.80	0.56	0.81	0.81		0.80	0.79	
Control Delay	25.8	23.5	6.3		11.7	5.8	52.1	42.1		51.6	42.6	
Queue Delay	0.0	0.4	0.4		0.3	5.7	0.8	1.1		0.0	0.0	
Total Delay	25.8	23.8	6.7		12.0	11.5	52.9	43.2		51.6	42.6	
LOS	C	C	A		B	B	D	D		D	D	
Approach Delay		18.9			11.8			46.3			45.5	
Approach LOS		B			B			D			D	

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 38 (38%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.81

Intersection Signal Delay: 29.1

Intersection LOS: C

Intersection Capacity Utilization 70.4%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 3042: University/IL WB & Main



	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	1	2	1	0	2	1	1	2	1	1	2	1
Volume (vph)	18	530	215	0	525	430	230	418	1	398	316	5
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	125		0	0		0	0		0	250		250
Storage Lanes	1		1	0		1	1		0	1		1
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.91	0.91	1.00	0.95	1.00	0.91	0.91	0.95	0.91	0.91	0.95
Fr <sub>t</sub>		0.994	0.850			0.850						0.998
Flt Protected	0.950						0.950	0.997		0.950	0.983	
Satd. Flow (prot)	1736	3305	1413	0	3438	1538	1610	3380	0	1595	3294	0
Flt Permitted	0.330						0.950	0.997		0.950	0.983	
Satd. Flow (perm)	603	3305	1413	0	3438	1538	1610	3380	0	1595	3294	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)		5	97			38						1
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		298			291			298			403	
Travel Time (s)		6.8			6.6			6.8			9.2	
Peak Hour Factor	0.83	0.83	0.83	0.93	0.93	0.93	0.84	0.84	0.84	0.85	0.85	0.85
Growth Factor	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%
Heavy Vehicles (%)	4%	4%	4%	5%	5%	5%	2%	2%	2%	3%	3%	3%
Adj. Flow (vph)	25	722	293	0	638	522	309	562	1	529	420	7
Shared Lane Traffic (%)			10%				10%			41%		
Lane Group Flow (vph)	25	751	264	0	638	522	278	594	0	312	644	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1	1		1	1	1	1		1	1	
Detector Template												
Leading Detector (ft)	50	50	50		50	50	50	50		50	50	
Trailing Detector (ft)	0	0	0		0	0	0	0		0	0	
Detector 1 Position(ft)	0	0	0		0	0	0	0		0	0	
Detector 1 Size(ft)	50	50	50		50	50	50	50		50	50	
Detector 1 Type	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0		0.0	0.0	
Turn Type	Perm	NA	pm+ov		NA	pm+ov	Split	NA		Split	NA	
Protected Phases		1	3		1	2	3	3		2	2	
Permitted Phases	1		1			1						
Detector Phase	1	1	3		1	2	3	3		2	2	
Switch Phase												
Minimum Initial (s)	7.0	7.0	6.0		7.0	6.0	6.0	6.0		6.0	6.0	
Minimum Split (s)	30.0	30.0	15.0		30.0	15.0	15.0	15.0		15.0	15.0	



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (s)	46.0	46.0	25.0		46.0	29.0	25.0	25.0		29.0	29.0	
Total Split (%)	46.0%	46.0%	25.0%		46.0%	29.0%	25.0%	25.0%		29.0%	29.0%	
Maximum Green (s)	40.0	40.0	18.5		40.0	23.0	18.5	18.5		23.0	23.0	
Yellow Time (s)	3.5	3.5	3.5		3.5	3.5	3.5	3.5		3.5	3.5	
All-Red Time (s)	2.5	2.5	3.0		2.5	2.5	3.0	3.0		2.5	2.5	
Lost Time Adjust (s)	0.0	0.0	0.0		0.0	0.0	0.0	0.0		0.0	0.0	
Total Lost Time (s)	6.0	6.0	6.5		6.0	6.0	6.5	6.5		6.0	6.0	
Lead/Lag	Lead	Lead			Lead	Lag				Lag	Lag	
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0	3.0	3.0		3.0	3.0	3.0	3.0		3.0	3.0	
Recall Mode	C-Max	C-Max	None		C-Max	None	None	None		None	None	
Walk Time (s)	7.0	7.0			7.0							
Flash Dont Walk (s)	16.0	16.0			16.0							
Pedestrian Calls (#/hr)	0	0			0							
Act Effct Green (s)	40.0	40.0	64.5		40.0	69.0	18.5	18.5		23.0	23.0	
Actuated g/C Ratio	0.40	0.40	0.64		0.40	0.69	0.18	0.18		0.23	0.23	
v/c Ratio	0.10	0.57	0.28		0.46	0.49	0.94	0.95		0.85	0.85	
Control Delay	14.0	15.2	4.9		8.4	1.2	72.2	59.4		59.7	48.9	
Queue Delay	0.0	0.4	0.5		0.8	2.1	2.0	6.8		0.0	0.0	
Total Delay	14.0	15.7	5.3		9.2	3.3	74.3	66.2		59.7	48.9	
LOS	B	B	A		A	A	E	E		E	D	
Approach Delay		13.0			6.5			68.8			52.4	
Approach LOS		B			A			E			D	

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 51 (51%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 80

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.95

Intersection Signal Delay: 32.6


Intersection LOS: C

Intersection Capacity Utilization 65.1%

ICU Level of Service C

Analysis Period (min) 15

Splits and Phases: 3042: University/IL WB & Main

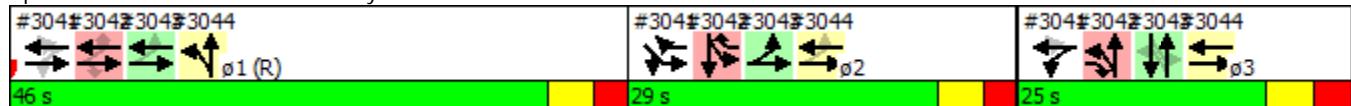

Lanes, Volumes, Timings  
3043: Union & Main

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	52	671	0	0	1034	24	4	88	105	29	0	88
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	125		0	0		0	0		0	0		0
Storage Lanes	1		0	0		0	1		0	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.91	1.00	1.00	0.91	0.91	1.00	0.95	0.95	1.00	1.00	1.00
Fr <sub>t</sub>					0.997			0.918			0.898	
Flt Protected	0.950						0.950				0.988	
Satd. Flow (prot)	1641	4715	0	0	4879	0	1597	2933	0	0	1492	0
Flt Permitted	0.118						0.625				0.855	
Satd. Flow (perm)	204	4715	0	0	4879	0	1051	2933	0	0	1291	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					4			130			113	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		291			715			361			297	
Travel Time (s)		6.6			16.3			8.2			6.8	
Peak Hour Factor	0.82	0.82	0.82	0.92	0.92	0.95	0.91	0.91	0.91	0.88	0.88	0.88
Growth Factor	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%
Heavy Vehicles (%)	10%	10%	10%	6%	6%	6%	13%	13%	13%	13%	13%	13%
Adj. Flow (vph)	72	925	0	0	1270	29	5	109	130	37	0	113
Shared Lane Traffic (%)												
Lane Group Flow (vph)	72	925	0	0	1299	0	5	239	0	0	150	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1			1		1	1		1	1	
Detector Template												
Leading Detector (ft)	50	50			50		50	50		50	50	
Trailing Detector (ft)	0	0			0		0	0		0	0	
Detector 1 Position(ft)	0	0			0		0	0		0	0	
Detector 1 Size(ft)	50	50			50		50	50		50	50	
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0			0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0			0.0		0.0	0.0		0.0	0.0	
Turn Type	pm+pt	NA			NA		Perm	NA		Perm	NA	
Protected Phases	2	1 2			1			3			3	
Permitted Phases	1 2						3			3		
Detector Phase	2	1 2			1		3	3		3	3	
Switch Phase												
Minimum Initial (s)	6.0				7.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	15.0				30.0		15.0	15.0		15.0	15.0	



Lane Group	EBL	EBT	EBR	WBL	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (s)	32.0			40.0		28.0	28.0		28.0	28.0	
Total Split (%)	32.0%				40.0%		28.0%	28.0%		28.0%	28.0%
Maximum Green (s)	26.0				34.0		21.5	21.5		21.5	21.5
Yellow Time (s)	3.5				3.5		3.5	3.5		3.5	3.5
All-Red Time (s)	2.5				2.5		3.0	3.0		3.0	3.0
Lost Time Adjust (s)	0.0				0.0		0.0	0.0		0.0	
Total Lost Time (s)	6.0				6.0		6.5	6.5		6.5	
Lead/Lag	Lag					Lead					
Lead-Lag Optimize?											
Vehicle Extension (s)	3.0				3.0		3.0	3.0		3.0	3.0
Recall Mode	None				C-Max		None	None		None	None
Walk Time (s)					7.0						
Flash Dont Walk (s)					16.0						
Pedestrian Calls (#/hr)					0						
Act Effct Green (s)	60.0	66.0			34.0		21.5	21.5		21.5	
Actuated g/C Ratio	0.60	0.66			0.34		0.22	0.22		0.22	
v/c Ratio	0.15	0.30			0.78		0.02	0.33		0.41	
Control Delay	5.9	3.2			28.9		43.6	31.0		14.3	
Queue Delay	0.0	0.2			0.0		0.0	0.0		0.0	
Total Delay	5.9	3.5			28.9		43.6	31.0		14.3	
LOS	A	A			C		D	C		B	
Approach Delay		3.6			28.9			31.2		14.3	
Approach LOS		A			C			C		B	

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 38 (38%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.81

Intersection Signal Delay: 19.0

Intersection LOS: B

Intersection Capacity Utilization 63.5%

ICU Level of Service B

Analysis Period (min) 15

Splits and Phases: 3043: Union & Main



Lanes, Volumes, Timings  
3043: Union & Main

1/7/2014



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑↑			↑↑↑	↑	↑	↑↑			↔	
Volume (vph)	52	881	0	0	902	62	5	100	195	28	0	48
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	125		0	0		0	0		0	0		0
Storage Lanes	1		0	0		0	1		0	0		0
Taper Length (ft)	25			25			25			25		
Lane Util. Factor	1.00	0.91	1.00	1.00	*0.60	0.91	1.00	0.95	0.95	1.00	1.00	1.00
Frt					0.990			0.901			0.915	
Flt Protected	0.950						0.950				0.982	
Satd. Flow (prot)	1752	5036	0	0	3256	0	1770	3189	0	0	1642	0
Flt Permitted	0.100						0.697				0.640	
Satd. Flow (perm)	184	5036	0	0	3256	0	1298	3189	0	0	1070	0
Right Turn on Red			Yes			Yes			Yes			Yes
Satd. Flow (RTOR)					8			125			98	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		291			715			361			297	
Travel Time (s)		6.6			16.3			8.2			6.8	
Peak Hour Factor	0.88	0.88	0.88	0.88	0.88	0.88	0.92	0.92	0.92	0.78	0.78	0.78
Growth Factor	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%	113%
Heavy Vehicles (%)	3%	3%	3%	4%	4%	4%	2%	2%	2%	4%	4%	4%
Adj. Flow (vph)	67	1131	0	0	1158	80	6	123	240	41	0	70
Shared Lane Traffic (%)												
Lane Group Flow (vph)	67	1131	0	0	1238	0	6	363	0	0	111	0
Enter Blocked Intersection	No	No	No	No	No	No	No	No	No	No	No	No
Lane Alignment	Left	Left	Right	Left	Left	Right	Left	Left	Right	Left	Left	Right
Median Width(ft)		12			12			12			12	
Link Offset(ft)		0			0			0			0	
Crosswalk Width(ft)		16			16			16			16	
Two way Left Turn Lane												
Headway Factor	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Turning Speed (mph)	15		9	15		9	15		9	15		9
Number of Detectors	1	1			1		1	1		1	1	
Detector Template												
Leading Detector (ft)	50	50			50		50	50		50	50	
Trailing Detector (ft)	0	0			0		0	0		0	0	
Detector 1 Position(ft)	0	0			0		0	0		0	0	
Detector 1 Size(ft)	50	50			50		50	50		50	50	
Detector 1 Type	Cl+Ex	Cl+Ex			Cl+Ex		Cl+Ex	Cl+Ex		Cl+Ex	Cl+Ex	
Detector 1 Channel												
Detector 1 Extend (s)	0.0	0.0			0.0		0.0	0.0		0.0	0.0	
Detector 1 Queue (s)	0.0	0.0			0.0		0.0	0.0		0.0	0.0	
Detector 1 Delay (s)	0.0	0.0			0.0		0.0	0.0		0.0	0.0	
Turn Type	pm+pt	NA			NA		Perm	NA		Perm	NA	
Protected Phases	2	1 2			1			3			3	
Permitted Phases	1 2						3			3		
Detector Phase	2	1 2			1		3	3		3	3	
Switch Phase												
Minimum Initial (s)		6.0				7.0		6.0	6.0		6.0	6.0
Minimum Split (s)		15.0				30.0		15.0	15.0		15.0	15.0



Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Total Split (s)	29.0				46.0		25.0	25.0		25.0	25.0	
Total Split (%)	29.0%				46.0%		25.0%	25.0%		25.0%	25.0%	
Maximum Green (s)	23.0				40.0		18.5	18.5		18.5	18.5	
Yellow Time (s)	3.5				3.5		3.5	3.5		3.5	3.5	
All-Red Time (s)	2.5				2.5		3.0	3.0		3.0	3.0	
Lost Time Adjust (s)	0.0				0.0		0.0	0.0		0.0		
Total Lost Time (s)	6.0				6.0		6.5	6.5		6.5		
Lead/Lag	Lag						Lead					
Lead-Lag Optimize?												
Vehicle Extension (s)	3.0					3.0		3.0	3.0		3.0	3.0
Recall Mode	None					C-Max		None	None		None	None
Walk Time (s)						7.0						
Flash Dont Walk (s)						16.0						
Pedestrian Calls (#/hr)						0						
Act Effct Green (s)	63.0	69.0			40.0		18.5	18.5		18.5		
Actuated g/C Ratio	0.63	0.69			0.40		0.18	0.18		0.18		
v/c Ratio	0.14	0.33			0.95		0.03	0.53		0.40		
Control Delay	5.1	2.5			36.4		50.5	39.7		14.2		
Queue Delay	0.0	0.2			0.0		0.0	0.0		0.0		
Total Delay	5.1	2.7			36.4		50.5	39.7		14.2		
LOS	A	A			D		D	D		B		
Approach Delay		2.8			36.4			39.9			14.2	
Approach LOS		A			D			D			B	

#### Intersection Summary

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 51 (51%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 80

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.95

Intersection Signal Delay: 22.2

Intersection LOS: C


Intersection Capacity Utilization 62.4%

ICU Level of Service B

Analysis Period (min) 15

\* User Entered Value

Splits and Phases: 3043: Union & Main

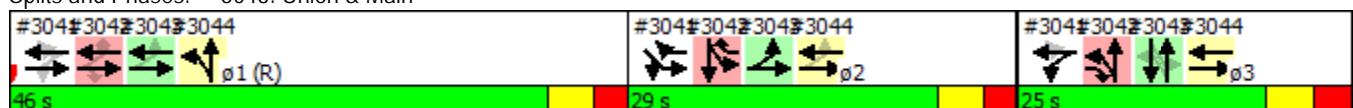

# **Appendix G – Traffic Analysis Contents**

## **2035 Preferred Alternative**

- Preferred Alternative Traffic Volumes**
- Preferred Alternative Level Of Service Summary**
- Preferred Alternative Capacity Analysis Printouts**
- Synchro Files (available upon request)**

## HCM Unsignalized Intersection Capacity Analysis

11: East Ave

1/7/2014

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑			↖						↗	
Volume (veh/h)	0	231	5	5	484	0	0	0	0	23	5	5
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	0	257	6	6	538	0	0	0	0	26	6	6
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s)												
Percent Blockage												
Right turn flare (veh)												
Median type		None			None							
Median storage veh)												
Upstream signal (ft)					148							
pX, platoon unblocked	0.71						0.71	0.71		0.71	0.71	0.71
vC, conflicting volume	538			262			817	808	259	808	811	538
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	154			262			544	532	259	532	536	154
tC, single (s)	4.1			4.1			7.1	6.5	6.2	7.1	6.5	6.2
tC, 2 stage (s)												
tF (s)	2.2			2.2			3.5	4.0	3.3	3.5	4.0	3.3
p0 queue free %	100			100			100	100	100	92	98	99
cM capacity (veh/h)	1011			1290			316	325	784	327	322	640
Direction, Lane #	EB 1	WB 1	SB 1									
Volume Total	262	543	37									
Volume Left	0	6	26									
Volume Right	6	0	6									
cSH	1700	1290	353									
Volume to Capacity	0.15	0.00	0.10									
Queue Length 95th (ft)	0	0	9									
Control Delay (s)	0.0	0.1	16.4									
Lane LOS		A	C									
Approach Delay (s)	0.0	0.1	16.4									
Approach LOS			C									
<b>Intersection Summary</b>												
Average Delay			0.8									
Intersection Capacity Utilization			39.5%		ICU Level of Service					A		
Analysis Period (min)			15									

## HCM Unsignalized Intersection Capacity Analysis

24: S Union St &amp; Inner Loop

1/7/2014

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (veh/h)	10	0	432	0	0	20	315	280	0	0	218	5
Sign Control		Stop			Stop			Free			Free	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	11	0	480	0	0	22	350	311	0	0	242	6
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s)												
Percent Blockage												
Right turn flare (veh)												
Median type								TWLTL		TWLTL		
Median storage veh)								2		2		
Upstream signal (ft)								974		318		
pX, platoon unblocked	0.93	0.93	0.89	0.93	0.93	0.93	0.89			0.93		
vC, conflicting volume	1278	1256	245	1736	1259	311	248			311		
vC1, stage 1 conf vol	245	245		1011	1011							
vC2, stage 2 conf vol	1033	1011		725	248							
vCu, unblocked vol	1080	1056	93	1573	1059	215	96			215		
tC, single (s)	7.1	6.5	6.2	7.1	6.5	6.2	4.1			4.1		
tC, 2 stage (s)	6.1	5.5		6.1	5.5							
tF (s)	3.5	4.0	3.3	3.5	4.0	3.3	2.2			2.2		
p0 queue free %	94	100	44	100	100	97	73			100		
cM capacity (veh/h)	190	219	860	29	216	768	1319			1243		
Direction, Lane #	EB 1	WB 1	NB 1	NB 2	SB 1							
Volume Total	491	22	350	311	248							
Volume Left	11	0	350	0	0							
Volume Right	480	22	0	0	6							
cSH	796	768	1319	1700	1700							
Volume to Capacity	0.62	0.03	0.27	0.18	0.15							
Queue Length 95th (ft)	108	2	27	0	0							
Control Delay (s)	16.5	9.8	8.7	0.0	0.0							
Lane LOS	C	A	A									
Approach Delay (s)	16.5	9.8	4.6		0.0							
Approach LOS	C	A										
<b>Intersection Summary</b>												
Average Delay			8.0									
Intersection Capacity Utilization			66.5%		ICU Level of Service					C		
Analysis Period (min)			15									

## HCM Unsignalized Intersection Capacity Analysis

36: Howell St

1/7/2014

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↔	↔		↑	↑	↔
Volume (veh/h)	0	360	0	0	363	0	0	0	0	0	0	0
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Hourly flow rate (vph)	0	379	0	0	382	0	0	0	0	0	0	0
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s)												
Percent Blockage												
Right turn flare (veh)												
Median type		TWLTL			TWLTL							
Median storage veh)		2			2							
Upstream signal (ft)		457			339							
pX, platoon unblocked				0.81			0.81	0.81	0.81	0.81	0.81	
vC, conflicting volume	382			379			761	761	379	761	761	382
vC1, stage 1 conf vol							379	379		382	382	
vC2, stage 2 conf vol							382	382		379	379	
vCu, unblocked vol	382			124			593	593	124	593	593	382
tC, single (s)	4.2			4.2			7.1	6.5	6.2	7.1	6.5	6.2
tC, 2 stage (s)							6.1	5.5		6.1	5.5	
tF (s)	2.3			2.3			3.5	4.0	3.3	3.5	4.0	3.3
p0 queue free %	100			100			100	100	100	100	100	100
cM capacity (veh/h)	1144			1162			549	520	755	549	520	665
Direction, Lane #	EB 1	EB 2	WB 1	WB 2	NB 1	SB 1						
Volume Total	0	379	0	382	0	0						
Volume Left	0	0	0	0	0	0						
Volume Right	0	0	0	0	0	0						
cSH	1700	1700	1700	1700	1700	1700						
Volume to Capacity	0.00	0.22	0.00	0.22	0.00	0.00						
Queue Length 95th (ft)	0	0	0	0	0	0						
Control Delay (s)	0.0	0.0	0.0	0.0	0.0	0.0						
Lane LOS					A	A						
Approach Delay (s)	0.0		0.0		0.0	0.0						
Approach LOS					A	A						
<b>Intersection Summary</b>												
Average Delay			0.0									
Intersection Capacity Utilization			22.4%			ICU Level of Service						
Analysis Period (min)			15									

Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	Y		P			H
Volume (veh/h)	6	6	806	20	9	423
Sign Control	Stop		Free			Free
Grade	0%		0%			0%
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	7	7	896	22	10	470
Pedestrians						
Lane Width (ft)						
Walking Speed (ft/s)						
Percent Blockage						
Right turn flare (veh)						
Median type			TWLTL			None
Median storage veh)			2			
Upstream signal (ft)			1017			240
pX, platoon unblocked	0.85	0.73			0.73	
vC, conflicting volume	1397	907			918	
vC1, stage 1 conf vol	907					
vC2, stage 2 conf vol	490					
vCu, unblocked vol	669	687			702	
tC, single (s)	6.4	6.2			4.1	
tC, 2 stage (s)	5.4					
tF (s)	3.5	3.3			2.2	
p0 queue free %	98	98			98	
cM capacity (veh/h)	353	324			647	
Direction, Lane #	WB 1	NB 1	SB 1			
Volume Total	13	918	480			
Volume Left	7	0	10			
Volume Right	7	22	0			
cSH	338	1700	647			
Volume to Capacity	0.04	0.54	0.02			
Queue Length 95th (ft)	3	0	1			
Control Delay (s)	16.1	0.0	0.4			
Lane LOS	C		A			
Approach Delay (s)	16.1	0.0	0.4			
Approach LOS	C					
<b>Intersection Summary</b>						
Average Delay			0.3			
Intersection Capacity Utilization			53.6%	ICU Level of Service		A
Analysis Period (min)			15			

## HCM Unsignalized Intersection Capacity Analysis

41: S Union St &amp; Charlotte St

1/7/2014

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔			↔		↑	↑↔		↑	↑↔	
Volume (veh/h)	15	20	10	5	43	15	26	575	13	15	630	5
Sign Control		Stop			Stop			Free			Free	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	17	22	11	6	48	17	29	639	14	17	700	6
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s)												
Percent Blockage												
Right turn flare (veh)												
Median type								TWLTL			TWLTL	
Median storage (veh)								2			2	
Upstream signal (ft)								655			637	
pX, platoon unblocked	0.91	0.91	0.90	0.91	0.91	0.86	0.90				0.86	
vC, conflicting volume	1154	1447	703	1459	1443	327	706				653	
vC1, stage 1 conf vol	736	736		704	704							
vC2, stage 2 conf vol	418	711		756	739							
vCu, unblocked vol	650	972	615	985	967	0	618				279	
tC, single (s)	7.5	6.5	6.9	7.5	6.5	6.9	4.2				4.2	
tC, 2 stage (s)	6.5	5.5		6.5	5.5							
tF (s)	3.5	4.0	3.3	3.5	4.0	3.3	2.2				2.2	
p0 queue free %	95	94	97	98	86	98	97				98	
cM capacity (veh/h)	363	362	391	286	348	935	845				1092	
Direction, Lane #	EB 1	WB 1	NB 1	NB 2	NB 3	SB 1	SB 2					
Volume Total	50	70	29	426	227	17	706					
Volume Left	17	6	29	0	0	17	0					
Volume Right	11	17	0	0	14	0	6					
cSH	368	401	845	1700	1700	1092	1700					
Volume to Capacity	0.14	0.17	0.03	0.25	0.13	0.02	0.42					
Queue Length 95th (ft)	12	16	3	0	0	1	0					
Control Delay (s)	16.3	15.9	9.4	0.0	0.0	8.3	0.0					
Lane LOS	C	C	A			A						
Approach Delay (s)	16.3	15.9	0.4			0.2						
Approach LOS	C	C										
Intersection Summary												
Average Delay				1.5								
Intersection Capacity Utilization				46.7%				ICU Level of Service			A	
Analysis Period (min)				15								

Movement	EBL	EBR	NBL	NBT	SBT	SBR
Lane Configurations	Y		Y	↑	↑	
Volume (veh/h)	0	0	0	826	429	0
Sign Control	Stop			Free	Free	
Grade	0%			0%	0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	0	0	0	918	477	0
Pedestrians						
Lane Width (ft)						
Walking Speed (ft/s)						
Percent Blockage						
Right turn flare (veh)						
Median type				TWLTL	TWLTL	
Median storage veh)				2	2	
Upstream signal (ft)				792	465	
pX, platoon unblocked	0.85	0.75	0.75			
vC, conflicting volume	1394	477	477			
vC1, stage 1 conf vol	477					
vC2, stage 2 conf vol	918					
vCu, unblocked vol	729	144	144			
tC, single (s)	6.4	6.2	4.1			
tC, 2 stage (s)	5.4					
tF (s)	3.5	3.3	2.2			
p0 queue free %	100	100	100			
cM capacity (veh/h)	347	678	1076			
Direction, Lane #	EB 1	NB 1	NB 2	SB 1		
Volume Total	0	0	918	477		
Volume Left	0	0	0	0		
Volume Right	0	0	0	0		
cSH	1700	1700	1700	1700		
Volume to Capacity	0.00	0.00	0.54	0.28		
Queue Length 95th (ft)	0	0	0	0		
Control Delay (s)	0.0	0.0	0.0	0.0		
Lane LOS	A					
Approach Delay (s)	0.0	0.0		0.0		
Approach LOS	A					
<b>Intersection Summary</b>						
Average Delay			0.0			
Intersection Capacity Utilization			46.8%	ICU Level of Service		A
Analysis Period (min)			15			

## HCM Unsignalized Intersection Capacity Analysis

49: Pitkin St &amp; Charlotte St

1/7/2014

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑			↖						↗	
Volume (veh/h)	0	35	5	2	70	0	0	0	0	10	33	5
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	0	39	6	2	78	0	0	0	0	11	37	6
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s)												
Percent Blockage												
Right turn flare (veh)												
Median type		None			None							
Median storage veh)												
Upstream signal (ft)												
pX, platoon unblocked												
vC, conflicting volume	78			44			148	124	42	124	127	78
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	78			44			148	124	42	124	127	78
tC, single (s)	4.1			4.1			7.1	6.5	6.2	7.1	6.5	6.2
tC, 2 stage (s)												
tF (s)	2.2			2.2			3.5	4.0	3.3	3.5	4.0	3.3
p0 queue free %	100			100			100	100	100	99	95	99
cM capacity (veh/h)	1521			1564			790	769	1035	852	765	986
Direction, Lane #	EB 1	WB 1	SB 1									
Volume Total	44	80	53									
Volume Left	0	2	11									
Volume Right	6	0	6									
cSH	1700	1564	800									
Volume to Capacity	0.03	0.00	0.07									
Queue Length 95th (ft)	0	0	5									
Control Delay (s)	0.0	0.2	9.8									
Lane LOS		A	A									
Approach Delay (s)	0.0	0.2	9.8									
Approach LOS			A									
<b>Intersection Summary</b>												
Average Delay			3.0									
Intersection Capacity Utilization			15.3%		ICU Level of Service					A		
Analysis Period (min)			15									



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↑↑	↑		✗	
Volume (veh/h)	0	107	377	0	10	5
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	0	119	419	0	11	6
Pedestrians						
Lane Width (ft)						
Walking Speed (ft/s)						
Percent Blockage						
Right turn flare (veh)						
Median type		None	None			
Median storage veh)						
Upstream signal (ft)			134			
pX, platoon unblocked						
vC, conflicting volume	419			478	419	
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	419			478	419	
tC, single (s)	4.2			6.8	6.9	
tC, 2 stage (s)						
tF (s)	2.2			3.5	3.3	
p0 queue free %	100			98	99	
cM capacity (veh/h)	1123			519	586	
Direction, Lane #	EB 1	EB 2	WB 1	SB 1		
Volume Total	59	59	419	17		
Volume Left	0	0	0	11		
Volume Right	0	0	0	6		
cSH	1700	1700	1700	539		
Volume to Capacity	0.03	0.03	0.25	0.03		
Queue Length 95th (ft)	0	0	0	2		
Control Delay (s)	0.0	0.0	0.0	11.9		
Lane LOS				B		
Approach Delay (s)	0.0		0.0	11.9		
Approach LOS				B		
<b>Intersection Summary</b>						
Average Delay			0.4			
Intersection Capacity Utilization			29.8%	ICU Level of Service		A
Analysis Period (min)			15			

## Timings

2: Monroe Ave/Chestnut Street &amp; Inner Loop/Howell St

1/7/2014

	↑	→	↓	↗	↖	↙	↖	↗	↑	↗	↖	↓	↗
Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR	↑
Lane Configurations	↑	↑		↑	↑↑		↑	↑		↑	↑	↑	↑
Volume (vph)	229	303	167	23	274	66	168	435	1	56	258	293	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	
Storage Length (ft)	200			100		250	250		0	100		0	
Storage Lanes	1			1		1	1		0	1		1	
Taper Length (ft)	75			75		75			75				
Right Turn on Red				Yes			No			Yes			Yes
Link Speed (mph)		30			30			30			30		
Link Distance (ft)		973			457			741			768		
Travel Time (s)		22.1			10.4			16.8			17.5		
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	
Heavy Vehicles (%)	8%	8%	8%	8%	8%	8%	2%	2%	2%	2%	2%	2%	
Shared Lane Traffic (%)													
Lane Group Flow (vph)	241	495	0	24	357	0	177	459	0	59	272	308	
Turn Type	pm+pt	NA		pm+pt	NA		pm+pt	NA		Perm	NA	Free	
Protected Phases	7	4		3	8		5	2			6		
Permitted Phases	4			8			2			6		Free	
Detector Phase	7	4		3	8		5	2		6	6		
Switch Phase													
Minimum Initial (s)	7.0	10.0		7.0	10.0		7.0	10.0		10.0	10.0		
Minimum Split (s)	14.0	38.5		14.0	33.5		13.5	23.5		23.5	23.5		
Total Split (s)	18.0	42.0		14.0	38.0		14.0	38.0		24.0	24.0		
Total Split (%)	18.0%	42.0%		14.0%	38.0%		14.0%	38.0%		24.0%	24.0%		
Yellow Time (s)	3.5	3.5		3.5	3.5		3.5	3.5		3.5	3.5		
All-Red Time (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0		
Lost Time Adjust (s)	-1.5	-1.5		-1.5	-1.5		-1.5	-1.5		-1.5	-1.5		
Total Lost Time (s)	5.0	5.0		5.0	5.0		5.0	5.0		5.0	5.0		
Lead/Lag	Lead	Lag		Lead	Lag		Lead			Lag	Lag		
Lead-Lag Optimize?	Yes			Yes			Yes			Yes	Yes		
Recall Mode	None	Min		None	Min		None	C-Max		C-Max	C-Max		
Act Effct Green (s)	40.4	35.2		31.2	22.6		43.4	43.4		28.1	28.1	100.0	
Actuated g/C Ratio	0.40	0.35		0.31	0.23		0.43	0.43		0.28	0.28	1.00	
v/c Ratio	0.59	0.82		0.09	0.49		0.47	0.57		0.23	0.52	0.19	
Control Delay	25.7	39.5		6.8	13.9		19.6	21.1		35.2	37.6	0.3	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	0.0	
Total Delay	25.7	39.5		6.8	13.9		19.6	21.1		35.2	37.6	0.3	
LOS	C	D		A	B		B	C		D	D	A	
Approach Delay		35.0			13.5			20.7			19.4		
Approach LOS		C			B			C			B		
Queue Length 50th (ft)	114	264		3	65		40	106		28	141	0	
Queue Length 95th (ft)	135	#397		m3	54		93	321		73	#287	0	
Internal Link Dist (ft)		893			377			661			688		
Turn Bay Length (ft)	200			100			250			100			
Base Capacity (vph)	406	638		263	1071		377	807		256	522	1583	
Starvation Cap Reductn	0	0		0	0		0	0		0	0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	0	
Reduced v/c Ratio	0.59	0.78		0.09	0.33		0.47	0.57		0.23	0.52	0.19	

## Intersection Summary

Lane Group	ø9
Lane Configurations	
Volume (vph)	
Ideal Flow (vphpl)	
Storage Length (ft)	
Storage Lanes	
Taper Length (ft)	
Right Turn on Red	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Heavy Vehicles (%)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Turn Type	
Protected Phases	9
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	4.0
Minimum Split (s)	6.0
Total Split (s)	6.0
Total Split (%)	6%
Yellow Time (s)	2.0
All-Red Time (s)	0.0
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Recall Mode	Max
Act Effct Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	
Queue Length 95th (ft)	
Internal Link Dist (ft)	
Turn Bay Length (ft)	
Base Capacity (vph)	
Starvation Cap Reductn	
Spillback Cap Reductn	
Storage Cap Reductn	
Reduced v/c Ratio	
<b>Intersection Summary</b>	

## Timings

2: Monroe Ave/Chestnut Street & Inner Loop/Howell St

1/7/2014

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 12 (12%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 100

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.82

Intersection Signal Delay: 23.6

Intersection LOS: C

Intersection Capacity Utilization 79.9%

ICU Level of Service D


Analysis Period (min) 15

# 95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 2: Monroe Ave/Chestnut Street & Inner Loop/Howell St

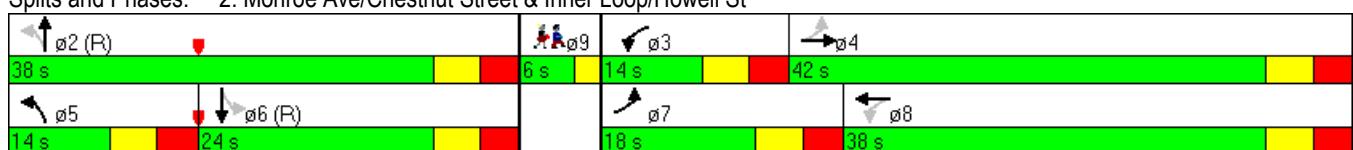

## Timings

3: S Union St &amp; Howell St

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔			↔			↔			↔	
Volume (vph)	331	5	6	5	5	5	6	490	5	5	93	342
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		0	0		0	150		0
Storage Lanes	0		0	0		0	0		0	0		0
Taper Length (ft)	25			25			25			75		
Right Turn on Red			Yes			Yes			Yes			Yes
Link Speed (mph)		30			25			30			30	
Link Distance (ft)		339			304			503			434	
Travel Time (s)		7.7			8.3			11.4			9.9	
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Heavy Vehicles (%)	8%	8%	8%	0%	0%	0%	5%	5%	5%	3%	3%	8%
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	359	0	0	15	0	0	527	0	0	463	0
Turn Type	Perm	NA										
Protected Phases		4			8			2			6	
Permitted Phases	4			8			2			6	6	
Detector Phase	4	4		8	8		2	2		6	6	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	19.5	19.5		19.5	19.5		22.5	22.5		22.5	22.5	
Total Split (s)	47.0	47.0		47.0	47.0		47.0	47.0		47.0	47.0	
Total Split (%)	47.0%	47.0%		47.0%	47.0%		47.0%	47.0%		47.0%	47.0%	
Yellow Time (s)	3.5	3.5		3.5	3.5		3.5	3.5		3.5	3.5	
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		-1.5			-1.5			-1.5			-1.5	
Total Lost Time (s)		4.0			4.0			4.0			4.0	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		Min	Min		Min	Min	
Act Effct Green (s)	50.1			50.1			35.9			35.9		
Actuated g/C Ratio	0.50			0.50			0.36			0.36		
v/c Ratio	0.56			0.02			0.82			0.65		
Control Delay	15.6			12.5			23.6			7.4		
Queue Delay	0.0			0.0			0.0			0.0		
Total Delay	15.6			12.5			23.6			7.4		
LOS	B			B			C			A		
Approach Delay	15.6			12.5			23.6			7.4		
Approach LOS	B			B			C			A		
Queue Length 50th (ft)	209			3			122			75		
Queue Length 95th (ft)	m323			16			169			m143		
Internal Link Dist (ft)	259			224			423			354		
Turn Bay Length (ft)												
Base Capacity (vph)	636			838			774			806		
Starvation Cap Reductn	0			0			2			0		
Spillback Cap Reductn	0			0			0			0		
Storage Cap Reductn	0			0			0			0		
Reduced v/c Ratio	0.56			0.02			0.68			0.57		

## Intersection Summary

Lane Group	ø9
Lane Configurations	
Volume (vph)	
Ideal Flow (vphpl)	
Storage Length (ft)	
Storage Lanes	
Taper Length (ft)	
Right Turn on Red	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Heavy Vehicles (%)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Turn Type	
Protected Phases	9
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	4.0
Minimum Split (s)	6.0
Total Split (s)	6.0
Total Split (%)	6%
Yellow Time (s)	2.0
All-Red Time (s)	0.0
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Recall Mode	Max
Act Effct Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	
Queue Length 95th (ft)	
Internal Link Dist (ft)	
Turn Bay Length (ft)	
Base Capacity (vph)	
Starvation Cap Reductn	
Spillback Cap Reductn	
Storage Cap Reductn	
Reduced v/c Ratio	
<b>Intersection Summary</b>	

## Timings

3: S Union St &amp; Howell St

1/7/2014

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 81 (81%), Referenced to phase 4:EBTL and 8:WBTL, Start of Green

Natural Cycle: 60

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.82

Intersection Signal Delay: 15.9

Intersection LOS: B


Intersection Capacity Utilization 62.0%

ICU Level of Service B

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 3: S Union St &amp; Howell St

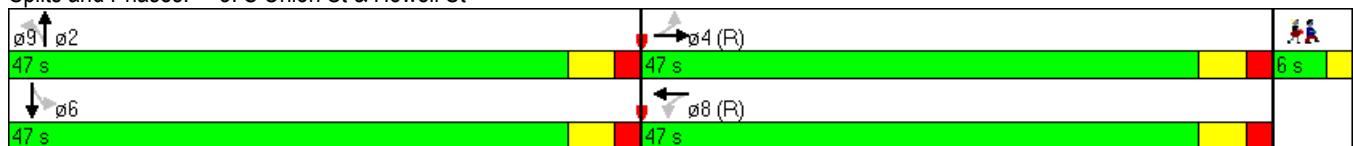

## Timings

5: S Union St &amp; Monroe Ave

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑			↑		↑	↑	↑		↔	
Volume (vph)	6	455	0	0	515	153	89	342	26	93	0	6
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	10	12	12	12	12	10	12	13	12	12	12
Storage Length (ft)	100		100	0		100	80		0	0		0
Storage Lanes	1		0	0		0	1		1	0		0
Taper Length (ft)	75			25			75			25		
Right Turn on Red			Yes			Yes			Yes			Yes
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		741			446			805			503	
Travel Time (s)		16.8			10.1			18.3			11.4	
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Heavy Vehicles (%)	2%	2%	2%	4%	4%	4%	5%	5%	5%	3%	3%	3%
Shared Lane Traffic (%)												
Lane Group Flow (vph)	6	479	0	0	703	0	94	360	27	0	104	0
Turn Type	Perm	NA			NA		Perm	NA	Perm	Perm	NA	
Protected Phases		2			6			8			4	
Permitted Phases	2						8		8	4		
Detector Phase	2	2			6		8	8	8	4	4	
Switch Phase												
Minimum Initial (s)	9.0	9.0			9.0		7.0	7.0	7.0	7.0	7.0	
Minimum Split (s)	24.0	24.0			24.0		22.0	22.0	22.0	22.0	22.0	
Total Split (s)	58.0	58.0			58.0		42.0	42.0	42.0	42.0	42.0	
Total Split (%)	58.0%	58.0%			58.0%		42.0%	42.0%	42.0%	42.0%	42.0%	
Yellow Time (s)	4.0	4.0			4.0		4.0	4.0	4.0	4.0	4.0	
All-Red Time (s)	2.0	2.0			2.0		2.0	2.0	2.0	2.0	2.0	
Lost Time Adjust (s)	-1.5	-1.5			-1.5		-1.5	-1.5	-1.5		-1.5	
Total Lost Time (s)	4.5	4.5			4.5		4.5	4.5	4.5		4.5	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max			C-Max		Min	Min	Min	Min	Min	
Act Effct Green (s)	64.1	64.1			64.1		26.9	26.9	26.9		26.9	
Actuated g/C Ratio	0.64	0.64			0.64		0.27	0.27	0.27		0.27	
v/c Ratio	0.02	0.43			0.62		0.29	0.74	0.06		0.66	
Control Delay	14.0	13.9			14.5		29.4	42.2	6.8		27.5	
Queue Delay	0.0	0.0			0.0		0.0	0.0	0.0		0.0	
Total Delay	14.0	13.9			14.5		29.4	42.2	6.8		27.5	
LOS	B	B			B		C	D	A		C	
Approach Delay		13.9			14.5			37.7			27.5	
Approach LOS		B			B			D			C	
Queue Length 50th (ft)	1	85			233		47	209	0		13	
Queue Length 95th (ft)	m3	m310			439		81	276	16		m27	
Internal Link Dist (ft)		661			366			725			423	
Turn Bay Length (ft)	100					80						
Base Capacity (vph)	337	1114			1142		457	678	616		207	
Starvation Cap Reductn	0	0			0		0	0	0		0	
Spillback Cap Reductn	0	0			0		0	0	0		0	
Storage Cap Reductn	0	0			0		0	0	0		0	
Reduced v/c Ratio	0.02	0.43			0.62		0.21	0.53	0.04		0.50	

**Intersection Summary**

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 81 (81%), Referenced to phase 2:EBTL and 6:WBT, Start of Green

Natural Cycle: 55

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.74

Intersection Signal Delay: 21.4


Intersection LOS: C

Intersection Capacity Utilization 71.5%

ICU Level of Service C

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

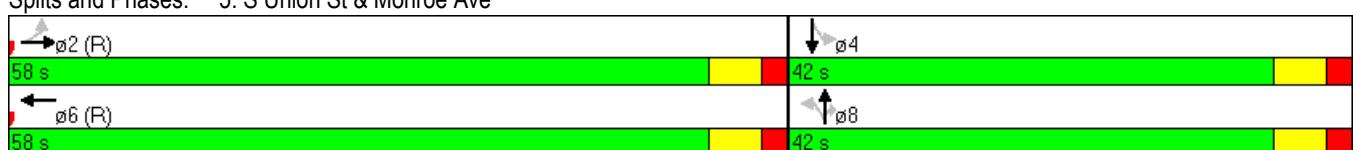**Splits and Phases:** 5: S Union St & Monroe Ave

## Timings

12: S Union St &amp; Main St

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑↑		↑	↑↑↑		↑	↑	↑	↑	↑	
Volume (vph)	60	775	0	198	1011	28	5	106	125	34	0	102
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	10	10	13	10	10	10	12	12	12	12	12	12
Storage Length (ft)	100		0	100		0	0		0	0		0
Storage Lanes	1		0	1		0	0		1	0		0
Taper Length (ft)	40			75			25			25		
Right Turn on Red			Yes			Yes			Yes			Yes
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		279			1119			376			743	
Travel Time (s)		6.3			25.4			8.5			16.9	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	10%	10%	10%	10%	10%	10%	2%	2%	2%	2%	2%	2%
Shared Lane Traffic (%)												
Lane Group Flow (vph)	67	861	0	220	1154	0	0	124	139	0	151	0
Turn Type	pm+pt	NA		pm+pt	NA		Perm	NA	Perm	Perm	NA	
Protected Phases	2	1		2	1			3			3	
Permitted Phases	1			1			3		3	3		
Detector Phase	2	1		2	1		3	3	3	3	3	
Switch Phase												
Minimum Initial (s)	6.0	7.0		6.0	7.0		6.0	6.0	6.0	6.0	6.0	
Minimum Split (s)	15.0	31.0		15.0	31.0		15.0	15.0	15.0	15.0	15.0	
Total Split (s)	37.0	39.0		37.0	39.0		24.0	24.0	24.0	24.0	24.0	
Total Split (%)	37.0%	39.0%		37.0%	39.0%		24.0%	24.0%	24.0%	24.0%	24.0%	
Yellow Time (s)	3.5	3.5		3.5	3.5		3.5	3.5	3.5	3.5	3.5	
All-Red Time (s)	2.5	2.5		2.5	2.5		2.5	2.5	2.5	2.5	2.5	
Lost Time Adjust (s)	-1.5	-1.5		-1.5	-1.5		-1.5	-1.5	-1.5	-1.5	-1.5	
Total Lost Time (s)	4.5	4.5		4.5	4.5		4.5	4.5	4.5	4.5	4.5	
Lead/Lag	Lag	Lead		Lag	Lead							
Lead-Lag Optimize?	Yes	Yes		Yes	Yes							
Recall Mode	None	C-Max		None	C-Max		Max	Max	Max	Max	Max	
Act Effct Green (s)	64.5	34.5		64.5	34.5			22.0	22.0			22.0
Actuated g/C Ratio	0.64	0.34		0.64	0.34			0.22	0.22			0.22
v/c Ratio	0.13	0.57		0.37	0.76			0.31	0.30			0.36
Control Delay	2.3	32.5		14.2	33.0			40.5	22.7			13.9
Queue Delay	0.0	1.3		0.0	0.0			0.0	0.0			0.0
Total Delay	2.3	33.8		14.2	33.0			40.5	22.7			13.9
LOS	A	C		B	C			D	C			B
Approach Delay		31.6			30.0			31.1			13.9	
Approach LOS		C			C			C			B	
Queue Length 50th (ft)	2	134		40	236			81	45		20	
Queue Length 95th (ft)	m6	184		65	291			140	98		76	
Internal Link Dist (ft)		199			1039			296			663	
Turn Bay Length (ft)	100		100									
Base Capacity (vph)	568	1518		625	1514			404	456		418	
Starvation Cap Reductn	0	421		0	0			0	0		0	
Spillback Cap Reductn	0	0		0	0			0	0		0	
Storage Cap Reductn	0	0		0	0			0	0		0	
Reduced v/c Ratio	0.12	0.78		0.35	0.76			0.31	0.30		0.36	

**Intersection Summary**

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 32 (32%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 65

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.79

Intersection Signal Delay: 29.7

Intersection LOS: C

Intersection Capacity Utilization 52.0%

ICU Level of Service A

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

**Splits and Phases:** 12: S Union St & Main St

## Timings

20: University Ave/Inner Loop Ramps &amp; Main St

1/7/2014

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑		↑↑↑		↑	↑↑		↑	↑↑	
Volume (vph)	10	339	137	0	602	516	208	344	3	493	396	12
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	10	10	10	10	10	10	11	12	12	10	10	10
Storage Length (ft)	95		0	0		0	0		0	225		225
Storage Lanes	1		1	0		0	1		0	1		1
Taper Length (ft)	35			25			25			40		
Right Turn on Red			Yes			Yes			Yes			Yes
Link Speed (mph)		30			30			30			40	
Link Distance (ft)		323			279			291			431	
Travel Time (s)		7.3			6.3			6.6			7.3	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	10%	10%	10%	10%	10%	10%	2%	2%	2%	2%	2%	2%
Shared Lane Traffic (%)		10%					14%			40%		
Lane Group Flow (vph)	11	392	137	0	1242	0	199	417	0	329	672	0
Turn Type	Perm	NA	Perm		NA		Split	NA		Split	NA	
Protected Phases		1			1		3	3		2	2	
Permitted Phases	1		1									
Detector Phase	1	1	1		1		3	3		2	2	
Switch Phase												
Minimum Initial (s)	7.0	7.0	7.0		7.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	31.0	31.0	31.0		31.0		15.0	15.0		15.0	15.0	
Total Split (s)	39.0	39.0	39.0		39.0		24.0	24.0		37.0	37.0	
Total Split (%)	39.0%	39.0%	39.0%		39.0%		24.0%	24.0%		37.0%	37.0%	
Yellow Time (s)	3.5	3.5	3.5		3.5		3.5	3.5		3.5	3.5	
All-Red Time (s)	2.5	2.5	2.5		2.5		2.5	2.5		2.5	2.5	
Lost Time Adjust (s)	-1.5	-1.5	-1.5		-1.5		-1.5	-1.5		-1.5	-1.5	
Total Lost Time (s)	4.5	4.5	4.5		4.5		4.5	4.5		4.5	4.5	
Lead/Lag	Lead	Lead	Lead		Lead					Lag	Lag	
Lead-Lag Optimize?	Yes	Yes	Yes		Yes					Yes	Yes	
Recall Mode	C-Max	C-Max	C-Max		C-Max		Max	Max		None	None	
Act Effct Green (s)	34.5	34.5	34.5		34.5		22.0	22.0		30.0	30.0	
Actuated g/C Ratio	0.34	0.34	0.34		0.34		0.22	0.22		0.30	0.30	
v/c Ratio	0.17	0.39	0.26		0.90dr		0.58	0.56		0.73	0.72	
Control Delay	29.3	24.4	8.3		6.7		35.4	31.0		41.4	35.8	
Queue Delay	0.0	0.1	0.0		0.4		0.2	0.3		0.0	0.4	
Total Delay	29.3	24.4	8.3		7.1		35.6	31.3		41.4	36.2	
LOS	C	C	A		A		D	C		D	D	
Approach Delay		20.5			7.1			32.7			37.9	
Approach LOS		C			A			C			D	
Queue Length 50th (ft)	4	67	0		12		131	137		197	200	
Queue Length 95th (ft)	m12	90	23		28		216	191		307	267	
Internal Link Dist (ft)		243			199			211			351	
Turn Bay Length (ft)	95										225	
Base Capacity (vph)	64	1008	519		1568		342	742		488	1010	
Starvation Cap Reductn	0	0	0		68		9	52		0	0	
Spillback Cap Reductn	0	68	2		0		0	0		0	74	
Storage Cap Reductn	0	0	0		0		0	0		0	0	
Reduced v/c Ratio	0.17	0.42	0.26		0.83		0.60	0.60		0.67	0.72	

**Intersection Summary**

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 32 (32%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 65

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.79

Intersection Signal Delay: 22.9

Intersection LOS: C

Intersection Capacity Utilization 62.0%

ICU Level of Service B

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

dr Defacto Right Lane. Recode with 1 though lane as a right lane.

**Splits and Phases:** 20: University Ave/Inner Loop Ramps & Main St

## Timings

21: S Union St &amp; University Ave

1/7/2014

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↑↑	↑↑			↑	
Volume (vph)	10	523	0	25	502	43	53	183	70	0	198	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	100		0	0		0	0		0
Storage Lanes	1		0	1		0	0		0	0		0
Taper Length (ft)	25			75			75			25		
Right Turn on Red			Yes			Yes			Yes			Yes
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		291			310			318			376	
Travel Time (s)		6.6			7.0			7.2			8.5	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Shared Lane Traffic (%)												
Lane Group Flow (vph)	11	581	0	28	606	0	0	340	0	0	220	0
Turn Type	Perm	NA		Perm	NA		Perm	NA			NA	
Protected Phases		4			8			2			6	
Permitted Phases	4			8			2				6	
Detector Phase	4	4		8	8		2	2				
Switch Phase												
Minimum Initial (s)	6.0	6.0		4.0	4.0		6.0	6.0			4.0	
Minimum Split (s)	31.0	31.0		31.0	31.0		31.0	31.0			31.0	
Total Split (s)	61.0	61.0		61.0	61.0		33.0	33.0			33.0	
Total Split (%)	61.0%	61.0%		61.0%	61.0%		33.0%	33.0%			33.0%	
Yellow Time (s)	4.0	4.0		4.0	4.0		4.0	4.0			4.0	
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0			2.0	
Lost Time Adjust (s)	-1.5	-1.5		-1.5	-1.5			-1.5			-1.5	
Total Lost Time (s)	4.5	4.5		4.5	4.5			4.5			4.5	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None			None	
Act Effect Green (s)	66.4	66.4		66.4	66.4			18.6			18.6	
Actuated g/C Ratio	0.66	0.66		0.66	0.66			0.19			0.19	
v/c Ratio	0.03	0.47		0.06	0.50			0.71			0.64	
Control Delay	4.2	8.6		7.7	10.8			29.4			46.4	
Queue Delay	0.0	3.1		0.0	0.0			0.0			0.0	
Total Delay	4.2	11.7		7.7	10.8			29.4			46.4	
LOS	A	B		A	B			C			D	
Approach Delay		11.5			10.7			29.4			46.4	
Approach LOS		B			B			C			D	
Queue Length 50th (ft)	1	60		6	171			103			112	
Queue Length 95th (ft)	m2	482		19	302			m151			190	
Internal Link Dist (ft)		211			230			238			296	
Turn Bay Length (ft)				100								
Base Capacity (vph)	436	1237		454	1224			711			530	
Starvation Cap Reductn	0	534		0	0			0			0	
Spillback Cap Reductn	0	0		0	12			0			0	
Storage Cap Reductn	0	0		0	0			0			0	
Reduced v/c Ratio	0.03	0.83		0.06	0.50			0.48			0.42	
Intersection Summary												
Area Type:	Other											

Lane Group	ø9
Lane Configurations	
Volume (vph)	
Ideal Flow (vphpl)	
Storage Length (ft)	
Storage Lanes	
Taper Length (ft)	
Right Turn on Red	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Turn Type	
Protected Phases	9
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	4.0
Minimum Split (s)	6.0
Total Split (s)	6.0
Total Split (%)	6%
Yellow Time (s)	2.0
All-Red Time (s)	0.0
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Recall Mode	Max
Act Effect Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	
Queue Length 95th (ft)	
Internal Link Dist (ft)	
Turn Bay Length (ft)	
Base Capacity (vph)	
Starvation Cap Reductn	
Spillback Cap Reductn	
Storage Cap Reductn	
Reduced v/c Ratio	
Intersection Summary	

## Timings

21: S Union St & University Ave

1/7/2014

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 84 (84%), Referenced to phase 4:EBTL and 8:WBTL, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.71

Intersection Signal Delay: 18.9

Intersection LOS: B

Intersection Capacity Utilization 59.5%

ICU Level of Service B

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 21: S Union St & University Ave



Lane Group	EBL	EBR	NBL	NBT	SBT	SBR	ø9
Lane Configurations							
Volume (vph)	81	36	168	653	396	209	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Storage Length (ft)	0	0	100			0	
Storage Lanes	1	1	1			0	
Taper Length (ft)	25		75				
Right Turn on Red		No			No		
Link Speed (mph)	30			30	30		
Link Distance (ft)	134			240	437		
Travel Time (s)	3.0			5.5	9.9		
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	90	40	187	726	672	0	
Turn Type	NA	Perm	pm+pt	NA	NA		
Protected Phases	4		5	2	6	9	
Permitted Phases		4	2				
Detector Phase	4	4	5	2	6		
Switch Phase							
Minimum Initial (s)	10.0	10.0	8.0	20.0	20.0	4.0	
Minimum Split (s)	24.5	24.5	13.5	25.5	25.5	6.0	
Total Split (s)	25.0	25.0	15.0	69.0	54.0	6.0	
Total Split (%)	25.0%	25.0%	15.0%	69.0%	54.0%	6%	
Yellow Time (s)	3.5	3.5	3.5	3.5	3.5	2.0	
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	0.0	
Lost Time Adjust (s)	-1.5	-1.5	-1.5	-1.5	-1.5		
Total Lost Time (s)	4.0	4.0	4.0	4.0	4.0		
Lead/Lag		Lead		Lag			
Lead-Lag Optimize?		Yes		Yes			
Recall Mode	None	None	None	C-Max	C-Max	Max	
Act Effct Green (s)	13.0	13.0	65.0	65.0	50.5		
Actuated g/C Ratio	0.13	0.13	0.65	0.65	0.50		
v/c Ratio	0.40	0.20	0.52	0.61	0.77		
Control Delay	45.0	40.6	8.4	9.0	17.4		
Queue Delay	0.0	0.0	0.0	0.0	0.3		
Total Delay	45.0	40.6	8.4	9.0	17.7		
LOS	D	D	A	A	B		
Approach Delay	43.7			8.9	17.7		
Approach LOS	D			A	B		
Queue Length 50th (ft)	54	23	34	222	151		
Queue Length 95th (ft)	99	53	m53	381	188		
Internal Link Dist (ft)	54			160	357		
Turn Bay Length (ft)			100				
Base Capacity (vph)	364	326	366	1187	878		
Starvation Cap Reductn	0	0	0	0	22		
Spillback Cap Reductn	0	0	0	0	0		
Storage Cap Reductn	0	0	0	0	0		
Reduced v/c Ratio	0.25	0.12	0.51	0.61	0.79		

**Intersection Summary**

## Timings

23: S Union St &amp; E Broad St

1/7/2014

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 91 (91%), Referenced to phase 2:NBT and 6:SBT, Start of Green

Natural Cycle: 80

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.77

Intersection Signal Delay: 15.0

Intersection LOS: B

Intersection Capacity Utilization 61.2%

ICU Level of Service B

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 23: S Union St &amp; E Broad St



## Timings

26: Pitkin St/University Ave &amp; Main St

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑		↑	↑↑	↑			↑↑	↑↑	↑	
Volume (vph)	5	287	6	10	550	262	0	0	0	198	27	1
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	10	11	13	10	11	11	12	12	12	12	12	12
Storage Length (ft)	50		0	100		0	0		0	180		0
Storage Lanes	1		0	1		1	0		0	1		0
Taper Length (ft)	25			35			25			75		
Right Turn on Red			Yes			Yes			Yes			Yes
Link Speed (mph)		30			30			25			30	
Link Distance (ft)		798			323			684			1114	
Travel Time (s)		18.1			7.3			18.7			25.3	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	10%	10%	10%	10%	10%	10%	2%	2%	2%	2%	2%	2%
Shared Lane Traffic (%)												
Lane Group Flow (vph)	6	326	0	11	611	291	0	0	0	220	31	0
Turn Type	Perm	NA		Perm	NA	Perm				Split	NA	
Protected Phases		1			1 3					2	2	
Permitted Phases	1			1 3		1 3						
Detector Phase	1	1		1 3	1 3	1 3				2	2	
Switch Phase												
Minimum Initial (s)	7.0	7.0								6.0	6.0	
Minimum Split (s)	31.0	31.0								15.0	15.0	
Total Split (s)	39.0	39.0								37.0	37.0	
Total Split (%)	39.0%	39.0%								37.0%	37.0%	
Yellow Time (s)	3.5	3.5								3.5	3.5	
All-Red Time (s)	2.5	2.5								2.5	2.5	
Lost Time Adjust (s)	-1.5	-1.5								-1.5	-1.5	
Total Lost Time (s)	4.5	4.5								4.5	4.5	
Lead/Lag	Lead	Lead								Lag	Lag	
Lead-Lag Optimize?	Yes	Yes								Yes	Yes	
Recall Mode	C-Max	C-Max								None	None	
Act Effct Green (s)	34.5	34.5		61.0	61.0	61.0				30.0	30.0	
Actuated g/C Ratio	0.34	0.34		0.61	0.61	0.61				0.30	0.30	
v/c Ratio	0.09	0.30		0.02	0.32	0.30				0.21	0.06	
Control Delay	26.8	24.7		6.9	6.1	1.2				26.1	23.2	
Queue Delay	0.0	0.0		0.0	0.3	0.5				0.0	0.0	
Total Delay	26.8	24.7		6.9	6.5	1.7				26.1	23.2	
LOS	C	C		A	A	A				C	C	
Approach Delay		24.7			5.0						25.7	
Approach LOS		C			A						C	
Queue Length 50th (ft)	3	78		2	41	0				51	13	
Queue Length 95th (ft)	13	114		m2	55	m6				80	34	
Internal Link Dist (ft)		718			243			604			1034	
Turn Bay Length (ft)	50			100						180		
Base Capacity (vph)	64	1092		545	1934	978				1115	602	
Starvation Cap Reductn	0	0		0	713	356				0	0	
Spillback Cap Reductn	0	0		0	0	0				0	0	
Storage Cap Reductn	0	0		0	0	0				0	0	
Reduced v/c Ratio	0.09	0.30		0.02	0.50	0.47				0.20	0.05	

Lane Group	ø3
Lane Configurations	
Volume (vph)	
Ideal Flow (vphpl)	
Lane Width (ft)	
Storage Length (ft)	
Storage Lanes	
Taper Length (ft)	
Right Turn on Red	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Heavy Vehicles (%)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Turn Type	
Protected Phases	3
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	6.0
Minimum Split (s)	15.0
Total Split (s)	24.0
Total Split (%)	24%
Yellow Time (s)	3.5
All-Red Time (s)	2.5
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Recall Mode	Max
Act Effct Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	
Queue Length 95th (ft)	
Internal Link Dist (ft)	
Turn Bay Length (ft)	
Base Capacity (vph)	
Starvation Cap Reductn	
Spillback Cap Reductn	
Storage Cap Reductn	
Reduced v/c Ratio	

**Intersection Summary**

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 32 (32%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 65

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.79

Intersection Signal Delay: 12.8

Intersection LOS: B

Intersection Capacity Utilization 29.6%

ICU Level of Service A

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

**Splits and Phases: 26: Pitkin St/University Ave & Main St**

## Timings

30: S Union St &amp; East Ave

1/7/2014

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↑	↑↑		↑	↑	
Volume (vph)	28	191	35	160	331	78	124	532	78	198	410	34
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	175		0	100		0	250		0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (ft)	75			75			75			75		
Right Turn on Red			No			Yes			Yes			No
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		148			496			437			655	
Travel Time (s)		3.4			11.3			9.9			14.9	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%	5%	5%	5%	4%	4%	4%
Shared Lane Traffic (%)												
Lane Group Flow (vph)	31	251	0	178	455	0	138	678	0	220	494	0
Turn Type	pm+pt	NA										
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4			8			2			6		
Detector Phase	7	4		3	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	6.0	20.0		6.0	20.0		6.0	20.0		6.0	20.0	
Minimum Split (s)	12.0	28.0		12.0	28.0		11.5	25.5		11.5	25.5	
Total Split (s)	12.0	30.0		14.0	32.0		12.0	35.0		15.0	38.0	
Total Split (%)	12.0%	30.0%		14.0%	32.0%		12.0%	35.0%		15.0%	38.0%	
Yellow Time (s)	3.5	3.5		3.5	3.5		3.5	3.5		3.5	3.5	
All-Red Time (s)	2.5	2.5		2.5	2.5		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)	-1.5	-1.5		-1.5	-1.5		-1.5	-1.5		-1.5	-1.5	
Total Lost Time (s)	4.5	4.5		4.5	4.5		4.0	4.0		4.0	4.0	
Lead/Lag	Lead	Lag										
Lead-Lag Optimize?	Yes	Yes										
Recall Mode	None	Min		None	Min		None	C-Max		None	C-Max	
Act Effct Green (s)	31.4	23.9		36.4	30.7		39.1	31.1		44.9	34.0	
Actuated g/C Ratio	0.31	0.24		0.36	0.31		0.39	0.31		0.45	0.34	
v/c Ratio	0.14	0.59		0.51	0.82		0.60	0.64		0.72	0.81	
Control Delay	20.6	39.7		27.1	46.6		26.9	20.9		28.4	39.8	
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	
Total Delay	20.6	39.7		27.1	46.6		26.9	20.9		28.4	39.8	
LOS	C	D		C	D		C	C		C	D	
Approach Delay		37.6			41.1			21.9			36.3	
Approach LOS		D			D			C			D	
Queue Length 50th (ft)	12	139		75	274		20	167		77	306	
Queue Length 95th (ft)	31	219		126	#465		m74	227		#141	#454	
Internal Link Dist (ft)		68			416			357			575	
Turn Bay Length (ft)				175			100			250		
Base Capacity (vph)	228	455		347	552		229	1059		307	613	
Starvation Cap Reductn	0	0		0	0		0	0		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	1	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.14	0.55		0.51	0.82		0.60	0.64		0.72	0.81	

## Intersection Summary

Lane Group	ø9
Lane Configurations	
Volume (vph)	
Ideal Flow (vphpl)	
Storage Length (ft)	
Storage Lanes	
Taper Length (ft)	
Right Turn on Red	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Heavy Vehicles (%)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Turn Type	
Protected Phases	9
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	4.0
Minimum Split (s)	6.0
Total Split (s)	6.0
Total Split (%)	6%
Yellow Time (s)	2.0
All-Red Time (s)	0.0
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Recall Mode	Max
Act Effct Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	
Queue Length 95th (ft)	
Internal Link Dist (ft)	
Turn Bay Length (ft)	
Base Capacity (vph)	
Starvation Cap Reductn	
Spillback Cap Reductn	
Storage Cap Reductn	
Reduced v/c Ratio	
<b>Intersection Summary</b>	

## Timings

30: S Union St &amp; East Ave

1/7/2014

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 0 (0%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green, Master Intersection

Natural Cycle: 85

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.82

Intersection Signal Delay: 32.9

Intersection LOS: C

Intersection Capacity Utilization 71.8%

ICU Level of Service C


Analysis Period (min) 15

# 95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 30: S Union St &amp; East Ave

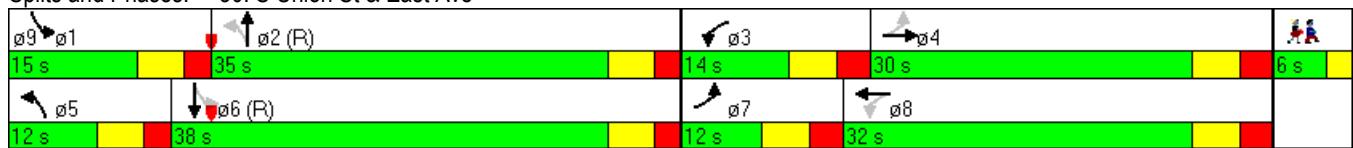



## Timings

30: S Union St &amp; East Ave

1/7/2014

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑↑			↑↑		↑	↑↑		↑	↑	
Volume (vph)	28	191	35	160	331	78	124	532	78	198	410	34
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	175		0	100		0	250		0
Storage Lanes	0		0	0		0	1		0	1		0
Taper Length (ft)	75			75			75			75		
Right Turn on Red			No			Yes			Yes			No
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		148			324			437			655	
Travel Time (s)		3.4			7.4			9.9			14.9	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	4%	4%	4%	4%	4%	4%	5%	5%	5%	4%	4%	4%
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	282	0	0	633	0	138	678	0	220	494	0
Turn Type	Perm	NA		Perm	NA		pm+pt	NA		pm+pt	NA	
Protected Phases		4			8		5	2		1	6	
Permitted Phases	4			8			2			6		
Detector Phase	4	4		8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	20.0	20.0		20.0	20.0		6.0	20.0		6.0	20.0	
Minimum Split (s)	28.0	28.0		28.0	28.0		11.5	25.5		11.5	25.5	
Total Split (s)	37.0	37.0		37.0	37.0		12.0	39.0		18.0	45.0	
Total Split (%)	37.0%	37.0%		37.0%	37.0%		12.0%	39.0%		18.0%	45.0%	
Yellow Time (s)	3.5	3.5		3.5	3.5		3.5	3.5		3.5	3.5	
All-Red Time (s)	2.5	2.5		2.5	2.5		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		-1.5			-1.5		-1.5	-1.5		-1.5	-1.5	
Total Lost Time (s)		4.5			4.5		4.0	4.0		4.0	4.0	
Lead/Lag							Lead	Lag		Lead	Lag	
Lead-Lag Optimize?							Yes	Yes		Yes	Yes	
Recall Mode	Min	Min		Min	Min		None	C-Max		None	C-Max	
Act Effct Green (s)	29.6			29.6			44.2	36.2		52.6	41.0	
Actuated g/C Ratio	0.30			0.30			0.44	0.36		0.53	0.41	
v/c Ratio	0.35			0.83			0.41	0.55		0.56	0.67	
Control Delay	28.4			42.1			12.0	16.9		15.5	28.7	
Queue Delay	0.0			0.0			0.0	0.0		0.0	0.1	
Total Delay	28.4			42.1			12.0	16.9		15.5	28.8	
LOS	C		D		B	B			B	C		
Approach Delay	28.4			42.1			16.1				24.7	
Approach LOS	C		D		B						C	
Queue Length 50th (ft)	72		186		13	152		58	285			
Queue Length 95th (ft)	106		253		m37	217		101	398			
Internal Link Dist (ft)	68		244			357				575		
Turn Bay Length (ft)					100				250			
Base Capacity (vph)	884		833		336	1232		413	740			
Starvation Cap Reductn	0		0		0	0		0	0			
Spillback Cap Reductn	0		0		0	0		0	10			
Storage Cap Reductn	0		0		0	0		0	0			
Reduced v/c Ratio	0.32		0.76		0.41	0.55		0.53	0.68			

## Intersection Summary

Lane Group	ø9
Lane Configurations	
Volume (vph)	
Ideal Flow (vphpl)	
Storage Length (ft)	
Storage Lanes	
Taper Length (ft)	
Right Turn on Red	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Heavy Vehicles (%)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Turn Type	
Protected Phases	9
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	4.0
Minimum Split (s)	6.0
Total Split (s)	6.0
Total Split (%)	6%
Yellow Time (s)	2.0
All-Red Time (s)	0.0
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Recall Mode	Max
Act Effct Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	
Queue Length 95th (ft)	
Internal Link Dist (ft)	
Turn Bay Length (ft)	
Base Capacity (vph)	
Starvation Cap Reductn	
Spillback Cap Reductn	
Storage Cap Reductn	
Reduced v/c Ratio	
<b>Intersection Summary</b>	

## Timings

30: S Union St &amp; East Ave

1/7/2014

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 0 (0%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green, Master Intersection

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.83

Intersection Signal Delay: 26.8

Intersection LOS: C


Intersection Capacity Utilization 78.0%

ICU Level of Service D

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 30: S Union St &amp; East Ave

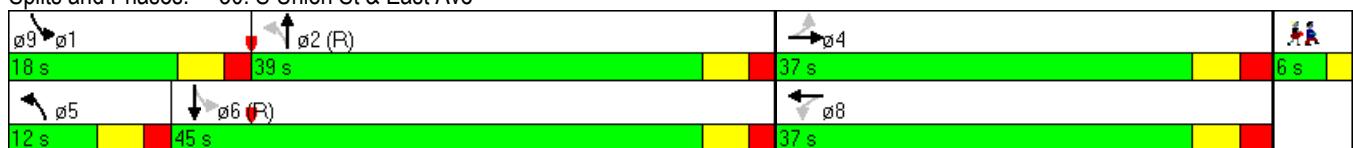

## HCM Unsignalized Intersection Capacity Analysis

11: East Ave

1/7/2014

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑			↖						↗	
Volume (veh/h)	0	590	5	5	443	0	0	0	0	10	10	10
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	0	656	6	6	492	0	0	0	0	11	11	11
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s)												
Percent Blockage												
Right turn flare (veh)												
Median type		None			None							
Median storage veh)												
Upstream signal (ft)					148							
pX, platoon unblocked	0.76					0.76	0.76		0.76	0.76	0.76	0.76
vC, conflicting volume	492			661		1178	1162	658	1162	1164	492	
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	167			661		1075	1053	658	1053	1056	167	
tC, single (s)	4.1			4.1		7.1	6.5	6.2	7.1	6.5	6.2	
tC, 2 stage (s)												
tF (s)	2.2			2.2		3.5	4.0	3.3	3.5	4.0	3.3	
p0 queue free %	100			99		100	100	100	93	93	98	
cM capacity (veh/h)	1067			923		140	172	468	154	170	665	
Direction, Lane #	EB 1	WB 1	SB 1									
Volume Total	661	498	33									
Volume Left	0	6	11									
Volume Right	6	0	11									
cSH	1700	923	216									
Volume to Capacity	0.39	0.01	0.15									
Queue Length 95th (ft)	0	0	13									
Control Delay (s)	0.0	0.2	24.6									
Lane LOS		A	C									
Approach Delay (s)	0.0	0.2	24.6									
Approach LOS			C									
<b>Intersection Summary</b>												
Average Delay			0.8									
Intersection Capacity Utilization		41.4%			ICU Level of Service					A		
Analysis Period (min)			15									

## HCM Unsignalized Intersection Capacity Analysis

24: S Union St &amp; Inner Loop

1/7/2014

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (veh/h)	10	0	464	0	0	20	433	483	0	0	123	5
Sign Control		Stop			Stop			Free			Free	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	11	0	516	0	0	22	481	537	0	0	137	6
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s)												
Percent Blockage												
Right turn flare (veh)												
Median type							TWLTL	TWLTL				
Median storage veh)							2	2				
Upstream signal (ft)							974	318				
pX, platoon unblocked	0.82	0.82	0.96	0.82	0.82	0.80	0.96				0.80	
vC, conflicting volume	1661	1638	139	2154	1641	537	142				537	
vC1, stage 1 conf vol	139	139		1499	1499							
vC2, stage 2 conf vol	1521	1499		655	142							
vCu, unblocked vol	1583	1556	81	2182	1559	300	84				300	
tC, single (s)	7.1	6.5	6.2	7.1	6.5	6.2	4.1				4.1	
tC, 2 stage (s)	6.1	5.5		6.1	5.5							
tF (s)	3.5	4.0	3.3	3.5	4.0	3.3	2.2				2.2	
p0 queue free %	85	100	45	100	100	96	67				100	
cM capacity (veh/h)	74	97	938	9	96	594	1451				1012	
Direction, Lane #	EB 1	WB 1	NB 1	NB 2	SB 1							
Volume Total	527	22	481	537	142							
Volume Left	11	0	481	0	0							
Volume Right	516	22	0	0	6							
cSH	753	594	1451	1700	1700							
Volume to Capacity	0.70	0.04	0.33	0.32	0.08							
Queue Length 95th (ft)	145	3	37	0	0							
Control Delay (s)	20.1	11.3	8.7	0.0	0.0							
Lane LOS	C	B	A									
Approach Delay (s)	20.1	11.3	4.1		0.0							
Approach LOS	C	B										
<b>Intersection Summary</b>												
Average Delay			8.8									
Intersection Capacity Utilization			70.0%		ICU Level of Service						C	
Analysis Period (min)			15									



Movement	WBL	WBR	NBT	NBR	SBL	SBT
Lane Configurations	W		B			T
Volume (veh/h)	37	13	725	41	6	665
Sign Control	Stop		Free			Free
Grade	0%		0%			0%
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	41	14	806	46	7	739
Pedestrians						
Lane Width (ft)						
Walking Speed (ft/s)						
Percent Blockage						
Right turn flare (veh)						
Median type			TWLTL			None
Median storage veh)			2			
Upstream signal (ft)			1017			240
pX, platoon unblocked	0.79	0.84			0.84	
vC, conflicting volume	1581	828			851	
vC1, stage 1 conf vol	828					
vC2, stage 2 conf vol	752					
vCu, unblocked vol	1142	699			726	
tC, single (s)	6.4	6.2			4.1	
tC, 2 stage (s)	5.4					
tF (s)	3.5	3.3			2.2	
p0 queue free %	88	96			99	
cM capacity (veh/h)	337	369			735	
Direction, Lane #	WB 1	NB 1	SB 1			
Volume Total	56	851	746			
Volume Left	41	0	7			
Volume Right	14	46	0			
cSH	345	1700	735			
Volume to Capacity	0.16	0.50	0.01			
Queue Length 95th (ft)	14	0	1			
Control Delay (s)	17.4	0.0	0.2			
Lane LOS	C		A			
Approach Delay (s)	17.4	0.0	0.2			
Approach LOS	C					
<b>Intersection Summary</b>						
Average Delay			0.7			
Intersection Capacity Utilization			50.6%	ICU Level of Service		A
Analysis Period (min)			15			

## HCM Unsignalized Intersection Capacity Analysis

41: S Union St &amp; Charlotte St

1/7/2014

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔			↔		↑	↑↔		↑	↑↔	
Volume (veh/h)	10	50	5	12	55	29	43	812	15	22	594	5
Sign Control		Stop			Stop			Free			Free	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	11	56	6	13	61	32	48	902	17	24	660	6
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s)												
Percent Blockage												
Right turn flare (veh)												
Median type								TWLTL			TWLTL	
Median storage veh)								2			2	
Upstream signal (ft)								655			637	
pX, platoon unblocked	0.79	0.79	0.98	0.79	0.79	0.78	0.98				0.78	
vC, conflicting volume	1321	1726	663	1748	1721	459	666				919	
vC1, stage 1 conf vol	712	712		1006	1006							
vC2, stage 2 conf vol	609	1014		742	714							
vCu, unblocked vol	811	1323	647	1351	1316	0	650				342	
tC, single (s)	7.5	6.5	6.9	7.5	6.5	6.9	4.1				4.1	
tC, 2 stage (s)	6.5	5.5		6.5	5.5							
tF (s)	3.5	4.0	3.3	3.5	4.0	3.3	2.2				2.2	
p0 queue free %	97	82	99	94	79	96	95				97	
cM capacity (veh/h)	341	301	406	225	294	849	915				951	
Direction, Lane #	EB 1	WB 1	NB 1	NB 2	NB 3	SB 1	SB 2					
Volume Total	72	107	48	601	317	24	666					
Volume Left	11	13	48	0	0	24	0					
Volume Right	6	32	0	0	17	0	6					
cSH	313	350	915	1700	1700	951	1700					
Volume to Capacity	0.23	0.31	0.05	0.35	0.19	0.03	0.39					
Queue Length 95th (ft)	22	32	4	0	0	2	0					
Control Delay (s)	19.9	19.8	9.2	0.0	0.0	8.9	0.0					
Lane LOS	C	C	A			A						
Approach Delay (s)	19.9	19.8	0.5			0.3						
Approach LOS	C	C										
<b>Intersection Summary</b>												
Average Delay			2.3									
Intersection Capacity Utilization			49.1%			ICU Level of Service					A	
Analysis Period (min)			15									

## HCM Unsignalized Intersection Capacity Analysis

49: Pitkin St &amp; Charlotte St

1/7/2014

Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↑			↖						↗	
Volume (veh/h)	0	55	5	2	101	0	0	0	0	10	33	5
Sign Control		Free			Free			Stop			Stop	
Grade		0%			0%			0%			0%	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Hourly flow rate (vph)	0	61	6	2	112	0	0	0	0	11	37	6
Pedestrians												
Lane Width (ft)												
Walking Speed (ft/s)												
Percent Blockage												
Right turn flare (veh)												
Median type		None			None							
Median storage veh)												
Upstream signal (ft)												
pX, platoon unblocked												
vC, conflicting volume	112			67			204	181	64	181	183	112
vC1, stage 1 conf vol												
vC2, stage 2 conf vol												
vCu, unblocked vol	112			67			204	181	64	181	183	112
tC, single (s)	4.1			4.1			7.1	6.5	6.2	7.1	6.5	6.2
tC, 2 stage (s)												
tF (s)	2.2			2.2			3.5	4.0	3.3	3.5	4.0	3.3
p0 queue free %	100			100			100	100	100	99	95	99
cM capacity (veh/h)	1477			1535			723	716	1006	782	712	943
Direction, Lane #	EB 1	WB 1	SB 1									
Volume Total	67	114	53									
Volume Left	0	2	11									
Volume Right	6	0	6									
cSH	1700	1535	745									
Volume to Capacity	0.04	0.00	0.07									
Queue Length 95th (ft)	0	0	6									
Control Delay (s)	0.0	0.2	10.2									
Lane LOS		A	B									
Approach Delay (s)	0.0	0.2	10.2									
Approach LOS			B									
<b>Intersection Summary</b>												
Average Delay			2.4									
Intersection Capacity Utilization			16.9%		ICU Level of Service					A		
Analysis Period (min)			15									



Movement	EBL	EBT	WBT	WBR	SBL	SBR
Lane Configurations		↑↑	↑		✗	
Volume (veh/h)	0	441	125	0	10	10
Sign Control		Free	Free		Stop	
Grade		0%	0%		0%	
Peak Hour Factor	0.86	0.86	0.86	0.86	0.86	0.86
Hourly flow rate (vph)	0	513	145	0	12	12
Pedestrians						
Lane Width (ft)						
Walking Speed (ft/s)						
Percent Blockage						
Right turn flare (veh)						
Median type		None	None			
Median storage veh)						
Upstream signal (ft)			134			
pX, platoon unblocked						
vC, conflicting volume	145			402	145	
vC1, stage 1 conf vol						
vC2, stage 2 conf vol						
vCu, unblocked vol	145			402	145	
tC, single (s)	4.1			6.8	6.9	
tC, 2 stage (s)						
tF (s)	2.2			3.5	3.3	
p0 queue free %	100			98	99	
cM capacity (veh/h)	1434			579	879	
Direction, Lane #	EB 1	EB 2	WB 1	SB 1		
Volume Total	256	256	145	23		
Volume Left	0	0	0	12		
Volume Right	0	0	0	12		
cSH	1700	1700	1700	698		
Volume to Capacity	0.15	0.15	0.09	0.03		
Queue Length 95th (ft)	0	0	0	3		
Control Delay (s)	0.0	0.0	0.0	10.3		
Lane LOS				B		
Approach Delay (s)	0.0		0.0	10.3		
Approach LOS				B		
<b>Intersection Summary</b>						
Average Delay			0.4			
Intersection Capacity Utilization		22.2%		ICU Level of Service		A
Analysis Period (min)		15				

## Timings

2: Monroe Ave/Chestnut Street &amp; Inner Loop/Howell St

1/7/2014

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑↑		↑	↑		↑	↑	↑
Volume (vph)	94	276	84	23	641	21	263	340	15	31	536	1285
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	200		0	100		250	250		0	100		0
Storage Lanes	1		0	1		1	1		0	1		1
Taper Length (ft)	75			75			75			75		
Right Turn on Red			Yes			No			Yes			Yes
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		973			457			741			768	
Travel Time (s)		22.1			10.4			16.8			17.5	
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Shared Lane Traffic (%)												
Lane Group Flow (vph)	99	379	0	24	697	0	277	374	0	33	564	1353
Turn Type	pm+pt	NA		pm+pt	NA		pm+pt	NA		Perm	NA	Free
Protected Phases	7	4		3	8		5	2			6	
Permitted Phases	4			8			2			6		Free
Detector Phase	7	4		3	8		5	2		6	6	
Switch Phase												
Minimum Initial (s)	7.0	10.0		7.0	10.0		7.0	10.0		10.0	10.0	
Minimum Split (s)	13.5	28.5		13.5	28.5		13.5	23.5		23.5	23.5	
Total Split (s)	14.0	29.0		14.0	29.0		16.0	51.0		35.0	35.0	
Total Split (%)	14.0%	29.0%		14.0%	29.0%		16.0%	51.0%		35.0%	35.0%	
Yellow Time (s)	3.5	3.5		3.5	3.5		3.5	3.5		3.5	3.5	
All-Red Time (s)	3.0	3.0		3.0	3.0		3.0	3.0		3.0	3.0	
Lost Time Adjust (s)	-1.5	-1.5		-1.5	-1.5		-1.5	-1.5		-1.5	-1.5	
Total Lost Time (s)	5.0	5.0		5.0	5.0		5.0	5.0		5.0	5.0	
Lead/Lag	Lead	Lag		Lead	Lag		Lead			Lag	Lag	
Lead-Lag Optimize?	Yes			Yes			Yes			Yes	Yes	
Recall Mode	None	Min		None	Min		None	C-Max		C-Max	C-Max	
Act Effect Green (s)	32.7	29.1		30.3	23.4		49.4	49.4		31.5	31.5	100.0
Actuated g/C Ratio	0.33	0.29		0.30	0.23		0.49	0.49		0.32	0.32	1.00
v/c Ratio	0.43	0.71		0.09	0.85		0.89	0.41		0.10	0.96	0.85
Control Delay	27.3	40.0		11.0	30.8		54.9	14.8		26.6	64.7	6.6
Queue Delay	0.0	0.0		0.0	0.0		0.0	0.0		0.0	0.0	0.0
Total Delay	27.3	40.0		11.0	30.8		54.9	14.8		26.6	64.7	6.6
LOS	C	D		B	C		D	B		C	E	A
Approach Delay		37.4			30.2			31.8			23.7	
Approach LOS		D			C			C			C	
Queue Length 50th (ft)	41	179		5	188		~109	112		15	~365	0
Queue Length 95th (ft)	77	#385		m7	m#267		#289	139		39	#585	0
Internal Link Dist (ft)		893			377			661			688	
Turn Bay Length (ft)	200			100			250			100		
Base Capacity (vph)	229	543		285	845		311	916		316	586	1583
Starvation Cap Reductn	0	0		0	0		0	0		0	0	0
Spillback Cap Reductn	0	0		0	0		0	0		0	0	0
Storage Cap Reductn	0	0		0	0		0	0		0	0	0
Reduced v/c Ratio	0.43	0.70		0.08	0.82		0.89	0.41		0.10	0.96	0.85

## Intersection Summary

Area Type: Other

Lane Group	ø9
Lane Configurations	
Volume (vph)	
Ideal Flow (vphpl)	
Storage Length (ft)	
Storage Lanes	
Taper Length (ft)	
Right Turn on Red	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Turn Type	
Protected Phases	9
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	4.0
Minimum Split (s)	6.0
Total Split (s)	6.0
Total Split (%)	6%
Yellow Time (s)	2.0
All-Red Time (s)	0.0
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Recall Mode	Max
Act Effect Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	
Queue Length 95th (ft)	
Internal Link Dist (ft)	
Turn Bay Length (ft)	
Base Capacity (vph)	
Starvation Cap Reductn	
Spillback Cap Reductn	
Storage Cap Reductn	
Reduced v/c Ratio	
<u>Intersection Summary</u>	

## Timings

2: Monroe Ave/Chestnut Street & Inner Loop/Howell St

1/7/2014

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 0 (0%), Referenced to phase 2:NBTL and 6:SBTL, Start of Green, Master Intersection

Natural Cycle: 95

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.96

Intersection Signal Delay: 28.1

Intersection LOS: C

Intersection Capacity Utilization 84.9%

ICU Level of Service E

Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.


Queue shown is maximum after two cycles.

# 95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 2: Monroe Ave/Chestnut Street & Inner Loop/Howell St

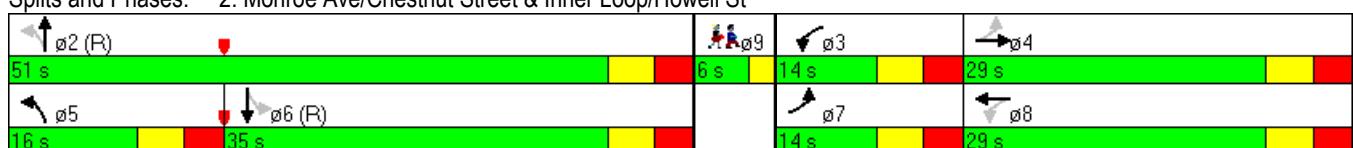

## Timings

3: S Union St &amp; Howell St

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations		↔			↔			↔			↔	
Volume (vph)	374	5	6	5	5	5	6	389	5	5	153	580
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	0		0	0		0	150		0
Storage Lanes	0		0	0		0	0		0	0		0
Taper Length (ft)	25			25			25			75		
Right Turn on Red			Yes			Yes			Yes			Yes
Link Speed (mph)		30			25			30			30	
Link Distance (ft)		339			304			503			434	
Travel Time (s)		7.7			8.3			11.4			9.9	
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	405	0	0	15	0	0	420	0	0	777	0
Turn Type	Perm	NA										
Protected Phases		4			8			2			6	
Permitted Phases	4			8			2			6	6	
Detector Phase	4	4		8	8		2	2		6	6	
Switch Phase												
Minimum Initial (s)	10.0	10.0		10.0	10.0		10.0	10.0		10.0	10.0	
Minimum Split (s)	19.5	19.5		19.5	19.5		22.5	22.5		22.5	22.5	
Total Split (s)	41.0	41.0		41.0	41.0		53.0	53.0		53.0	53.0	
Total Split (%)	41.0%	41.0%		41.0%	41.0%		53.0%	53.0%		53.0%	53.0%	
Yellow Time (s)	3.5	3.5		3.5	3.5		3.5	3.5		3.5	3.5	
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		-1.5			-1.5			-1.5			-1.5	
Total Lost Time (s)		4.0			4.0			4.0			4.0	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		Min	Min		Min	Min	
Act Effect Green (s)		43.1			43.1			42.9			42.9	
Actuated g/C Ratio		0.43			0.43			0.43			0.43	
v/c Ratio		0.70			0.02			0.53			0.90	
Control Delay		20.9			16.0			21.4			19.7	
Queue Delay		0.0			0.0			0.2			0.0	
Total Delay		20.9			16.0			21.6			19.7	
LOS		C			B			C			B	
Approach Delay		20.9			16.0			21.6			19.7	
Approach LOS		C			B			C			B	
Queue Length 50th (ft)		248			4			121			91	
Queue Length 95th (ft)		#407			18			179			#117	
Internal Link Dist (ft)		259			224			423			354	
Turn Bay Length (ft)												
Base Capacity (vph)		578			700			902			946	
Starvation Cap Reductn		0			0			100			0	
Spillback Cap Reductn		0			0			0			0	
Storage Cap Reductn		0			0			0			0	
Reduced v/c Ratio		0.70			0.02			0.52			0.82	
Intersection Summary												
Area Type:	Other											

Lane Group	ø9
Lane Configurations	
Volume (vph)	
Ideal Flow (vphpl)	
Storage Length (ft)	
Storage Lanes	
Taper Length (ft)	
Right Turn on Red	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Turn Type	
Protected Phases	9
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	4.0
Minimum Split (s)	6.0
Total Split (s)	6.0
Total Split (%)	6%
Yellow Time (s)	2.0
All-Red Time (s)	0.0
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Recall Mode	Max
Act Effect Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	
Queue Length 95th (ft)	
Internal Link Dist (ft)	
Turn Bay Length (ft)	
Base Capacity (vph)	
Starvation Cap Reductn	
Spillback Cap Reductn	
Storage Cap Reductn	
Reduced v/c Ratio	
<u>Intersection Summary</u>	

## Timings

3: S Union St & Howell St

1/7/2014

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 69 (69%), Referenced to phase 4:EBTL and 8:WBTL, Start of Green

Natural Cycle: 50

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.90

Intersection Signal Delay: 20.5

Intersection LOS: C

Intersection Capacity Utilization 81.5%


ICU Level of Service D

Analysis Period (min) 15

# 95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

Splits and Phases: 3: S Union St & Howell St

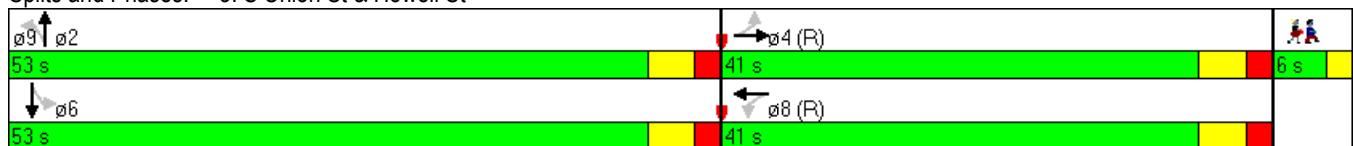

## Timings

5: S Union St &amp; Monroe Ave

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑			↑		↑	↑	↑		↔	
Volume (vph)	6	615	0	0	519	196	100	198	37	153	0	6
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	12	10	12	12	12	12	10	12	13	12	12	12
Storage Length (ft)	100		100	0		100	80		0	0		0
Storage Lanes	1		0	0		0	1		1	0		0
Taper Length (ft)	75			25			75			25		
Right Turn on Red			Yes			Yes			Yes			Yes
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		741			446			805			503	
Travel Time (s)		16.8			10.1			18.3			11.4	
Peak Hour Factor	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95	0.95
Heavy Vehicles (%)	1%	1%	1%	3%	3%	3%	2%	2%	2%	1%	1%	1%
Shared Lane Traffic (%)												
Lane Group Flow (vph)	6	647	0	0	752	0	105	208	39	0	167	0
Turn Type	Perm	NA			NA		Perm	NA	Perm	Perm	NA	
Protected Phases		2			6			8			4	
Permitted Phases	2						8		8	4		
Detector Phase	2	2			6		8	8	8	4	4	
Switch Phase												
Minimum Initial (s)	9.0	9.0			9.0		7.0	7.0	7.0	7.0	7.0	
Minimum Split (s)	24.0	24.0			24.0		22.0	22.0	22.0	22.0	22.0	
Total Split (s)	66.0	66.0			66.0		34.0	34.0	34.0	34.0	34.0	
Total Split (%)	66.0%	66.0%			66.0%		34.0%	34.0%	34.0%	34.0%	34.0%	
Yellow Time (s)	4.0	4.0			4.0		4.0	4.0	4.0	4.0	4.0	
All-Red Time (s)	2.0	2.0			2.0		2.0	2.0	2.0	2.0	2.0	
Lost Time Adjust (s)	-1.5	-1.5			-1.5		-1.5	-1.5	-1.5		-1.5	
Total Lost Time (s)	4.5	4.5			4.5		4.5	4.5	4.5		4.5	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max			C-Max		None	None	None	None	None	
Act Effct Green (s)	69.7	69.7			69.7		21.3	21.3	21.3		21.3	
Actuated g/C Ratio	0.70	0.70			0.70		0.21	0.21	0.21		0.21	
v/c Ratio	0.02	0.53			0.60		0.37	0.53	0.10		0.84	
Control Delay	10.5	15.1			11.4		35.4	38.4	9.3		41.8	
Queue Delay	0.0	0.0			0.0		0.0	0.0	0.0		0.0	
Total Delay	10.5	15.1			11.4		35.4	38.4	9.3		41.8	
LOS	B	B			B		D	D	A		D	
Approach Delay		15.0			11.4			34.3			41.8	
Approach LOS		B			B			C			D	
Queue Length 50th (ft)	1	206			211		57	118	0		67	
Queue Length 95th (ft)	m2	m231			412		96	170	24		m75	
Internal Link Dist (ft)		661			366			725			423	
Turn Bay Length (ft)	100						80					
Base Capacity (vph)	374	1223			1248		393	549	510		261	
Starvation Cap Reductn	0	0			0		0	0	0		0	
Spillback Cap Reductn	0	0			0		0	0	0		0	
Storage Cap Reductn	0	0			0		0	0	0		0	
Reduced v/c Ratio	0.02	0.53			0.60		0.27	0.38	0.08		0.64	

**Intersection Summary**

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 74 (74%), Referenced to phase 2:EBTL and 6:WBT, Start of Green

Natural Cycle: 60

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.84

Intersection Signal Delay: 19.4

Intersection LOS: B

Intersection Capacity Utilization 69.8%

ICU Level of Service C

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

**Splits and Phases:** 5: S Union St & Monroe Ave

## Timings

12: S Union St &amp; Main St

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑↑		↑	↑↑↑			↑	↑		↔	
Volume (vph)	6	1030	0	98	958	72	6	116	226	32	0	56
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	10	10	13	10	10	10	12	12	12	12	12	12
Storage Length (ft)	100		0	100		0	0		0	0		0
Storage Lanes	1		0	1		0	0		1	0		0
Taper Length (ft)	40			75			25			25		
Right Turn on Red			Yes			Yes			Yes		Yes	
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		279			1119			376			743	
Travel Time (s)		6.3			25.4			8.5			16.9	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	3%	3%	3%	4%	4%	4%	2%	2%	2%	4%	4%	4%
Shared Lane Traffic (%)												
Lane Group Flow (vph)	7	1144	0	109	1144	0	0	136	251	0	98	0
Turn Type	pm+pt	NA		pm+pt	NA		Perm	NA	Perm	Perm	NA	
Protected Phases	2	1		2	1			3			3	
Permitted Phases	1			1			3		3	3		
Detector Phase	2	1		2	1		3	3	3	3	3	
Switch Phase												
Minimum Initial (s)	6.0	7.0		6.0	7.0		6.0	6.0	6.0	6.0	6.0	
Minimum Split (s)	15.0	31.0		15.0	31.0		15.0	15.0	15.0	15.0	15.0	
Total Split (s)	37.0	39.0		37.0	39.0		24.0	24.0	24.0	24.0	24.0	
Total Split (%)	37.0%	39.0%		37.0%	39.0%		24.0%	24.0%	24.0%	24.0%	24.0%	
Yellow Time (s)	3.5	3.5		3.5	3.5		3.5	3.5	3.5	3.5	3.5	
All-Red Time (s)	2.5	2.5		2.5	2.5		2.5	2.5	2.5	2.5	2.5	
Lost Time Adjust (s)	-1.5	-1.5		-1.5	-1.5		-1.5	-1.5	-1.5	-1.5	-1.5	
Total Lost Time (s)	4.5	4.5		4.5	4.5		4.5	4.5	4.5	4.5	4.5	
Lead/Lag	Lag	Lead		Lag	Lead							
Lead-Lag Optimize?	Yes	Yes		Yes	Yes							
Recall Mode	None	C-Max		None	C-Max		Max	Max	Max	Max	Max	
Act Effct Green (s)	63.3	34.5		63.3	34.5			23.2	23.2			23.2
Actuated g/C Ratio	0.63	0.34		0.63	0.34			0.23	0.23			0.23
v/c Ratio	0.01	0.71		0.20	0.72			0.32	0.45			0.24
Control Delay	1.0	27.2		12.3	31.2			48.0	18.9			8.8
Queue Delay	0.0	2.2		0.0	0.0			0.0	0.4			0.0
Total Delay	1.0	29.4		12.3	31.2			48.0	19.4			8.8
LOS	A	C		B	C			D	B			A
Approach Delay		29.2			29.5			29.4				8.8
Approach LOS		C			C			C				A
Queue Length 50th (ft)	0	137		20	227			64	63			0
Queue Length 95th (ft)	m0	184		34	280			121	123			43
Internal Link Dist (ft)		199			1039			296				663
Turn Bay Length (ft)	100		100									
Base Capacity (vph)	609	1621		603	1598			427	560			408
Starvation Cap Reductn	0	328		0	0			0	80			0
Spillback Cap Reductn	0	0		0	0			0	0			0
Storage Cap Reductn	0	0		0	0			0	0			0
Reduced v/c Ratio	0.01	0.88		0.18	0.72			0.32	0.52			0.24

**Intersection Summary**

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 61 (61%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 65

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.72

Intersection Signal Delay: 28.7

Intersection LOS: C

Intersection Capacity Utilization 50.4%

ICU Level of Service A

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

**Splits and Phases:** 12: S Union St & Main St

## Timings

20: University Ave/Inner Loop Ramps &amp; Main St

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑	↑		↑↑↑		↑	↑↑		↑	↑↑	
Volume (vph)	22	573	199	0	521	499	176	319	1	462	367	6
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	10	10	10	10	10	10	11	12	12	10	10	10
Storage Length (ft)	95		0	0		0	0		0	225		225
Storage Lanes	1		1	0		0	1		0	1		1
Taper Length (ft)	35			25			25			40		
Right Turn on Red			Yes			Yes			Yes			Yes
Link Speed (mph)		30			30			30			40	
Link Distance (ft)		323			279			291			431	
Travel Time (s)		7.3			6.3			6.6			7.3	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	4%	4%	4%	5%	5%	5%	2%	2%	2%	2%	2%	2%
Shared Lane Traffic (%)		10%				10%				41%		
Lane Group Flow (vph)	24	659	199	0	1133	0	176	375	0	303	625	0
Turn Type	Perm	NA	Perm		NA		Split	NA		Split	NA	
Protected Phases		1			1		3	3		2	2	
Permitted Phases	1		1									
Detector Phase	1	1	1		1		3	3		2	2	
Switch Phase												
Minimum Initial (s)	7.0	7.0	7.0		7.0		6.0	6.0		6.0	6.0	
Minimum Split (s)	31.0	31.0	31.0		31.0		15.0	15.0		15.0	15.0	
Total Split (s)	39.0	39.0	39.0		39.0		24.0	24.0		37.0	37.0	
Total Split (%)	39.0%	39.0%	39.0%		39.0%		24.0%	24.0%		37.0%	37.0%	
Yellow Time (s)	3.5	3.5	3.5		3.5		3.5	3.5		3.5	3.5	
All-Red Time (s)	2.5	2.5	2.5		2.5		2.5	2.5		2.5	2.5	
Lost Time Adjust (s)	-1.5	-1.5	-1.5		-1.5		-1.5	-1.5		-1.5	-1.5	
Total Lost Time (s)	4.5	4.5	4.5		4.5		4.5	4.5		4.5	4.5	
Lead/Lag	Lead	Lead	Lead		Lead					Lag	Lag	
Lead-Lag Optimize?	Yes	Yes	Yes		Yes					Yes	Yes	
Recall Mode	C-Max	C-Max	C-Max		C-Max		Max	Max		None	None	
Act Effct Green (s)	34.5	34.5	34.5		34.5		23.2	23.2		28.8	28.8	
Actuated g/C Ratio	0.34	0.34	0.34		0.34		0.23	0.23		0.29	0.29	
v/c Ratio	0.31	0.62	0.34		0.69		0.49	0.48		0.70	0.70	
Control Delay	27.5	21.0	4.5		3.0		45.3	42.2		40.6	35.8	
Queue Delay	0.0	0.5	0.3		0.2		0.5	0.4		0.0	0.1	
Total Delay	27.5	21.5	4.8		3.2		45.8	42.6		40.6	36.0	
LOS	C	C	A		A		D	D		D	D	
Approach Delay		17.9			3.2			43.6			37.5	
Approach LOS		B			A			D			D	
Queue Length 50th (ft)	6	87	0		3		128	136		183	189	
Queue Length 95th (ft)	m12	108	21		3		203	187		280	246	
Internal Link Dist (ft)		243			199			211			351	
Turn Bay Length (ft)	95									225		
Base Capacity (vph)	78	1067	585		1648		361	785		488	1009	
Starvation Cap Reductn	0	91	107		87		33	119		0	0	
Spillback Cap Reductn	0	125	2		0		0	0		0	35	
Storage Cap Reductn	0	0	0		0		0	0		0	0	
Reduced v/c Ratio	0.31	0.70	0.42		0.73		0.54	0.56		0.62	0.64	

**Intersection Summary**

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 61 (61%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 65

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.72

Intersection Signal Delay: 22.4

Intersection LOS: C

Intersection Capacity Utilization 57.7%

ICU Level of Service B

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

**Splits and Phases:** 20: University Ave/Inner Loop Ramps & Main St

## Timings

21: S Union St &amp; University Ave

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↑↑	↑↑			↑	
Volume (vph)	8	558	0	25	447	35	49	306	136	0	98	0
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	100		0	0		0	0		0
Storage Lanes	1		0	1		0	0		0	0		0
Taper Length (ft)	25			75			75			25		
Right Turn on Red			Yes			Yes			Yes			Yes
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		291			310			318			376	
Travel Time (s)		6.6			7.0			7.2			8.5	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Shared Lane Traffic (%)												
Lane Group Flow (vph)	9	620	0	28	536	0	0	545	0	0	109	0
Turn Type	Perm	NA		Perm	NA		Perm	NA			NA	
Protected Phases		4			8			2			6	
Permitted Phases	4			8			2				6	
Detector Phase	4	4		8	8		2	2				
Switch Phase												
Minimum Initial (s)	6.0	6.0		4.0	4.0		6.0	6.0			4.0	
Minimum Split (s)	31.0	31.0		31.0	31.0		31.0	31.0			31.0	
Total Split (s)	58.0	58.0		58.0	58.0		36.0	36.0			36.0	
Total Split (%)	58.0%	58.0%		58.0%	58.0%		36.0%	36.0%			36.0%	
Yellow Time (s)	4.0	4.0		4.0	4.0		4.0	4.0			4.0	
All-Red Time (s)	2.0	2.0		2.0	2.0		2.0	2.0			2.0	
Lost Time Adjust (s)	-1.5	-1.5		-1.5	-1.5			-1.5			-1.5	
Total Lost Time (s)	4.5	4.5		4.5	4.5			4.5			4.5	
Lead/Lag												
Lead-Lag Optimize?												
Recall Mode	C-Max	C-Max		C-Max	C-Max		None	None			None	
Act Effect Green (s)	61.8	61.8		61.8	61.8			23.2			23.2	
Actuated g/C Ratio	0.62	0.62		0.62	0.62			0.23			0.23	
v/c Ratio	0.02	0.54		0.08	0.47			0.72			0.25	
Control Delay	3.8	6.1		9.9	12.7			21.0			46.1	
Queue Delay	0.0	0.6		0.0	0.0			0.0			0.0	
Total Delay	3.8	6.7		9.9	12.7			21.0			46.1	
LOS	A	A		A	B			C			D	
Approach Delay		6.7			12.6			21.0			46.1	
Approach LOS		A			B			C			D	
Queue Length 50th (ft)	0	33		7	165			126			76	
Queue Length 95th (ft)	m1	105		22	290			m147			130	
Internal Link Dist (ft)		211			230			238			296	
Turn Bay Length (ft)				100								
Base Capacity (vph)	434	1151		369	1141			1009			586	
Starvation Cap Reductn	0	215		0	0			0			0	
Spillback Cap Reductn	0	0		0	0			0			0	
Storage Cap Reductn	0	0		0	0			0			0	
Reduced v/c Ratio	0.02	0.66		0.08	0.47			0.54			0.19	
Intersection Summary												
Area Type:	Other											

Lane Group	ø9
Lane Configurations	
Volume (vph)	
Ideal Flow (vphpl)	
Storage Length (ft)	
Storage Lanes	
Taper Length (ft)	
Right Turn on Red	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Turn Type	
Protected Phases	9
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	4.0
Minimum Split (s)	6.0
Total Split (s)	6.0
Total Split (%)	6%
Yellow Time (s)	2.0
All-Red Time (s)	0.0
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Recall Mode	Max
Act Effect Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	
Queue Length 95th (ft)	
Internal Link Dist (ft)	
Turn Bay Length (ft)	
Base Capacity (vph)	
Starvation Cap Reductn	
Spillback Cap Reductn	
Storage Cap Reductn	
Reduced v/c Ratio	
<u>Intersection Summary</u>	

## Timings

21: S Union St & University Ave

1/7/2014

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 78 (78%), Referenced to phase 4:EBTL and 8:WBTL, Start of Green

Natural Cycle: 70

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.72

Intersection Signal Delay: 15.0

Intersection LOS: B

Intersection Capacity Utilization 54.4%

ICU Level of Service A

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 21: S Union St & University Ave



## Timings

23: S Union St &amp; E Broad St

1/7/2014

Lane Group	EBL	EBR	NBL	NBT	SBT	SBR	ø9
Lane Configurations							
Volume (vph)	290	161	65	673	510	60	
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	
Storage Length (ft)	0	0	100			0	
Storage Lanes	1	1	1			0	
Taper Length (ft)	25		75				
Right Turn on Red		No			No		
Link Speed (mph)	30			30	30		
Link Distance (ft)	134			240	437		
Travel Time (s)	3.0			5.5	9.9		
Peak Hour Factor	0.86	0.86	0.86	0.86	0.86	0.86	
Heavy Vehicles (%)	2%	2%	1%	1%	2%	2%	
Shared Lane Traffic (%)							
Lane Group Flow (vph)	337	187	76	783	663	0	
Turn Type	NA	Perm	pm+pt	NA	NA		
Protected Phases	4			5	2	6	9
Permitted Phases				4	2		
Detector Phase	4	4	5	2	6		
Switch Phase							
Minimum Initial (s)	10.0	10.0	8.0	20.0	20.0	4.0	
Minimum Split (s)	24.5	24.5	13.5	25.5	25.5	6.0	
Total Split (s)	30.0	30.0	13.5	64.0	50.5	6.0	
Total Split (%)	30.0%	30.0%	13.5%	64.0%	50.5%	6%	
Yellow Time (s)	3.5	3.5	3.5	3.5	3.5	2.0	
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	0.0	
Lost Time Adjust (s)	-1.5	-1.5	-1.5	-1.5	-1.5		
Total Lost Time (s)	4.0	4.0	4.0	4.0	4.0		
Lead/Lag			Lead		Lag		
Lead-Lag Optimize?			Yes		Yes		
Recall Mode	None	None	None	C-Max	C-Max	Max	
Act Effct Green (s)	23.7	23.7	60.0	60.0	49.2		
Actuated g/C Ratio	0.24	0.24	0.60	0.60	0.49		
v/c Ratio	0.80	0.50	0.23	0.69	0.73		
Control Delay	51.2	37.5	9.2	16.8	15.4		
Queue Delay	0.0	0.0	0.0	0.0	0.2		
Total Delay	51.2	37.5	9.2	16.8	15.7		
LOS	D	D	A	B	B		
Approach Delay	46.3			16.1	15.7		
Approach LOS	D			B	B		
Queue Length 50th (ft)	197	101	15	281	151		
Queue Length 95th (ft)	281	158	m27	328	m179		
Internal Link Dist (ft)	54			160	357		
Turn Bay Length (ft)			100				
Base Capacity (vph)	460	411	333	1128	904		
Starvation Cap Reductn	0	0	0	0	23		
Spillback Cap Reductn	0	0	0	0	0		
Storage Cap Reductn	0	0	0	0	0		
Reduced v/c Ratio	0.73	0.45	0.23	0.69	0.75		

## Intersection Summary

## Timings

23: S Union St &amp; E Broad St

1/7/2014

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 91 (91%), Referenced to phase 2:NBT and 6:SBT, Start of Green

Natural Cycle: 80

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.80

Intersection Signal Delay: 23.7

Intersection LOS: C

Intersection Capacity Utilization 63.2%

ICU Level of Service B

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 23: S Union St &amp; E Broad St



## Timings

26: Pitkin St/University Ave &amp; Main St

1/7/2014

	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑↑		↑	↑↑	↑			↑↑	↑↑	↑	
Volume (vph)	16	558	13	10	474	219	0	0	0	236	27	3
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Lane Width (ft)	10	11	13	10	11	11	12	12	12	12	12	12
Storage Length (ft)	50		0	100		0	0		0	180		0
Storage Lanes	1		0	1		1	0		0	1		0
Taper Length (ft)	25			35			25			75		
Right Turn on Red			Yes			Yes			Yes			Yes
Link Speed (mph)		30			30			25			30	
Link Distance (ft)		798			323			684			1114	
Travel Time (s)		18.1			7.3			18.7			25.3	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	5%	5%	5%	2%	2%	2%	2%	2%	2%	1%	1%	1%
Shared Lane Traffic (%)												
Lane Group Flow (vph)	18	634	0	11	527	243	0	0	0	262	33	0
Turn Type	Perm	NA		Perm	NA	Perm				Split	NA	
Protected Phases		1			1 3					2	2	
Permitted Phases	1			1 3		1 3						
Detector Phase	1	1		1 3	1 3	1 3				2	2	
Switch Phase												
Minimum Initial (s)	7.0	7.0								6.0	6.0	
Minimum Split (s)	31.0	31.0								15.0	15.0	
Total Split (s)	39.0	39.0								37.0	37.0	
Total Split (%)	39.0%	39.0%								37.0%	37.0%	
Yellow Time (s)	3.5	3.5								3.5	3.5	
All-Red Time (s)	2.5	2.5								2.5	2.5	
Lost Time Adjust (s)	-1.5	-1.5								-1.5	-1.5	
Total Lost Time (s)	4.5	4.5								4.5	4.5	
Lead/Lag	Lead	Lead								Lag	Lag	
Lead-Lag Optimize?	Yes	Yes								Yes	Yes	
Recall Mode	C-Max	C-Max								None	None	
Act Effct Green (s)	34.5	34.5		62.2	62.2	62.2				28.8	28.8	
Actuated g/C Ratio	0.34	0.34		0.62	0.62	0.62				0.29	0.29	
v/c Ratio	0.27	0.55		0.02	0.25	0.23				0.26	0.06	
Control Delay	36.3	28.7		6.5	5.2	1.1				27.3	22.6	
Queue Delay	0.0	0.0		0.0	0.2	0.4				0.0	0.0	
Total Delay	36.3	28.7		6.5	5.4	1.5				27.3	22.6	
LOS	D	C		A	A	A				C	C	
Approach Delay		28.9			4.2						26.8	
Approach LOS		C			A						C	
Queue Length 50th (ft)	8	170		1	24	0				64	13	
Queue Length 95th (ft)	31	226		m3	53	m8				94	35	
Internal Link Dist (ft)		718			243			604			1034	
Turn Bay Length (ft)	50			100						180		
Base Capacity (vph)	67	1144		444	2128	1044				1126	604	
Starvation Cap Reductn	0	0		0	867	414				0	0	
Spillback Cap Reductn	0	0		0	0	0				0	0	
Storage Cap Reductn	0	0		0	0	0				0	0	
Reduced v/c Ratio	0.27	0.55		0.02	0.42	0.39				0.23	0.05	

Lane Group	ø3
Lane Configurations	
Volume (vph)	
Ideal Flow (vphpl)	
Lane Width (ft)	
Storage Length (ft)	
Storage Lanes	
Taper Length (ft)	
Right Turn on Red	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Heavy Vehicles (%)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Turn Type	
Protected Phases	3
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	6.0
Minimum Split (s)	15.0
Total Split (s)	24.0
Total Split (%)	24%
Yellow Time (s)	3.5
All-Red Time (s)	2.5
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Recall Mode	Max
Act Effct Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	
Queue Length 95th (ft)	
Internal Link Dist (ft)	
Turn Bay Length (ft)	
Base Capacity (vph)	
Starvation Cap Reductn	
Spillback Cap Reductn	
Storage Cap Reductn	
Reduced v/c Ratio	

**Intersection Summary**

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 61 (61%), Referenced to phase 1:EBWB, Start of Green

Natural Cycle: 65

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.72

Intersection Signal Delay: 17.4

Intersection LOS: B

Intersection Capacity Utilization 30.1%

ICU Level of Service A

Analysis Period (min) 15

m Volume for 95th percentile queue is metered by upstream signal.

**Splits and Phases:** 26: Pitkin St/University Ave & Main St

## Timings

30: S Union St &amp; East Ave

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations	↑	↑		↑	↑		↑	↑↑		↑	↑	
Volume (vph)	42	470	88	90	367	72	50	668	245	229	392	31
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	175		0	100		0	250		0
Storage Lanes	1		0	1		0	1		0	1		0
Taper Length (ft)	75			75			75			75		
Right Turn on Red			No			Yes			Yes			No
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		148			496			437			655	
Travel Time (s)		3.4			11.3			9.9			14.9	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	2%	2%	2%	3%	3%	3%	2%	2%	2%	2%	2%	2%
Shared Lane Traffic (%)												
Lane Group Flow (vph)	47	620	0	100	488	0	56	1014	0	254	470	0
Turn Type	pm+pt	NA										
Protected Phases	7	4		3	8		5	2		1	6	
Permitted Phases	4			8			2			6		
Detector Phase	7	4		3	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	4.0	20.0		4.0	20.0		6.0	20.0		6.0	20.0	
Minimum Split (s)	10.0	28.0		10.0	28.0		11.5	25.5		11.5	25.5	
Total Split (s)	10.0	37.0		10.0	37.0		12.0	33.0		14.0	35.0	
Total Split (%)	10.0%	37.0%		10.0%	37.0%		12.0%	33.0%		14.0%	35.0%	
Yellow Time (s)	3.5	3.5		3.5	3.5		3.5	3.5		3.5	3.5	
All-Red Time (s)	2.5	2.5		2.5	2.5		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)	-1.5	-1.5		-1.5	-1.5		-1.5	-1.5		-1.5	-1.5	
Total Lost Time (s)	4.5	4.5		4.5	4.5		4.0	4.0		4.0	4.0	
Lead/Lag	Lead	Lag										
Lead-Lag Optimize?	Yes	Yes										
Recall Mode	None	Min		None	Min		None	C-Max		None	C-Max	
Act Effct Green (s)	38.9	34.5		39.8	36.5		36.9	29.0		41.4	33.4	
Actuated g/C Ratio	0.39	0.34		0.40	0.36		0.37	0.29		0.41	0.33	
v/c Ratio	0.19	0.99		0.60	0.74		0.24	0.99		1.00	0.76	
Control Delay	19.1	68.4		34.9	36.4		15.7	49.0		79.6	40.7	
Queue Delay	0.0	0.0		0.0	0.0		0.0	1.8		0.0	0.0	
Total Delay	19.1	68.4		34.9	36.4		15.7	50.8		79.6	40.7	
LOS	B	E		C	D		B	D		E	D	
Approach Delay		65.0			36.1			48.9			54.4	
Approach LOS		E			D			D			D	
Queue Length 50th (ft)	17	~433		38	280		15	320		114	286	
Queue Length 95th (ft)	39	#645		#84	#449		m26	#308		#275	#445	
Internal Link Dist (ft)		68			416			357			575	
Turn Bay Length (ft)				175			100			250		
Base Capacity (vph)	244	626		166	663		232	1023		255	615	
Starvation Cap Reductn	0	0		0	0		0	8		0	0	
Spillback Cap Reductn	0	0		0	0		0	0		0	0	
Storage Cap Reductn	0	0		0	0		0	0		0	0	
Reduced v/c Ratio	0.19	0.99		0.60	0.74		0.24	1.00		1.00	0.76	

## Intersection Summary

Lane Group	ø9
Lane Configurations	
Volume (vph)	
Ideal Flow (vphpl)	
Storage Length (ft)	
Storage Lanes	
Taper Length (ft)	
Right Turn on Red	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Heavy Vehicles (%)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Turn Type	
Protected Phases	9
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	4.0
Minimum Split (s)	6.0
Total Split (s)	6.0
Total Split (%)	6%
Yellow Time (s)	2.0
All-Red Time (s)	0.0
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Recall Mode	Max
Act Effct Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	
Queue Length 95th (ft)	
Internal Link Dist (ft)	
Turn Bay Length (ft)	
Base Capacity (vph)	
Starvation Cap Reductn	
Spillback Cap Reductn	
Storage Cap Reductn	
Reduced v/c Ratio	
<b>Intersection Summary</b>	

## Timings

30: S Union St &amp; East Ave

1/7/2014

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 99 (99%), Referenced to phase 2:NBT and 6:SBTL, Start of Green

Natural Cycle: 105

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 1.00

Intersection Signal Delay: 51.3

Intersection LOS: D

Intersection Capacity Utilization 88.2%

ICU Level of Service E

Analysis Period (min) 15

~ Volume exceeds capacity, queue is theoretically infinite.


Queue shown is maximum after two cycles.

# 95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 30: S Union St &amp; East Ave

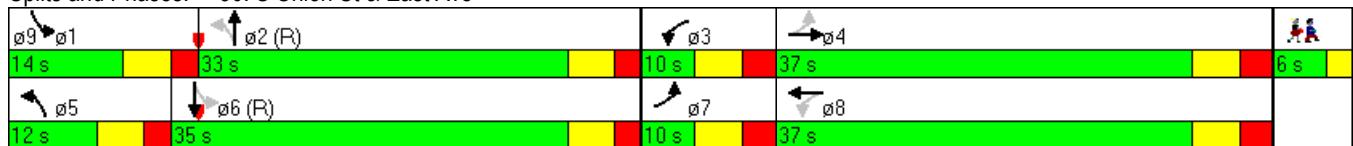



## Timings

30: S Union St &amp; East Ave

1/7/2014

Lane Group	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations												
Volume (vph)	42	470	88	90	367	72	50	668	245	229	392	31
Ideal Flow (vphpl)	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
Storage Length (ft)	0		0	175		0	100		0	250		0
Storage Lanes	0		0	0		0	1		0	1		0
Taper Length (ft)	75			75			75			75		
Right Turn on Red			No			Yes			Yes			No
Link Speed (mph)		30			30			30			30	
Link Distance (ft)		148			337			437			655	
Travel Time (s)		3.4			7.7			9.9			14.9	
Peak Hour Factor	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90
Heavy Vehicles (%)	2%	2%	2%	3%	3%	3%	2%	2%	2%	2%	2%	2%
Shared Lane Traffic (%)												
Lane Group Flow (vph)	0	667	0	0	588	0	56	1014	0	254	470	0
Turn Type	Perm	NA		Perm	NA		pm+pt	NA		pm+pt	NA	
Protected Phases		4			8		5	2		1	6	
Permitted Phases	4			8			2			6		
Detector Phase	4	4		8	8		5	2		1	6	
Switch Phase												
Minimum Initial (s)	20.0	20.0		20.0	20.0		6.0	20.0		6.0	20.0	
Minimum Split (s)	28.0	28.0		28.0	28.0		11.5	25.5		11.5	25.5	
Total Split (s)	37.0	37.0		37.0	37.0		12.0	38.0		19.0	45.0	
Total Split (%)	37.0%	37.0%		37.0%	37.0%		12.0%	38.0%		19.0%	45.0%	
Yellow Time (s)	3.5	3.5		3.5	3.5		3.5	3.5		3.5	3.5	
All-Red Time (s)	2.5	2.5		2.5	2.5		2.0	2.0		2.0	2.0	
Lost Time Adjust (s)		-1.5			-1.5		-1.5	-1.5		-1.5	-1.5	
Total Lost Time (s)		4.5			4.5		4.0	4.0		4.0	4.0	
Lead/Lag							Lead	Lag		Lead	Lag	
Lead-Lag Optimize?							Yes	Yes		Yes	Yes	
Recall Mode	Min	Min		Min	Min		None	C-Max		None	C-Max	
Act Effct Green (s)	30.9			30.9			42.8	34.9		53.0	43.4	
Actuated g/C Ratio	0.31			0.31			0.43	0.35		0.53	0.43	
v/c Ratio	0.77			0.91			0.15	0.83		0.78	0.59	
Control Delay	38.0			51.3			10.2	27.2		37.2	27.0	
Queue Delay	0.0			0.0			0.0	1.4		0.0	0.1	
Total Delay	38.0			51.3			10.2	28.6		37.2	27.1	
LOS	D			D			B	C		D	C	
Approach Delay	38.0			51.3				27.6			30.6	
Approach LOS	D			D				C			C	
Queue Length 50th (ft)	196			178			12	293		108	249	
Queue Length 95th (ft)	265			#280			m21	#366		#220	358	
Internal Link Dist (ft)	68			257				357			575	
Turn Bay Length (ft)							100			250		
Base Capacity (vph)	907			680			379	1223		338	800	
Starvation Cap Reductn	0			0			0	81		0	0	
Spillback Cap Reductn	0			0			0	0		0	29	
Storage Cap Reductn	0			0			0	0		0	0	
Reduced v/c Ratio	0.74			0.86			0.15	0.89		0.75	0.61	

## Intersection Summary

Lane Group	ø9
Lane Configurations	
Volume (vph)	
Ideal Flow (vphpl)	
Storage Length (ft)	
Storage Lanes	
Taper Length (ft)	
Right Turn on Red	
Link Speed (mph)	
Link Distance (ft)	
Travel Time (s)	
Peak Hour Factor	
Heavy Vehicles (%)	
Shared Lane Traffic (%)	
Lane Group Flow (vph)	
Turn Type	
Protected Phases	9
Permitted Phases	
Detector Phase	
Switch Phase	
Minimum Initial (s)	4.0
Minimum Split (s)	6.0
Total Split (s)	6.0
Total Split (%)	6%
Yellow Time (s)	2.0
All-Red Time (s)	0.0
Lost Time Adjust (s)	
Total Lost Time (s)	
Lead/Lag	
Lead-Lag Optimize?	
Recall Mode	Max
Act Effct Green (s)	
Actuated g/C Ratio	
v/c Ratio	
Control Delay	
Queue Delay	
Total Delay	
LOS	
Approach Delay	
Approach LOS	
Queue Length 50th (ft)	
Queue Length 95th (ft)	
Internal Link Dist (ft)	
Turn Bay Length (ft)	
Base Capacity (vph)	
Starvation Cap Reductn	
Spillback Cap Reductn	
Storage Cap Reductn	
Reduced v/c Ratio	
<b>Intersection Summary</b>	

## Timings

30: S Union St &amp; East Ave

1/7/2014

Area Type: Other

Cycle Length: 100

Actuated Cycle Length: 100

Offset: 0 (0%), Referenced to phase 2:NBT and 6:SBTL, Start of Green, Master Intersection

Natural Cycle: 75

Control Type: Actuated-Coordinated

Maximum v/c Ratio: 0.91

Intersection Signal Delay: 35.2

Intersection LOS: D

Intersection Capacity Utilization 86.8%

ICU Level of Service E


Analysis Period (min) 15

# 95th percentile volume exceeds capacity, queue may be longer.

Queue shown is maximum after two cycles.

m Volume for 95th percentile queue is metered by upstream signal.

Splits and Phases: 30: S Union St &amp; East Ave

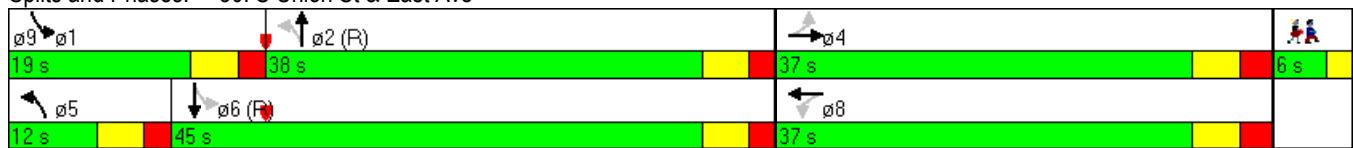

## **Appendix G – Traffic Analysis Contents**

**2035 Alternative Development Memo  
(attached cd w/Synchro files)**

---

To: Jim Hofmann Jr  
Rochester NY Office  
File Name

From: Paula F. Benway, FITE  
Rochester NY Office

Date: December 18, 2013

---

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

This serves to document and evaluate the traffic capacity needs at each of the intersections within the Inner Loop East corridor. The purpose of this analysis is to evaluate all of the ideas and suggestions received from the various stakeholders along with options developed by the design team to address capacity, geometric, and pedestrian/bicycle needs at each location. The intent is to pick the best intersection treatment that addresses the various needs which will form the ultimate proposed corridor alternative.

The following sections cover an overview on the traffic volumes followed by location specific option evaluation.

## Traffic Volumes

The analysis was completed using the projected 2035 Future Traffic Volumes for the weekday morning and evening peak hours (attached). Some options required some redistribution of traffic, and hence, the individual volumes may not be exactly as depicted in the attached traffic volume diagrams. For example, at the corridor north terminus location, several options were evaluated for the Inner Loop ramp locations (Charlotte Street vs. Richmond Street) that altered one-way versus two-traffic patterns in the immediate area.

The traffic volumes being used as part of the analysis originated from the Project Scoping Report (PSR) where growth rates and extent of redistribution of traffic was assessed and recorded. The 2035 future "no-build" traffic volumes are the basis of the analysis and have been applied to the new at-grade urban city street environment. Since the PSR report was done some time back and development has occurred within the immediate project area, updated traffic counts were performed at a few key intersections to evaluate what has changed since the original 2008 traffic volumes were taken. While national trends indicate that traffic volumes have leveled off or even decreased over the past 10 years throughout the nation, traditional forecasting substantially overestimates the potential for traffic growth. Recent studies have revealed that traffic on roads in urban settings (arterials and collectors) was typically overestimated by a significant amount<sup>1</sup>. Traffic counts recently taken (September 2013) at Broad Street and at the East Avenue intersection with Union Street and Pitkin Street indicate that traffic volumes have remained at the same levels as those recorded in 2008 at the start of the PSR project. A volume comparison table is attached. Traffic volumes at the Broad Street intersections have actually decreased by 2-5% per year since 2008; that is significant. When the 2013 volumes are compared to the projected 2014 ETC volumes (one year difference), the 2013 volumes are 10%-30% lower. Bottom line, should traffic levels remain at current levels, the projected 2035 volumes may be high.

---

<sup>1</sup> Pavithra Parthasarathi and David Levinson, "Post construction Evaluation of Traffic Forecast Accuracy" Transport Policy, 2010.

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

Traffic counts were obtained at the intersections of Broad Street and at the East Avenue intersections with Pitkin Street and Union Street during the weekday morning and evening peak. The following table summarizes a comparison to previously collected (base counts) taken in 2008 and to the projected 2014 Estimated Time of Completion volumes being used in this study.

Comparison to 2008 Traffic					Comparison to 2014 ETC Projections			
Intersection	2008 Intersection Volume	2013 Intersection Volume	Volume Change	% / Year	2013 Intersection Volume	2014 ETC Projections	Volume Change	%
<b>East Ave @ Union St</b>								
Morning PH	991	985	-6	0%	985	1090	-105	-10%
Evening PH	1255	1332	77	1%	1332	1430	-98	-7%
<b>East Ave @ Pitkin St</b>								
Morning PH	963	1011	48	1%	1011	1078	-67	-6%
Evening PH	1084	1077	-7	0%	1077	1228	-151	-12%
<b>Broad St @ Union St</b>								
Morning PH	338	290	-48	-3%	290	360	-70	-19%
Evening PH	394	399	5	0%	399	476	-77	-16%
<b>Broad St @ Pitkin St</b>								
Morning PH	528	385	-143	-5%	385	572	-187	-33%
Evening PH	618	559	-59	-2%	559	710	-151	-21%
Roadway	2008 Volume	2013 Volume	Total Change	% / Year	2013 Volume	2014 ETC Projections	Volume Change	%
<b>Union Street (Between Broad and East)</b>								
Morning PH	215	215	0	0%	215	224	-9	-4%
Evening PH	340	344	4	0%	344	420	-76	-18%
<b>Pitkin St (Between Broad and East)</b>								
Morning PH	306	250	-56	-4%	250	336	-86	-26%
Evening PH	249	252	3	0%	252	263	-11	-4%

Urban traffic networks and grid systems are flexible and resilient due to their inherent connectivity. Street design should be from a network perspective and consider turn restrictions as well as the overall distribution of congestion throughout the network. Hence, while traffic projections maybe high and will be used per standard procedures, due care is warranted in determining geometric and traffic control features identified to assure that the corridor and intersections are not overdesigned.

The following presents numerous options and sub options evaluated at each corridor intersection.

December 18, 2013

Jim Hofmann Jr

Page 3 of 26

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

## Monroe Avenue/Chestnut Street Intersection

Numerous intersection alternatives were considered and evaluated at this intersection and includes traditional signalized intersection, off-set T-intersections and a roundabout. Several variations for each alternative are documented below.

**Alternative 1:** Traditional signalized intersection as documented in preliminary conceptual layout. This alternative provides 3-lanes on the east/west approaches, with slight modifications to the north/south approaches. Acceptable levels of service (LOS D or better) and low v/c ratios would be experienced with this alternative, and queuing would not be a concern. This alternative provides excess vehicular capacity and is not recommended.



While good operations would be achieved, this alternative has the following constraints:

- Pedestrian and bicycle access can be accommodated, but it is a relatively large intersection for pedestrian crossings.
- SB left turns from Chestnut Street onto the Inner Loop will be restricted due to geometric constraints. Alternative access via Woodbury Blvd or S. Union will be available for this minor movement.

Intersection	Lane Group	AM Peak Hour					PM Peak Hour				
		V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
Inner Loop/Howell Street & Chestnut Street/Monroe Avenue Signalized	EB-L (1)	0.47	17.5	B	83	151	0.42	26.5	C	41	77
	EB-T (1)	0.39	21.7	C	114	253	0.47	31.8	C	135	256
	EB-R (1)	0.22	4.4	A	0	46	0.14	0.5	A	0	0
	WB-L (1)	0.05	5.6	A	3	6	0.07	11.1	B	6	11
	WB-TR (2)	0.32	13.3	B	70	97	0.71	27.9	C	227	271
	NB-L (1)	0.62	29.9	C	77	116	0.89	53.7	D	121	269
	NB-TR (1)	0.65	29.5	C	238	311	0.38	15.2	B	131	196
	SB-T (1)	0.73	44.8	D	185	258	0.93	53.7	D	357	565
	SB-R (1)	0.20	0.3	A	0	0	0.85	6.6	A	0	0
	Intersection	-	20.9	C	-	-	-	24.5	C	-	-

**Alternative 1A:** Traditional signalized intersection with reduced geometry on the EB approach consisting of an EB Left Turn lane and a Through-Right lane on the Inner Loop. This alternative provides LOS D or better, low v/c ratios, and queuing that does not affect adjacent intersections. This alternative reduces the number of lanes for pedestrians to cross from Monroe Avenue to Chestnut Street. SB left turns from Chestnut Street onto Howell Street will be prohibited due to geometric constraints.



December 18, 2013

Jim Hofmann Jr

Page 4 of 26

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**


ALTERNATIVE 1A: SIGNALIZED INTERSECTION - EB APPROACH: EB-L, EB-TR											
Intersection	Lane Group	AM Peak Hour					PM Peak Hour				
		V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
Inner Loop/Howell Street & Chestnut Street/Monroe Avenue Signalized	EB-L (1)	0.45	15.8	B	78	141	0.42	26.5	C	41	77
	EB-TR (1)	0.59	23.5	C	182	434	0.63	35.1	D	181	379
	WB-L (1)	0.06	5.1	A	3	6	0.08	11.3	B	6	11
	WB-TR (2)	0.29	12.3	B	69	94	0.71	27.9	C	227	271
	NB-L (1)	0.70	38.0	D	80	124	0.89	53.7	D	121	269
	NB-TR (1)	0.69	32.6	C	247	330	0.38	15.2	B	131	196
	SB-T (1)	0.73	45.6	D	185	262	0.93	53.7	D	357	565
	SB-R (1)	0.20	0.3	A	0	0	0.85	6.6	A	0	0
	Intersection	-	23.6	C	-	-	-	25.6	C	-	-

Source: Synchro 8/SimTraffic

**Alternative 1B:** Traditional signalized intersection with continued reduction in width including Alternative 1A geometry plus only one WB LTR travel lane on the Inner Loop. Reduction of WB lanes to one will force WB, NB Monroe Avenue and SB Chestnut approaches to operate at LOS F during the PM peak hour. These levels are not borderline failures, queuing is estimated on the WB Inner Loop approach to range from 600-800 feet which would affect operations at the Howell Street and S. Union Street intersection. This option is not recommended based on the capacity results.

ALTERNATIVE 1B: SIGNALIZED INTERSECTION - WB APPROACH: WB-LTR											
Intersection	Lane Group	AM Peak Hour					PM Peak Hour				
		V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
Inner Loop/Howell Street & Chestnut Street/Monroe Avenue Signalized	EB-L (1)	0.51	16.9	B	78	141	0.42	22.0	C	36	68
	EB-TR (1)	0.54	17.1	B	182	311	0.47	20.9	C	157	239
	WB-LTR (1)	0.62	22.0	C	224	328	1.16	118.0	F	595	817
	NB-L (1)	0.70	38.0	D	80	124	1.07	100.0	F	145	308
	NB-TR (1)	0.69	32.6	C	247	330	0.43	19.8	B	153	230
	SB-T (1)	0.73	45.6	D	185	262	1.02	77.2	F	391	614
	SB-R (1)	0.20	0.3	A	0	0	0.85	6.6	A	0	0
	Intersection	-	24.0	C	-	-	-	48.8	D	-	-

**Alternative 2:** Traditional signalized off-set intersections with reduced east/west travel lanes on the Inner Loop. This alternative was developed to improve pedestrian crossings by separating and creating two off-set T-intersections. The capacity analysis indicates that the five lane section through both intersections would cause failing conditions during the weekday evening peak hour for critical movements at both T-intersections. The failing conditions are not borderline, significant delays and queuing would be experienced for Chestnut Street SB and Monroe Ave NB approaches.

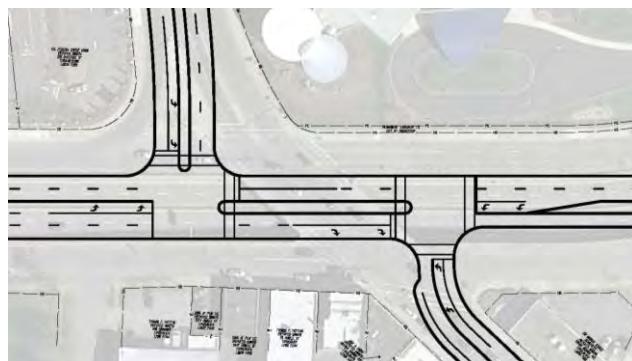

December 18, 2013

Jim Hofmann Jr

Page 5 of 26

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

**ALTERNATIVE 2: OFFSET INTERSECTIONS**

Intersection	Lane Group	AM Peak Hour					PM Peak Hour				
		V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
Inner Loop/Howell Street & Chestnut Street Signalized	EB-L (1)	0.83	48.0	D	102	214	0.26	21.5	C	40	74
	EB-T (2)	0.81	47.0	D	145	222	0.61	42.9	D	118	168
	WB-TR (2)	0.58	4.6	A	60	69	0.97	55.1	E	128	94
	SB-L (1)	0.82	50.5	D	183	320	1.25	159.9	F	522	738
	SB-R (1)	0.20	0.3	A	0	0	1.82	394.6	F	1134	1394
	Intersection	-	23.8	C	-	-	-	191.6	F	-	-
Inner Loop/Howell Street & Monroe Avenue Signalized	EB-T (1)	0.52	13.0	B	65	111	0.43	10.3	B	46	90
	EB-R (1)	0.51	3.2	A	0	4	0.60	10.7	B	103	12
	WB-L (1)	0.08	19.6	B	9	25	0.06	23.3	C	8	20
	WB-T (2)	0.59	37.9	D	100	146	1.13	111.0	F	262	384
	NB-LR (2)	0.74	37.0	D	173	235	1.08	111.0	F	240	354
	Intersection	-	23.7	C	-	-	-	67.0	E	-	-

Source: Synchro 8/SimTraffic

**Alternative 2A:** Traditional signalized off-set intersections with double left/right turn lanes on Monroe/Chestnut approaches. A free flow right turn lane for Chestnut Street SB approach is also included. This option was assessed in order to achieve improved intersection operations. This alternative would require a six lane section between the two off-set T-intersections and four travel lanes on Monroe Avenue. These geometric requirements would:

- Impact properties on the Monroe Avenue approach.
- Not improve or decrease the number of travel lanes for pedestrians to cross.



**ALTERNATIVE 2A: OFFSET INTERSECTIONS WITH DUAL TURN LANES**

Intersection	Lane Group	AM Peak Hour					PM Peak Hour				
		V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
Inner Loop/Howell Street & Chestnut Street Signalized	EB-L (1)	0.84	46.0	D	90	216	0.37	22.5	C	36	70
	EB-T (2)	0.60	33.3	C	132	184	0.45	31.4	C	98	142
	WB-TR (2)	0.49	2.6	A	56	51	0.72	5.8	A	47	74
	SB-L (2)	0.78	51.5	D	97	159	0.80	41.3	D	182	268
	SB-R (1)	0.20	0.3	A	0	0	0.85	6.7	A	0	0
	Intersection	-	20.0	B	-	-	-	15.2	B	-	-
Inner Loop/Howell Street & Monroe Avenue Signalized	EB-T (1)	0.58	8.9	A	20	62	0.41	5.4	A	21	44
	EB-R (2)	0.36	3.3	A	0	20	0.39	2.5	A	6	28
	WB-L (1)	0.07	15.7	B	8	22	0.07	18.1	B	8	24
	WB-T (2)	0.43	30.3	C	91	133	0.83	42.8	D	201	296
	NB-LR (2)	0.56	30.9	C	162	220	0.76	38.2	D	178	242
	Intersection	-	19.3	B	-	-	-	24.5	C	-	-

Source: Synchro 8/SimTraffic

**Alternative 3:** Single Lane Roundabout – an oval roundabout to optimize the approach entries is shown to the right. Capacity analysis indicates a single lane roundabout would not provide

Design with community in mind

December 18, 2013

Jim Hofmann Jr

Page 6 of 26

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

acceptable levels of service. Most approaches to the roundabout would operate at over capacity conditions with significant queuing in all directions. This alternative has the following constraints:

- Geometric footprint is large and the Monroe Avenue approach to the roundabout may not fit within the ROW.
- The distance travelled by a pedestrian would notably increase.
- Access to adjacent businesses would not be permitted within the RDB proper.
- Alternative access options to the parcels on the southwest corner would be required.



Intersection	Lane Group	AM Peak Hour				PM Peak Hour			
		Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
Inner Loop/Howell Street & Chestnut St/Monroe Ave Roundabout	EB-L	58.4	F	431	1208	89.9	F	1020	1275
	EB-T	62.2	F	431	1208	75.8	F	1020	1275
	EB-R	55.4	F	431	1208	68.8	F	1020	1275
	WB-L	90.0	F	917	1173	127.9	F	1408	1655
	WB-T	89.3	F	917	1173	88.8	F	1408	1655
	WB-R	85.0	F	917	1173	60.9	F	1408	1655
	NB-L	60.2	F	261	530	28.6	D	401	515
	NB-T	57.2	F	261	530	31.4	D	401	515
	NB-R	56.6	F	261	530	69.9	F	401	515
	SB-L	56.5	F	151	683	232.0	F	1047	1104
	SB-T	46.9	E	151	683	264.6	F	1047	1104
	SB-R	0.0	A	0	0	0.0	A	0	0
<b>Intersection</b>		20.6	C	-	-	23.8	C	-	-

Source: VISSIM 5.4

**Alternative 3A:** Dual Lane Roundabout - in order to address the capacity deficiencies identified in Alternative 3, a dual lane roundabout was assessed that may include two entry lanes on the WB Inner Loop approach and on the SB Chestnut Street approach along with a SB bypass lane for right turning vehicles. The capacity analysis indicates that a significant reduction in delay would be achieved. However, some queuing would still be anticipated, especially on the Monroe Avenue NB approach. While good operations would be achieved, this alternative has the following constraints:



December 18, 2013

Jim Hofmann Jr

Page 7 of 26

#### Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis

- Geometric footprint is large and the Monroe Avenue approach to the roundabout may not fit within the ROW.
- Pedestrian access would be a challenge.
- Access to adjacent businesses would not be permitted within the RDB proper. Alternative access options to the parcels on the southwest corner would be required.

Intersection	Lane Group	AM Peak Hour				PM Peak Hour			
		Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
Inner Loop/Howell Street & Chestnut St/Monroe Ave Roundabout	EB-L	5.8	A	1	98	6.0	A	2	120
	EB-T	4.6	A	1	98	5.0	A	2	120
	EB-R	3.7	A	1	98	4.5	A	2	120
	WB-L	17.6	C	10	169	16.4	C	31	340
	WB-T	14.4	B	10	169	15.0	B	31	340
	WB-R	17.4	C	10	169	17.3	C	31	340
	NB-L	39.2	E	132	513	18.2	C	38	420
	NB-T	39.2	E	132	513	18.2	C	38	420
	NB-R	36.6	E	132	513	14.1	B	38	420
	SB-L	8.1	A	2	82	41.9	E	61	372
	SB-T	6.7	A	2	82	30.4	D	61	372
	SB-R	0.0	A	0	0	0.0	A	0	0
<b>Intersection</b>		15.2	C	-	-	13.5	B	-	-

Source: VISSIM 5.4

#### Alternative 4A: Signalized Intersection with U-Turn

**west of Broadway:** This option is a variation from the traditional four-way intersection, Alternative 1A. This option eliminates westbound left turns from the Howell Street approach at the intersection proper, has no southbound left turn lane on Chestnut Street. The U-turn just west of the intersection allows for the turn restrictions and improved access to Broadway and the adjacent residential neighborhood.

This option works well with a minimal amount of lanes, similar to Alternative 1A. However, a deceleration lane along westbound Inner Loop leading to the U-turn would be necessary to prevent rear-end accidents at the U-turn location. Geometric constraints with the eastbound Inner Loop ramp lanes were identified along with the concern that eastbound right turning traffic will act as free flow conditions and will impact pedestrian crossings. There is no net benefit of this option over Alternative 1A.



December 18, 2013

Jim Hofmann Jr

Page 8 of 26

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

ALTERNATIVE 4A: SIGNALIZED INTERSECTION with U-TURN											
Intersection	Lane Group	AM Peak Hour					PM Peak Hour				
		V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
Inner Loop/Howell Street & Chestnut Street/Monroe Avenue Signalized	EB-L (1)	0.28	14.8	B	82	144	0.16	22.8	C	44	81
	EB-T (1)	0.41	16.9	B	118	203	0.52	29.3	C	150	232
	EB-R (1)*	0.26	11.2	B	-	26	0.20	12.8	B	-	19
	WB-L (1)*	0.04	11.2	B	-	3	0.03	10.1	B	-	3
	WB-TR (2)	0.34	29.8	C	73	123	0.81	46.9	D	198	355
	NB-L (1)	0.59	29.0	C	77	119	0.87	49.6	D	125	271
	NB-TR (1)	0.66	30.2	C	238	324	0.38	14.1	B	129	193
	SB-T (1)	0.74	46.3	D	185	266	0.93	53.2	D	368	580
	SB-R (1)	0.20	0.3	A	0	0	0.88	8.3	A	0	8
	Intersection	-		A	-	-	-	28.7	C	-	-

\*Movements are unsignalized and offset from main intersection.

**Alt 4B - Signalized Intersection with U-Turn at Broadway:**

**Broadway:** This is a sub option of Alternative 4A to have the U-turn directly across from Broadway. This also works from a traffic standpoint and would produce similar capacity analysis results as alternative 4A. As stated in 4A, it should consider a deceleration lane along westbound Inner Loop leading to the U-turn. Geometric and pedestrian safety concerns would be similar to 4A and it would not produce any notable benefits over alternative 1A



**Alt 5 - Signalized Intersections at Existing Ramps:**

This option maintains the current ramps from the Inner Loop to Monroe Avenue and Chestnut Street. The area between the ramps would be filled in and converted to green space. This option works provided two SB thru lanes on Chestnut Street. This is needed to minimize green time for that movement and provide improved operations for the Monroe Avenue NB thru and left turns, as well as the Inner Loop ramp EB lefts. There is insufficient storage between the two intersections to hold the eastbound left-turn volume during the morning peak hour. Therefore, to phase the signal so that the northbound thru movement (at the intersection with WB Inner Loop) overlaps with the eastbound left-turn phase so that those left-turning vehicles can travel all the way through the intersection.



While operations can be refined to address the travel volumes, this option would require wider road widths, does not make the pedestrian crossing distances any shorter and eliminate potential development area east of Monroe/Chestnut St. The green space area would provide improved walking experience versus crossing on a bridge today.

December 18, 2013

Jim Hofmann Jr

Page 9 of 26

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

ALTERNATIVE 5: SIGNALIZED INTERSECTIONS at EXISTING RAMPS											
Intersection	Lane Group	AM Peak Hour					PM Peak Hour				
		V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
<b>Inner Loop/Howell Street EB &amp; Chestnut Street/Monroe Avenue Signalized</b>	EB-L (1)	0.35	22.0	C	104	144	0.15	20.8	C	41	76
	EB-T (1)	0.44	23.4	C	144	203	0.41	24.6	C	133	205
	EB-R (1)	0.25	3.8	A	0	26	0.13	4.1	A	0	26
	NB-TR (2)	0.37	16.4	B	127	40	0.35	14.4	B	120	159
	SB-T (2)	0.37	7.0	A	12	123	0.65	6.5	A	16	20
	Intersection	-	15.3	B	-	-	-	13.1	B	-	-
<b>Inner Loop/Howell Street WB &amp; Chestnut Street/Monroe Avenue Signalized</b>	WB-L (1)	0.07	46.8	D	15	30	0.06	40.9	D	15	30
	WB-TR (2)	0.50	48.3	D	113	170	0.81	54.4	D	242	308
	NB-L (1)	0.23	3.5	A	9	22	0.41	4.5	A	7	12
	NB-T (1)	0.55	5.7	A	72	383	0.39	2.9	A	17	34
	SB-T (2)	0.35	31.8	C	86	125	0.59	33.6	C	172	229
	SB-R (1)	0.20	0.3	A	0	0	0.85	6.6	A	0	0
Intersection		-	17.6	B	-	-	-	20.7	C	-	-

**Alt 6 - Inner Loop T at Monroe/Chestnut:** This option ends the Inner Loop ramps at Monroe Avenue as a T-Intersection. This option is similar to a concept provided in a prior charette plan. This option would force current traffic to find alternative ways to their destination within the project area. For example, traffic could divert north and use the Broad/Court Street connection to South Union corridor, or traffic could turn right and then left at the S. Union/Monroe Avenue intersection. For analysis purposes, it was assumed that traffic would split 50/50 at the T intersection. 50% of the vehicles traveling thru on Inner Loop/Howell Street would reroute via Broad Street, and the other 50% would utilize S Union to Monroe Ave. Analysis indicates that to accommodate the rerouted traffic, the following geometry would be necessary at the intersection: a double left-turn lane from Monroe to the westbound Inner Loop; a separate right-turn lane on southbound S. Union Street.



This option essentially offsets major thru movements. There is too much uncertainty when it comes to how vehicles would redistribute; if more vehicles redistribute to S Union Street, then more improvements may be needed at that location. Improvements would entail widening which would impact adjacent properties. This option may be made to work, however would shift traffic to other locations and would require additional improvements and widening to accommodate.

December 18, 2013

Jim Hofmann Jr

Page 10 of 26

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

ALTERNATIVE 6: INNER LOOP T INTERSECTION		AM Peak Hour					PM Peak Hour				
Intersection	Lane Group	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
	EB-L (1)	0.78	41.7	D	230	311	0.69	46.6	D	145	213
Inner Loop & Chestnut Street/Monroe Avenue Signalized	EB-R (1)	0.48	5.0	A	0	54	0.46	7.4	A	0	58
	NB-L (2)	0.64	45.8	D	99	147	0.79	41.1	D	170	281
	NB-T (1)	0.41	13.3	B	150	260	0.27	7.0	A	59	126
	SB-T (1)	0.42	26.1	C	147	246	0.73	31.3	C	326	515
	SB-R (1)	0.29	0.5	A	0	0	1.07	48.4	F	144	406
	Intersection	-	20.9	C	-	-	-	37.8	D	-	-
	WB-T (1)	0.55	14.4	B	163	251	0.50	13.6	B	186	270
Monroe Avenue & South Union Street Signalized	WB-R (1)	0.18	2.6	A	3	29	0.20	2.8	A	9	38
	NB-L (1)	0.16	17.9	B	31	63	0.19	24.8	C	47	88
	NB-T (1)	0.54	23.6	C	139	221	0.33	26.8	C	98	159
	NB-R (1)	0.04	6.8	A	0	16	0.07	7.8	A	0	23
	SB-L (1)	0.48	27.0	C	46	100	0.56	30.9	C	103	155
	SB-R (1)	0.22	4.1	A	0	35	0.45	3.9	A	28	37
	Intersection	-	15.6	B	-	-	-	12.3	B	-	-

**Alt 7 – Inner Loop/Howell Street Offset:** another option is to create off-set T-Intersections with Monroe Avenue/Chestnut as shown to the right. This option would require adding dual left-turn lanes northbound on Monroe Avenue, as well as dual right-turn lanes westbound on the Howell Street approach. As shown in the capacity analysis summary table, the NB left-turns on Monroe Avenue would operate at LOS F in the PM peak hour. The left-turn volume during the PM peak hour is approximately 900 vehicles. Therefore, a triple left would be required. It does not make sense to needlessly require what were simple through



December 18, 2013

Jim Hofmann Jr

Page 11 of 26

#### Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis

movements on EB/WB Inner Loop/Howell Street, to make multiple turning movements to complete the thru move.

#### ALTERNATIVE 7: INNER LOOP - HOWELL STREET OFFSET

Intersection	Lane Group	AM Peak Hour					PM Peak Hour				
		V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
Inner Loop EB & Chestnut Street/Monroe Avenue Signalized	EB-L (1)	0.48	32.1	C	126	201	0.25	33.8	C	52	98
	EB-R (1)	0.62	6.7	A	0	80	0.58	7.5	A	0	76
	NB-L (2)	0.48	20.9	C	107	142	0.94	96.4	F	301	434
	NB-T (1)	0.47	12.8	B	256	370	0.30	7.4	A	57	122
	SB-T (1)	0.61	39.1	D	174	266	0.93	54.8	D	363	577
	SB-R (1)	0.47	6.0	A	0	63	0.85	6.6	A	0	0
	Intersection	-	17.7	B	-	-	-	37.9	D	-	-
Howell Street WB & Chestnut Street/Monroe Avenue Signalized	WB-L (1)	0.05	24.0	C	7	15	0.03	16.9	B	5	16
	WB-R (2)	0.23	1.1	A	2	0	0.39	3.7	A	23	49
	NB-TR (2)	0.53	28.3	C	170	225	0.65	35.2	D	190	252
	SB-T (1)	0.54	16.3	B	145	187	0.70	33.7	C	90	142
	SB-R (1)	0.42	19.0	B	236	311	0.74	12.1	B	96	144
	Intersection	-	18.3	B	-	-	-	18.7	B	-	-

#### Inner Loop/Howell/S. Union Street Intersection

Four intersection alternatives were considered and evaluated at this intersection. These include a traditional T-intersection and a roundabout. Variations for each alternative were evaluated.

**Alternative 1:** Traditional T-intersection with the Inner Loop/Howell Street terminating and forming a T-intersection with S. Union Street. A three lane section would be necessary on S. Union Street. A southbound right turn lane and a northbound left turn lane on Union would be necessary. Capacity analysis indicates the overall intersection would operate at acceptable levels of service as a "stop" sign controlled intersection, with the exception of the Howell Street approach, which would experience delays considered border line "failing" (51.3 sec) during the evening peak hour. A traffic signal could be considered at this location when and if traffic volumes and delays materialize. A traffic signal would provide acceptable levels of service on all three approaches.



#### ALTERNATIVE 1: HOWELL STREET "T" AT UNION STREET

Intersection	Lane Group	AM Peak Hour					PM Peak Hour				
		V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
Howell Street & S Union Street Unsignalized	EB-LR (1)	0.81	41.1	E	-	181	0.89	51.3	F	-	236
	NB-LT (1)	0.01	0.2	A	-	0	0.01	0.2	A	-	1
	SB-T (1)	0.06	0.0	A	-	0	0.10	0.0	A	-	0
	SB-R (1)	0.22	0.0	A	-	0	0.38	0.0	A	-	0
	Intersection	-	9.8	A	-	-	-	6.1	A	-	-

w/c ratio = volume/capacity ratio  
Source: Synchro 8/SimTraffic

December 18, 2013

Jim Hofmann Jr

Page 12 of 26

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

**Alternative 2:** Traditional 4-way intersection of Howell Street terminating at S. Union Street opposite LaFayette Street. As a four-way intersection, traffic signal control would be necessary. One travel lane in all four approaches to serve shared access by lefts, troughs and right turning vehicles would be sufficient. This geometry will also maintain a tight intersection allowing for improved pedestrian crossing. The capacity analysis indicates acceptable levels (LOS D or better) with low v/c ratios and moderate queuing.



**ALTERNATIVE 2: FOUR-LEG INTERSECTION AT LAFAYETTE STREET**

Intersection	Lane Group	AM Peak Hour					PM Peak Hour				
		V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
Howell Street/Lafayette Street & S Union Street Signalized	EB-LTR (1)	0.76	34.5	C	145	211	0.85	42.6	D	167	315
	WB-LTR (1)	0.01	12.8	B	1	8	0.01	14.2	B	1	9
	NB-LTR (1)	0.58	21.3	C	250	217	0.48	14.0	B	192	301
	SB-LTR (1)	0.46	6.0	A	41	125	0.76	14.1	B	181	352
	Intersection	-	19.1	B	-	-	-	20.6	C	-	-

v/c ratio = volume/capacity ratio

Source: Synchro 8/SimTraffic

A sub option was considered with this four-way alignment to provide stop sign control on all four approaches. This option would require additional travel lanes on the Howell Street approach and the S. Union Street southbound approach would need to be widened to provide a free-flow right turn lane. Hence, an all-way stop sign control intersection would not work without additional widening.

**Alternative 3:** Traditional T-intersection with the Inner Loop/Howell Street proceeding in a north/south direction with the S. Union Street segment from Monroe Avenue terminating at a T-intersection with the Inner Loop. A three lane section on the Inner Loop/new Union Street would be necessary. The S. Union stub would be controlled by a stop sign. Capacity analysis indicates acceptable levels of operation (LOS D or better). Little to no delay would be experienced by all movements.

This alternative would continue the free flow traffic operations that would promote higher travel speeds. This alternative does not provide a definitive terminus of the Inner Loop.



December 18, 2013

Jim Hofmann Jr

Page 13 of 26

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

ALTERNATIVE 3: UNION STREET "T" AT HOWELL STREET		LANE GROUP	AM Peak Hour					PM Peak Hour				
Intersection			V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
Howell Street & S Union Street Unsignalized	WB-LR (1)	0.79	24.9	C	-	199	0.66	19.5	C	-	126	
	NB-TR (1)	0.20	0.0	A	-	0	0.22	0.0	A	-	0	
	SB-L (1)	0.08	8.2	A	-	7	0.14	8.5	A	-	12	
	SB-T (1)	0.22	0.0	A	-	0	0.37	0.0	A	-	0	
	Intersection	-	11.1	B	-	-	-	6.4	A	-	-	

V/c ratio = volume/capacity ratio

Source: Synchro 8/SimTraffic

**Alternative 2:** Single Lane Roundabout – a single lane roundabout would have the Inner Loop approach T-into S. Union Street. Preliminary analysis indicates a roundabout would operate and provide good levels of service.

### Broad Street/Union Street Intersection

Two major intersection alternatives were considered and evaluated at this intersection. These include a traditional T-intersection and a roundabout. Variations for each alternative were evaluated.

**Alternative 1:** Traditional signalized T-intersection – Broad Street would have two approach lanes and Union Street would have a three lane section. The capacity analysis indicates acceptable levels of service (LOS D or better) would be experienced. Queuing is not anticipated to affect major intersections, but may block side streets and alleys.



ALTERNATIVE 1: SIGNALIZED		LANE GROUP	AM Peak Hour					PM Peak Hour				
Intersection			V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
S Union St & E Broad St Signalized	EB-L (1)	0.40	45.0	D	54	99	0.77	47.4	D	198	271	
	EB-R (1)	0.17	13.7	B	0	29	0.35	6.2	A	0	43	
	NB-L (1)	0.34	3.7	A	14	29	0.19	5.6	A	11	22	
	NB-T (1)	0.48	4.2	A	117	209	0.63	11.2	B	347	490	
	SB-TR (1)	0.57	9.2	A	152	193	0.65	13.6	B	143	174	
	Intersection	-	8.5	A	-	-	-	17.3	B	-	-	

V/c ratio = volume/capacity ratio

Source: Synchro 8/SimTraffic

**Alternative 2:** Single Lane Roundabout – a single lane roundabout would operate and provide good levels of service, if in isolation. However, if a roundabout is considered at the East Avenue intersection, failing levels of service would be experienced, due to the proximity of the two intersections.



Design with community in mind

December 18, 2013

Jim Hofmann Jr

Page 14 of 26

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

ALTERNATIVE 2: SINGLE LANE ROUNDABOUT WITH SINGLE LANE ROUNDABOUTS ALONG CORRIDOR*								
Intersection	MOVEMENT	AM Peak Hour				PM Peak Hour		
		Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	Delay	Level of Service	50th Queue (ft)
<b>S Union St &amp; E Broad St Roundabout</b>	EB-L	22.7	C	9	111	126.9	F	241
	EB-R	4.6	A	9	111	90.6	F	241
	NB-L	85.5	F	1317	1667	320.6	F	1521
	NB-T	87.9	F	1317	1667	308.9	F	1521
	SB-T	5.9	A	46	650	15.6	C	438
	SB-R	6.9	A	46	650	5.5	A	438
	Intersection	46.8	E	-	-	131.8	F	-

Source: VISSIM 5.4

\*Failing movements are due to queue spillback from East Avenue intersection.

If a dual lane roundabout is considered at East Avenue, the Broad Street dual lane roundabout would show improved operations, see table below. All movements would operate at LOS D or better, except the Broad Street left turn movement which would experience LOS F during the evening peak hour. However, it should be noted that the failing condition is borderline levels with high volumes projected out to 2035.

ALTERNATIVE 2A: SINGLE LANE ROUNDABOUT WITH DUAL LANE ROUNDABOUTS AT EAST AVE AND MONROE AVE								
Intersection	MOVEMENT	AM Peak Hour				PM Peak Hour		
		Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	Delay	Level of Service	50th Queue (ft)
<b>S Union St &amp; E Broad St Roundabout</b>	EB-L	4.5	A	1	50	52.4	F	104
	EB-R	4.7	A	1	50	39.4	E	104
	NB-L	4.7	A	1	53	30.4	D	87
	NB-T	3.3	A	1	53	31.3	D	87
	SB-T	7.8	A	7	267	6.5	A	2
	SB-R	7.9	A	7	267	4.5	A	2
	Intersection	5.4	A	-	-	27.3	D	-

Source: VISSIM 5.4

## East Avenue/Union Street Intersection

Two major intersection alternatives were considered and evaluated at the East Avenue intersection. These include a traditional signalized intersection and a roundabout. Variations for each alternative were evaluated.

**Alternative 1:** Traditional signalized intersection – East Avenue would continue to operate as it does today with a three lane section; this would be restriped to include dedicated left turn lanes and one through lane in each direction. The capacity analysis indicates acceptable overall levels of service would be experienced with failing movements on the Union Street NB approach. Queuing is shown to be long on both approaches. The Union NB



Design with community in mind

December 18, 2013

Jim Hofmann Jr

Page 15 of 26

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

approach queue of 300-435 feet would exceed available storage and interfere with the Broad Street intersection.

ALTERNATIVE 1: DEDICATED LEFT-TURN LANES (3-LANES ON EAST AVE)											
Intersection	Lane Group	AM Peak Hour					PM Peak Hour				
		V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
<b>S Union St &amp; East Ave Signalized</b>	EB-L (1)	0.09	16.1	B	10	25	0.14	14.0	B	14	49
	EB-TR (1)	0.48	32.2	C	116	181	0.96	59.7	E	333	556
	WB-L (1)	0.42	33.8	C	89	146	0.39	18.1	B	31	59
	WB-TR (1)	0.73	44.2	D	277	376	0.74	34.5	C	252	424
	NB-L (1)	0.39	26.2	C	66	116	0.20	16.7	B	18	40
	NB-TR (2)	0.53	38.2	D	204	257	1.00	59.5	F	294	435
	SB-L (1)	0.55	22.3	C	88	137	0.88	52.6	D	94	245
	SB-TR (1)	0.71	38.6	D	287	431	0.77	39.8	D	254	436
	Intersection	-	36.1	D	-	-	-	49.0	D	-	-

V/C ratio = volume/capacity ratio

Source: Synchro 8/SimTraffic

An option to be considered would be to maintain the 3-lane section on East Avenue as it is working today and adjust the intersection operations in future years as development occurs in the area.



**Alternative 1A:** Traditional signalized intersection – East Avenue would continue to operate as it does today, but with a four lane section. The four lane section is primarily needed during the weekday evening peak hour. A four lane pavement section is currently on East Avenue, with the outer lanes used for on-street parking. Restricting parking on the south side of East Avenue between Union and Alexander could be considered during the evening peak hour. Intersection markings and signing would need to be further evaluated. The capacity analysis does indicate improved intersection operations and reduced queues that maybe less likely to overflow into other intersections.

ALTERNATIVE 1A: FOUR-LANES ON EAST AVENUE											
Intersection	Lane Group	AM Peak Hour					PM Peak Hour				
		V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
<b>S Union St &amp; East Ave Signalized</b>	EB-LTR (2)	0.31	24.3	C	61	90	0.70	33.6	C	180	228
	WB-LTR (2)	0.81	28.1	C	207	221	0.86	30.7	C	77	139
	NB-L (1)	0.29	8.7	A	19	32	0.12	8.2	A	13	19
	NB-TR (2)	0.44	19.0	B	170	238	0.72	24.1	C	136	193
	SB-L (1)	0.44	11.4	B	44	81	0.70	22.9	C	51	149
	SB-TR (1)	0.57	21.5	C	229	355	0.53	21.1	C	228	359
	Intersection	-	21.4	C	-	-	-	26.5	C	-	-

V/C ratio = volume/capacity ratio

Source: Synchro 8/SimTraffic

**Alternative 2:** Single Lane Roundabout – a single lane roundabout at the East Avenue intersection was considered. The capacity analysis indicates this intersection treatment would not provide the needed capacity for the projected volumes at this location. Failing levels would be experienced on

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

most approaches with extensive queuing in all directions. This queuing would affect operations on all nearby intersections, potentially causing gridlock conditions.

Intersection	Lane Group	AM Peak Hour				PM Peak Hour			
		Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
<b>S Union St &amp; East Ave Roundabout</b>	EB-L	41.1	E	85	474	134.9	F	455	496
	EB-T	45.5	E	85	474	131.5	F	455	496
	EB-R	41.7	E	85	474	122.6	F	455	496
	WB-L	113.7	F	667	829	41.9	E	551	801
	WB-T	113.0	F	667	829	39.0	E	551	801
	WB-R	112.9	F	667	829	38.0	E	551	801
	NB-L	47.0	E	292	615	70.2	F	706	840
	NB-T	44.8	E	292	615	62.2	F	706	840
	NB-R	44.3	E	292	615	62.9	F	706	840
	SB-L	63.8	F	462	781	58.0	F	622	806
	SB-T	63.7	F	462	781	61.5	F	622	806
	SB-R	58.6	F	462	781	56.4	F	622	806
	<b>Intersection</b>	68.1	F	-	-	67.8	F	-	-

Source: VISSIM 5.4

**Alternative 2A:** Dual Lane Roundabout – a dual lane roundabout at the East Avenue intersection was considered in order to determine the infrastructure needed to apply a roundabout at this intersection that would result in acceptable levels of service. The capacity analysis indicates this intersection treatment would provide notably improved operations; with the exception of the Union Street NB left turn movement onto East Avenue, which would still experience a LOS F. However, queuing would be reduced and the 800' queues NB would interfere with Broad Street requiring a dual lane at Broad.

While improved operations would be achieved with a dual lane roundabout at the East Avenue intersection, the following constraints are identified:

- The geometric footprint of the roundabout is very large. The approaches to the roundabout with provision of splitter islands would force the RDB to be placed in the center of the available developable lands in this area.
- Notable loss of developable lands would result.
- The distance traveled by pedestrian and bicycles would be notably longer.
- Reconnecting access to the immediate parcels would be challenging.



December 18, 2013

Jim Hofmann Jr

Page 17 of 26

#### Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis

Intersection	Lane Group	AM Peak Hour				PM Peak Hour			
		Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
<b>S Union St &amp; East Ave Roundabout</b>	EB-L	8.3	A	1	37	12.4	B	3	129
	EB-T	6.4	A	1	37	9.6	A	3	129
	EB-R	2.6	A	1	37	5.4	A	3	129
	WB-L	11.1	B	4	152	12.5	B	7	249
	WB-T	8.9	A	4	152	10.8	B	7	249
	WB-R	7.3	A	4	152	9.2	A	7	249
	NB-L	7.6	A	3	106	52.5	F	262	805
	NB-T	6.2	A	3	106	46.7	E	262	805
	NB-R	5.4	A	3	106	41.3	E	262	805
	SB-L	12.0	B	5	131	8.4	A	2	79
	SB-T	8.3	A	5	131	5.6	A	2	79
	SB-R	3.8	A	5	131	2.8	A	2	79
	Intersection	8.0	A	-	-	-	A	-	-

Source: VISSIM 5.4

#### Charlotte Street/Union Street Intersection

Two major intersection alternatives were considered and evaluated at the Charlotte Street intersection. These include a traditional unsignalized, signalized intersection and a roundabout.

**Alternative 1:** Traditional unsignalized intersection – two-way stop sign control on the Charlotte Street approaches would result in failing levels of service during the weekday evening peak hour on the Charlotte Street approaches. This alternative would have one lane in each direction on Charlotte Street and a three-lane section on Union Street. This operation would also have safety concerns with southbound traffic on the Inner Loop ramp speeding through the intersection.



Intersection	Lane Group	AM Peak Hour				PM Peak Hour			
		V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service
<b>S Union St &amp; Charlotte St Unsignalized</b>	EB-LTR (1)	0.78	43.8	E	-	161	2.10	585.7	F
	WB-LTR (1)	0.46	46.9	E	-	53	2.65	959.8	F
	NB-L (1)	0.03	8.4	A	-	2	0.04	8.5	A
	NB-TR (1)	0.38	0.0	A	-	0	0.54	0.0	A
	SB-L (1)	0.02	9.1	A	-	1	0.04	10.9	B
	SB-TR (1)	0.27	0.0	A	-	0	0.29	0.0	A
	Intersection	-	10.4	B	-	-	-	134.9	F

v/c ratio = volume/capacity ratio

Source: Synchro 8/SimTraffic

**Alternative 1A:** Traditional signalized intersection – This operation would provide acceptable levels of service for all approaches with minimal queuing. It should be noted that a traffic signal may rest predominantly on the north/south approaches due to the heavy volumes. This may be a safety concern.

Design with community in mind

December 18, 2013

Jim Hofmann Jr

Page 18 of 26

#### Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis

concern with SB traffic coming off the Inner Loop ramp not slowing down through the intersection. Additional alternatives may need to be considered to address the pedestrian and bicycle conflicts at this location.

ALTERNATIVE 1A: SIGNALIZED		Intersection	LANE GROUP	AM Peak Hour					PM Peak Hour				
				V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
S Union St & Charlotte St Signalized	EB-LTR (1)	0.54	14.2	B	37	115	0.51	16.9	B	46	122		
	WB-LTR (1)	0.20	27.0	C	28	66	0.30	27.2	C	42	91		
	NB-L (1)	0.05	2.5	A	3	6	0.09	7.8	A	8	19		
	NB-TR (2)	0.27	2.9	A	35	40	0.37	7.6	A	88	177		
	SB-L (1)	0.03	5.0	A	3	10	0.07	5.5	A	4	13		
	SB-TR (1)	0.36	7.1	A	105	154	0.38	7.3	A	114	166		
Intersection		-	7.4	A	-	-	-	9.9	A	-	-		

v/c ratio = volume/capacity ratio

Source: Synchro 8/SimTraffic

**Alternative 2:** Single Lane Roundabout – a single lane roundabout at Charlotte Street would work well in isolation. As previously mentioned, intersection operations at East Avenue will affect Charlotte Street. The levels of service shown below assume a dual lane roundabout is provided at East Avenue intersection. Capacity analysis indicates this intersection treatment would provide acceptable levels of service, with the exception of the EB approach which would experience a LOS E during the weekday evening peak hour.

ALTERNATIVE 2: SINGLE LANE ROUNDABOUT WITH DUAL LANE ROUNDABOUTS AT EAST AVENUE AVENUE		Intersection	MOVEMENT	AM Peak Hour				PM Peak Hour			
				Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
S Union St & Charlotte St Roundabout	EB-L	0.0	A	3	90	8.7	A	4	134		
	EB-T	4.5	A	3	90	0.0	A	4	134		
	EB-R	7.2	A	3	90	7.9	A	4	134		
	WB-L	7.4	A	1	32	35.8	E	5	91		
	WB-T	5.6	A	1	32	0.0	A	5	91		
	WB-R	5.6	A	1	32	35.3	E	5	91		
	NB-L	5.1	A	1	80	0.0	A	5	328		
	NB-T	4.7	A	1	80	11.6	B	5	328		
	NB-R	4.4	A	1	80	0.0	A	5	328		
	SB-L	0.0	A	1	141	0.0	A	1	81		
	SB-T	0.0	A	1	141	5.4	A	1	81		
	SB-R	5.4	A	1	141	0.0	A	1	81		
Intersection		5.4	A	-	-	25.9	D	-	-		

Source: VISSIM 5.4

#### Inner Loop Ramps/Union Street Intersection

Other alternatives are being considered and evaluated for the Inner Loop Ramps/Union Street intersection. These include a T-Intersection opposite Richmond Street with variations that will include one-way and two way ramp options. This alternative would allow Union Street to provide two-way

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

traffic up to University Avenue. As this alternative would re-distribute traffic in this area, the evening peak period was analyzed as it represents the worst peak hour.

**Alternative 1:** Inner Loop one-way northbound ramp only with Union Street two-way operations. This option would force Inner Loop exiting traffic to exit at the current E. Main Street exit then proceed south through the University Avenue intersection. Due to the close proximity and synchronized signal operations at the Union/University/E. Main Street intersection, this option affects all three intersections. Analysis indicates that adding approximately 465vph (evening peak) through the E. Main Street intersection will increase delays and queuing. The analysis shown includes optimization of the geometry and signal timing between the three intersections. The analysis also includes further redistribution of traffic to reflect this alternative. This includes converting Union Street to two-way all the way to E. Main Street further enhancing access to and from the public market area. The capacity analysis results would suggest:

- Inner Loop Ramp @ E. Main/University - an additional southbound lane would be necessary to address the queuing on the ramp.
- Union @ E. Main Street – the intersection will operate at acceptable levels with the introduction of southbound traffic. Queuing is not anticipated to overflow into adjacent intersections.
- Union @ University – the addition of southbound traffic and additional phasing would still provide for acceptable levels of operation. Northbound queues may overflow into the Richmond Street intersection.
- Richmond/Union @ IL On-Ramp – This intersection would have to be signalized and provide a three lane section on Union Street. Overall acceptable levels of service would be achieved. However, long queues (400 feet) may result in the NB left turn lane onto the Inner Loop on-ramp.

December 18, 2013

Jim Hofmann Jr

Page 20 of 26

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

ALTERNATIVE 1: ONE-WAY RAMP		AM Peak Hour					PM Peak Hour				
Intersection	LANE GROUP	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
<b>S Union Street &amp; Richmond Street Signalized</b>	WB-LTR (1)			A			0.15	31.8	C	13	42
	NB-L (1)			A			0.74	18.7	B	88	414
	NB-TR (1)			A			0.33	1.6	A	43	43
	SB-T (1)			A			0.40	2.2	A	80	105
	Intersection	-		A	-	-	-	7.2	A	-	-
<b>S Union Street &amp; University Avenue Signalized</b>	EB-T (1)			A			0.60	7.1	A	60	79
	EB-R (1)			A			0.47	2.0	A	1	2
	WB-L (1)			A			0.10	11.6	B	8	22
	WB-TR (1)			A			0.52	16.0	B	199	290
	NB-L (1)			A			0.10	25.1	C	27	59
	NB-T (1)			A			0.51	38.4	D	198	277
	NB-R (1)			A			0.23	12.8	B	40	93
	SB-LTR (1)			A			0.16	47.6	D	76	132
	Intersection	-		A	-	-	-	15.2	B	-	-
<b>S Union Street &amp; Main Street Signalized</b>	EB-L (1)			A			0.01	16.8	B	3	5
	EB-TR (3)			A			0.67	25.5	C	135	170
	WB-L (1)			A			0.19	24.2	C	47	88
	WB-TR (3)			A			0.67	29.5	C	214	264
	NB-LT (1)			A			0.46	64.2	E	91	153
	NB-R (1)			A			0.54	36.8	D	105	187
	SB-LTR (1)			A			0.32	10.7	B	0	44
	Intersection	-		A	-	-	-	29.3	C	-	-
<b>Main Street &amp; University Avenue Signalized</b>	EB-L (1)			A			0.26	23.9	C	6	12
	EB-TR (3)			A			0.50	16.0	B	62	77
	WB-TR (3)			A			0.64	2.4	A	1	1
	NB-L (1)			A			0.67	42.8	D	114	209
	NB-TR (2)			A			0.66	35.1	D	121	173
	SB-L (1)			A			0.87	48.8	D	262	271
	SB-TR (2)			A			0.79	96.4	F	933	1797
	Intersection	-		A	-	-	-	24.0	C	-	-
<b>Main Street &amp; University Avenue/Pitkin Street Signalized</b>	EB-L (1)			A			0.07	22.5	C	7	23
	EB-TR (2)			A			0.53	27.5	C	162	217
	WB-T (2)			A			0.27	5.3	A	22	47
	WB-R (1)			A			0.25	1.3	A	0	9
	SB-L (2)			A			0.21	23.8	C	59	89
	SB-TR (1)			A			0.05	20.7	C	12	33
	Intersection	-		A	-	-	-	16.3	B	-	-

**Alternative 2:** this alternative would terminate the Inner Loop (two-way ramps) opposite Richmond Street with two way operations on Union Street. This alternative would eliminate the need for westbound traffic on E. Main Street to use the Pitkin Street intersection. This alternative provides for left turns to occur at the E. Main Street/University Avenue intersection.

- Richmond/Union @ IL On-Ramp – This intersection is shown with traffic signal control. Considering, Richmond is a through street; it is recommended a signal be considered at this location. Overall acceptable levels of service would be achieved.

December 18, 2013

Jim Hofmann Jr

Page 21 of 26

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

- Union/University – the additional signal phases would impact the EB approach. The EB approach will drop in level of service with queuing to exceed capacity and may impact operations at the E. Main Street intersections during peak hours.

ALTERNATIVE 2: TWO-WAY RAMP WITH LEFT AT UNIVERSITY AVE		AM Peak Hour				PM Peak Hour					
Intersection	Lane Group	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
<b>S Union Street &amp; Richmond Street Signalized</b>	EB-R (1)			A			0.62	5.2	A	0	47
	WB-LTR (1)			A			0.18	33.4	C	13	42
	NB-L (1)			A			0.43	1.9	A	7	18
	NB-TR (1)			A			0.33	1.0	A	8	17
	SB-TR (1)			A			0.11	2.3	A	11	21
	Intersection	-		A	-	-	-	3.2	A	-	-
<b>S Union Street &amp; University Avenue Signalized</b>	EB-LT (1)			A			0.60	43.9	D	410	543
	EB-R (1)			A			0.12	3.4	A	6	18
	WB-L (1)			A			0.09	11.1	B	8	22
	WB-TR (1)			A			0.51	15.2	B	194	282
	NB-L (1)			A			0.08	19.7	B	24	42
	NB-T (1)			A			0.52	30.0	C	175	197
	NB-R (1)			A			0.24	10.8	B	41	64
	Intersection	-		A	-	-	-	26.7	C	-	-
<b>S Union Street &amp; Main Street Signalized</b>	EB-L (1)			A			0.02	16.3	B	2	5
	EB-TR (2)			A			0.99	55.0	D	368	511
	WB-TR (3)			A			0.76	32.6	C	247	302
	NB-LT (1)			A			0.30	52.0	D	90	150
	NB-R (1)			A			0.43	30.5	C	91	167
	SB-LTR (1)			A			0.23	7.7	A	0	39
<b>Main Street &amp; University Avenue Signalized</b>	Intersection	-		A	-	-	-	41.3	D	-	-
	EB-L (1)			A			0.27	25.3	C	6	12
	EB-TR (3)			A			0.52	17.1	B	64	79
	WB-L (1)			A			0.74	34.7	C	7	16
	WB-TR (3)			A			0.66	3.2	A	1	17
	NB-L (1)			A			0.45	27.0	C	103	174
	NB-TR (2)			A			0.44	24.4	C	110	157
	SB-L (1)			A			0.71	50.7	D	184	294
<b>Main Street &amp; University Avenue/Pitkin Street Signalized</b>	SB-TR (2)			A			0.71	40.3	D	190	256
	Intersection	-		A	-	-	-	21.4	C	-	-
	EB-L (1)			A			0.07	23.1	C	7	23
	EB-TR (2)			A			0.54	28.5	C	165	221
	WB-T (2)			A			0.24	5.3	A	28	50
	WB-R (1)			A			0.22	1.6	A	0	8

**Alternative 3:** this alternative would terminate the Inner Loop (two-way ramps) opposite Richmond Street with two way operations on Union Street north to E. Main Street. This alternative would eliminate the need for westbound traffic on E. Main Street to use the Pitkin Street intersection and would allow left turns to occur at the E. Main Street/Union Street intersection.

- Richmond/Union @ IL On-Ramp – This intersection was assessed with stop sign control; however, while all most movements through the intersection would operate at acceptable levels, the

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

Richmond Street approach would have extremely long delays during the weekday evening peak hour. The intersection is shown with traffic signal control. Considering, Richmond is a through street; it is recommended a signal be considered at this location. Overall acceptable levels of service would be achieved. This option would have the tendency to attract cut through traffic along Richmond Street.

- Union/University – the additional signal phases would impact the EB approach. The EB approach will drop in level of service with queuing to exceed capacity and may impact operations at the E. Main Street intersections during peak hours.

ALTERNATIVE 3: TWO-WAY RAMP WITH LEFT AT S UNION STREET											
Intersection	Lane Group	AM Peak Hour					PM Peak Hour				
		V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
S Union Street & Richmond Street Signalized	EB-R (1)			A			0.61	4.9	A	0	46
	WB-LTR (1)			A			0.15	31.7	C	13	42
	NB-L (1)			A			0.44	2.7	A	12	37
	NB-TR (1)			A			0.33	1.4	A	13	17
	SB-TR (1)			A			0.12	2.8	A	13	25
	Intersection	-		A	-	-	-	3.5	A	-	-
S Union Street & University Avenue Signalized	EB-L (1)			A			0.03	7.4	A	2	5
	EB-TR (1)			A			0.60	18.6	B	371	507
	WB-L (1)			A			0.10	11.6	B	8	22
	WB-TR (1)			A			0.52	16.0	B	199	290
	NB-L (1)			A			0.10	20.9	C	25	44
	NB-T (1)			A			0.51	30.3	C	180	206
	NB-R (1)			A			0.23	12.0	B	44	69
	SB-TR (1)			A			0.16	47.5	D	76	132
	Intersection	-		A	-	-	-	21.1	C	-	-
S Union Street & Main Street Signalized	EB-L (1)			A			0.01	16.7	B	2	5
	EB-TR (3)			A			0.67	26.7	C	147	204
	WB-L (1)			A			0.19	24.2	C	47	88
	WB-TR (3)			A			0.67	29.5	C	214	264
	NB-LT (1)			A			0.45	62.7	E	91	153
	NB-R (1)			A			0.53	35.3	D	90	158
	SB-LTR (1)			A			0.31	10.5	B	0	44
Main Street & University Avenue Signalized	Intersection	-		A	-	-	-	29.6	C	-	-
	EB-L (1)			A			0.26	23.9	C	6	12
	EB-TR (3)			A			0.50	16.1	B	62	77
	WB-TR (3)			A			0.64	2.4	A	1	1
	NB-L (1)			A			0.66	41.8	D	114	209
	NB-TR (2)			A			0.65	34.5	C	121	173
	SB-L (1)			A			0.88	49.8	D	294	480
Main Street & University Avenue/Pitkin Street Signalized	SB-TR (2)			A			0.36	25.6	C	98	139
	Intersection	-		A	-	-	-	21.1	C	-	-
	EB-L (1)			A			0.07	22.5	C	7	23
	EB-TR (2)			A			0.53	27.5	C	162	217
	WB-T (2)			A			0.26	5.3	A	22	47
	WB-R (1)			A			0.24	1.3	A	0	9
	SB-L (2)			A			0.22	23.9	C	59	89
Intersection	SB-TR (1)			A			0.05	20.7	C	12	33
	-			A	-	-	-	24.0	C	-	-

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

**Alternative 3A:** this alternative offers a slight variation from Alternative 3 which would suggest leaving the Richmond Street/Inner Loop ramp intersection as an unsignalized intersection and converting Richmond Street as a one-way EB (away from Union Street) or creating a greenway street for neighborhood traffic only. This alternative would have several affects:

- Richmond/Union @ IL On-Ramp – Stop sign control would be sufficient to provide overall acceptable levels of operation with removal of Richmond Street traffic. Overall acceptable levels of service would be achieved. A one-way Richmond may still attract some cut-through traffic, but less than if signalized.
- Charlotte Street/Union – this intersection is projected to operate with long delays if stop-sign control is installed on the Charlotte Street approaches. However, based on the 2035 traffic volumes, traffic signal warrants may not be met. Hence, under this alternative, Charlotte Street should remain stop-sign controlled until volumes and delays meet warrants. This intersection may need to be reassessed with subsequent E. Main Street/University Avenue plans.

Various options were presented to the Richmond Street neighborhood such as closure of the street at Union Street, providing a right-out only diverter at Union Street, one-way travel patterns or do nothing. While these features are still being refined, the right-out diverter option is being moved forward as part of this assessment. More details will be identified of this approach through the final design phase.

### Cycle Track Signal Analysis

What is a cycle track phase? A cycle track signal phase is an exclusive phase that would require all vehicles to stop and only allow bicycles to move. This phase is normally justified when volumes on a cycle track reach higher volumes. Typically a 10 second phase (w/ 4 seconds yellow and 2 seconds red) would be required. This phase was incorporated into the traffic signal operations at each of the corridor intersections and would impact intersection operations at each location. The Monroe/Chestnut and East Avenue intersections would see the greatest impact:

- Howell/Monroe/Chestnut – weekday evening peak operations would drop to overall LOS D with the northbound and southbound approaches failing with long queuing (300'-700').
- East Avenue/Union – the intersection would see a drop in levels of operation with the 4-lane section on East Avenue.

This option is not recommended at this time. When and if bicycle traffic increases to a level that would justify the need for additional traffic control, cycle track signal phase can be considered.

December 18, 2013

Jim Hofmann Jr

Page 24 of 26

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

DEDICATED CYCLE TRACK PHASE		Intersection	LANE GROUP	AM Peak Hour					PM Peak Hour						
				V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)		
Inner Loop/Howell Street & Chestnut Street/Monroe Avenue Signalized	EB-L (1)	0.65	31.1	C	112	238	0.46	29.6	C	44	82				
	EB-T (1)	0.50	32.8	C	154	326	0.49	34.3	C	145	268				
	EB-R (1)	0.26	3.1	A	0	31	0.14	0.4	A	0	0				
	WB-L (1)	0.07	21.2	C	10	28	0.07	22.1	C	10	28				
	WB-TR (2)	0.42	32.4	C	100	145	0.74	41.5	D	232	302				
	NB-L (1)	0.75	44.7	D	86	147	1.29	187.6	F	189	355				
	NB-TR (1)	0.71	35.9	D	265	357	0.51	26.9	C	186	275				
	SB-T (1)	0.75	49.0	D	196	280	1.18	136.2	F	483	696				
	SB-R (1)	0.20	0.3	A	0	0	0.85	6.5	A	0	0				
	Intersection	-	29.9	C	-	-	-	51.2	D	-	-				
S Union St & E Broad St Signalized	EB-L (1)	0.40	45.0	D	54	99	0.85	57.7	E	204	316				
	EB-R (1)	0.17	13.7	B	0	29	0.37	7.1	A	0	47				
	NB-L (1)	0.78	42.2	D	65	176	0.25	11.6	B	20	38				
	NB-T (1)	0.72	21.5	C	322	467	0.72	20.4	C	340	448				
	SB-TR (1)	0.91	30.7	C	148	576	0.78	18.8	B	139	163				
	Intersection	-	28.6	C	-	-	-	24.6	C	-	-				
S Union St & East Ave Signalized	EB-LTR (2)	0.37	29.2	C	66	103	0.81	42.3	D	194	272				
	WB-LTR (2)	0.87	42.0	D	185	279	0.99	61.0	E	193	312				
	NB-L (1)	0.45	19.9	B	26	47	0.18	14.7	B	17	27				
	NB-TR (2)	0.64	22.6	C	123	202	0.95	42.8	D	307	268				
	SB-L (1)	0.57	31.8	C	84	160	0.92	74.8	E	142	272				
	SB-TR (2)	0.77	33.9	C	144	257	0.72	32.6	C	162	312				
S Union St & Charlotte St Signalized	Intersection	-	31.3	C	-	-	-	46.9	D	-	-				
	EB-LTR (1)	0.55	15.2	B	41	121	0.53	20.6	C	62	139				
	WB-LTR (1)	0.20	27.3	C	29	67	0.30	28.7	C	45	93				
	NB-L (1)	0.10	8.1	A	4	6	0.17	7.4	A	7	8				
	NB-TR (2)	0.40	8.2	A	45	60	0.55	7.7	A	67	72				
	SB-L (1)	0.06	15.6	B	6	19	0.13	17.0	B	8	25				
	SB-TR (1)	0.54	21.9	C	203	298	0.56	21.7	C	216	315				
	Intersection	-	14.7	B	-	-	-	14.5	B	-	-				

V/c ratio = volume/capacity ratio

Source: Synchro 8/SimTraffic

The other option is to allow bicycles to cross when pedestrians are crossing. In this case, it is recommended that a leading pedestrian phase of 6 seconds be provided. This opportunity for pedestrians and bicyclists to get an advance to cross provides better visibility to motorists. The capacity analysis at the corridor intersections with an advanced 6 second pedestrian phase indicates:

December 18, 2013

Jim Hofmann Jr

Page 25 of 26

**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

SIX SECOND LEAD Ped/Cycle Track Phase											
Intersection	Lane Group	AM Peak Hour					PM Peak Hour				
		V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)	V/C Ratio	Delay	Level of Service	50th Queue (ft)	95th Queue (ft)
Inner Loop/Howell Street & Chestnut Street/Monroe Avenue Signalized	EB-L (1)	0.52	21.6	C	92	163	0.46	29.6	C	44	82
	EB-T (1)	0.43	25.5	C	127	270	0.49	34.3	C	145	268
	EB-R (1)	0.24	4.6	A	0	45	0.14	0.5	A	0	0
	WB-L (1)	0.05	5.7	A	3	7	0.07	22.1	C	10	28
	WB-TR (2)	0.36	15.1	B	92	127	0.74	41.5	D	232	302
	NB-L (1)	0.66	33.6	C	79	120	0.98	77.2	E	136	305
	NB-TR (1)	0.67	31.2	C	243	324	0.41	18.7	B	153	227
	SB-T (1)	0.73	45.6	D	185	262	0.98	66.8	F	394	622
	SB-R (1)	0.20	0.3	A	0	0	0.85	6.5	A	0	0
	Intersection	-	22.8	C	-	-	-	31.4	C	-	-
S Union St & E Broad St Signalized	EB-L (1)	0.40	45.0	D	54	99	0.81	52.1	D	198	283
	EB-R (1)	0.17	13.7	B	0	29	0.36	6.7	A	0	45
	NB-L (1)	0.52	13.7	B	27	57	0.23	10.4	B	19	36
	NB-T (1)	0.61	9.9	A	296	174	0.70	18.3	B	322	424
	SB-TR (1)	0.73	16.4	B	142	181	0.74	18.5	B	141	214
	Intersection	-	14.8	B	-	-	-	22.6	C	-	-
S Union St & East Ave Signalized	EB-LTR (2)	0.34	26.9	C	64	96	0.74	36.6	D	183	250
	WB-LTR (2)	0.82	40.0	D	191	251	0.91	45.5	D	190	290
	NB-L (1)	0.36	10.5	B	21	34	0.14	10.5	B	16	21
	NB-TR (2)	0.51	14.9	B	122	143	0.82	30.1	C	296	192
	SB-L (1)	0.51	18.8	B	54	123	0.80	52.5	D	135	233
	SB-TR (2)	0.65	21.9	C	138	196	0.60	20.9	C	149	207
S Union St & Charlotte St Signalized	Intersection	-	24.3	C	-	-	-	34.6	C	-	-
	EB-LTR (1)	0.54	13.7	B	35	112	0.53	19.8	B	58	136
	WB-LTR (1)	0.20	27.0	C	28	66	0.30	28.6	C	45	93
	NB-L (1)	0.08	6.1	A	4	7	0.13	5.6	A	6	8
	NB-TR (2)	0.35	6.5	A	44	55	0.48	6.2	A	64	76
	SB-L (1)	0.05	12.2	B	5	16	0.10	12.3	B	7	21
	SB-TR (1)	0.48	17.1	B	178	261	0.49	16.1	B	183	267
	Intersection	-	12.1	B	-	-	-	12.0	B	-	-

v/c ratio = volume/capacity ratio

Source: Synchro 8/SimTraffic

This document provides an engineering assessment of capacity effects and geometric needs at each of the corridor intersections. Various sub options were either discussed or sketched with various stakeholders through the development process that may not be analyzed; some of these sub options may have addressed other geometric or operational opportunities, but may not affect the capacity analysis results already reflected in the options presented. This document does not reflect an all exhaustive list of every idea presented, however covers all the major options.

It is anticipated that the preferred treatment at each location will formulate the preferred corridor alternative. The analysis for the entire corridor will be refined to include the effects of the cycle track operations (6 second lead ped phase), reflect the final traffic volumes, reflect the storage lengths shown on the corridor concept, and include more accurate clearance intervals and other site specific characteristics at each location.



December 18, 2013

Jim Hofmann Jr


Page 26 of 26


**Reference: Inner Loop East – Intersection Alternatives – Capacity Analysis**

Sincerely,

A handwritten signature in black ink that reads "Paula F. Benway".

Paula Flores Benway, FITE  
ITE Northeastern International Director  
Associate, Transportation  
Phone: (585) 413-5284  
Fax: (585) 272-1814  
Paula.Benway@stantec.com

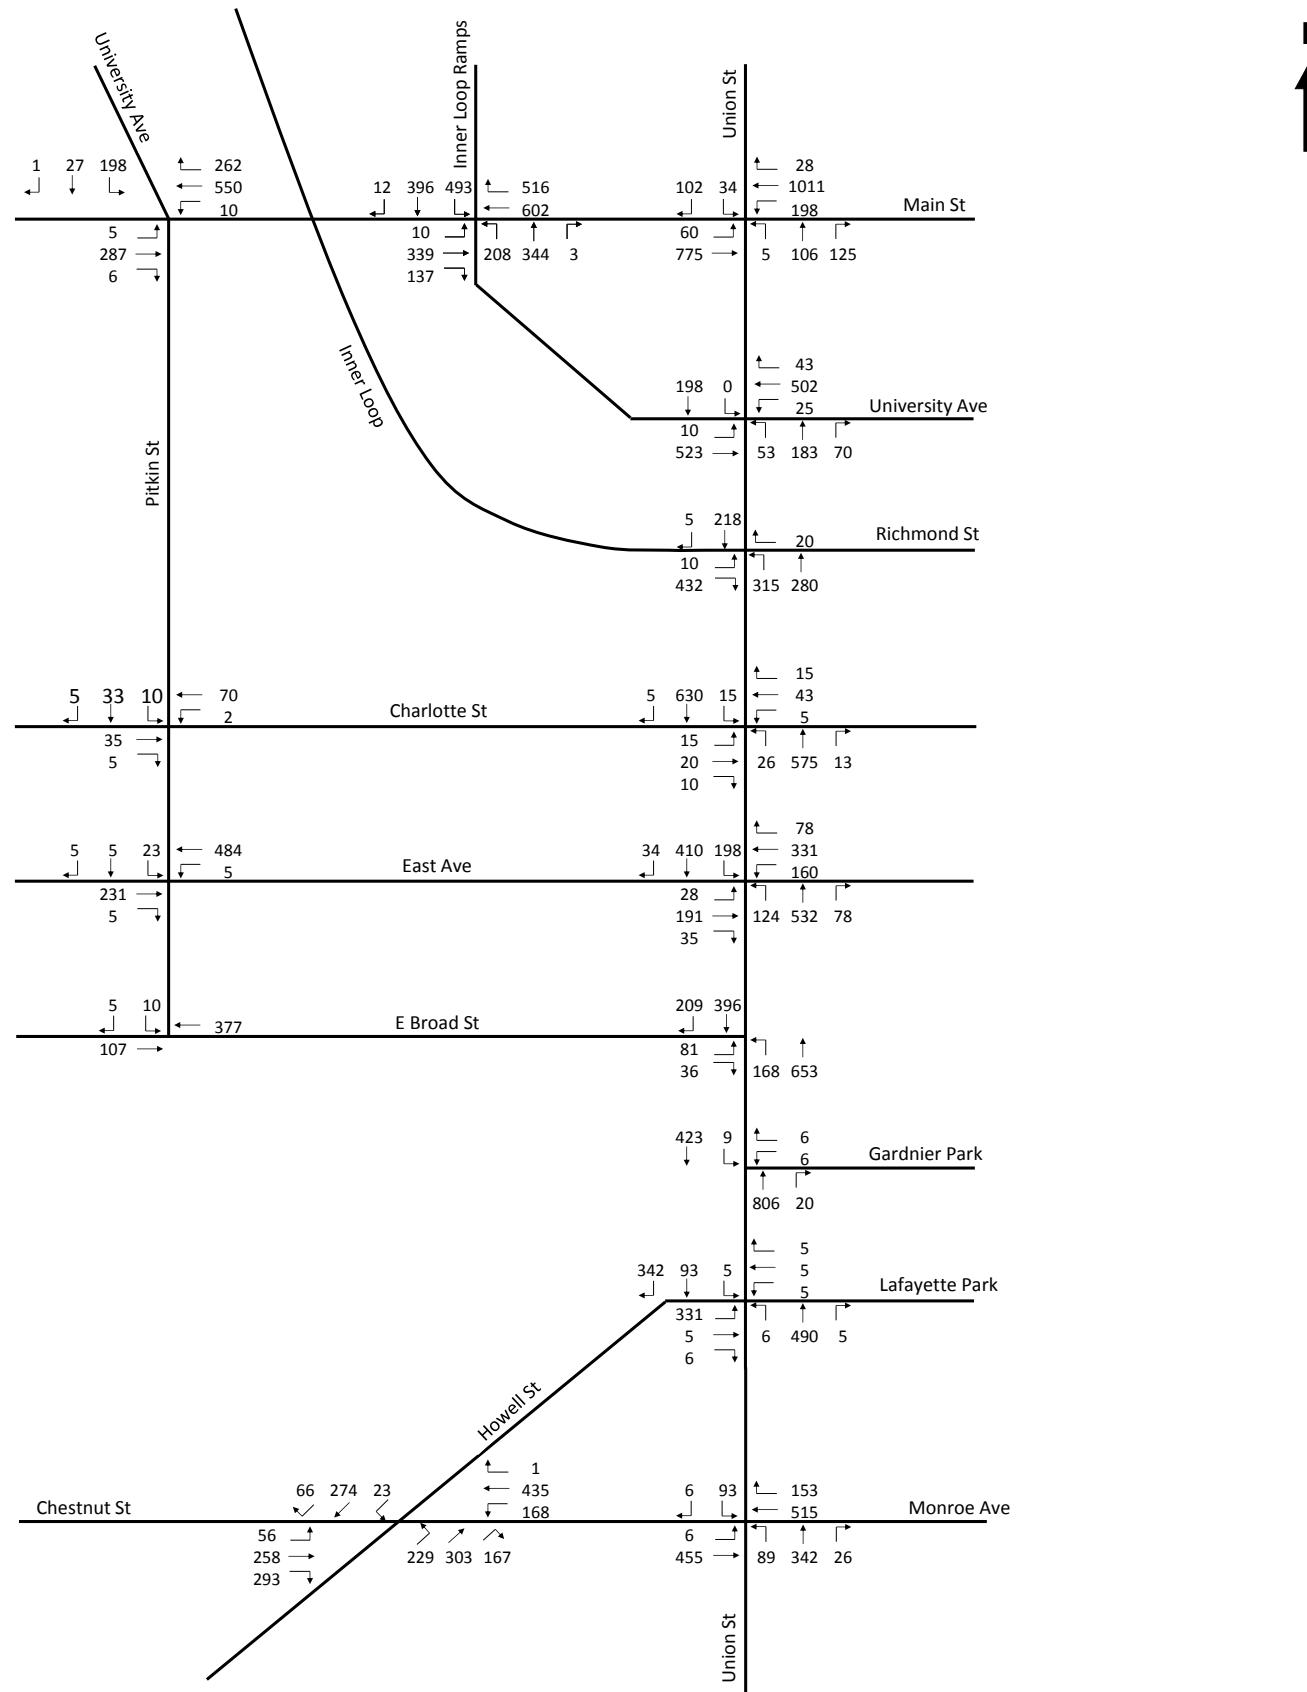

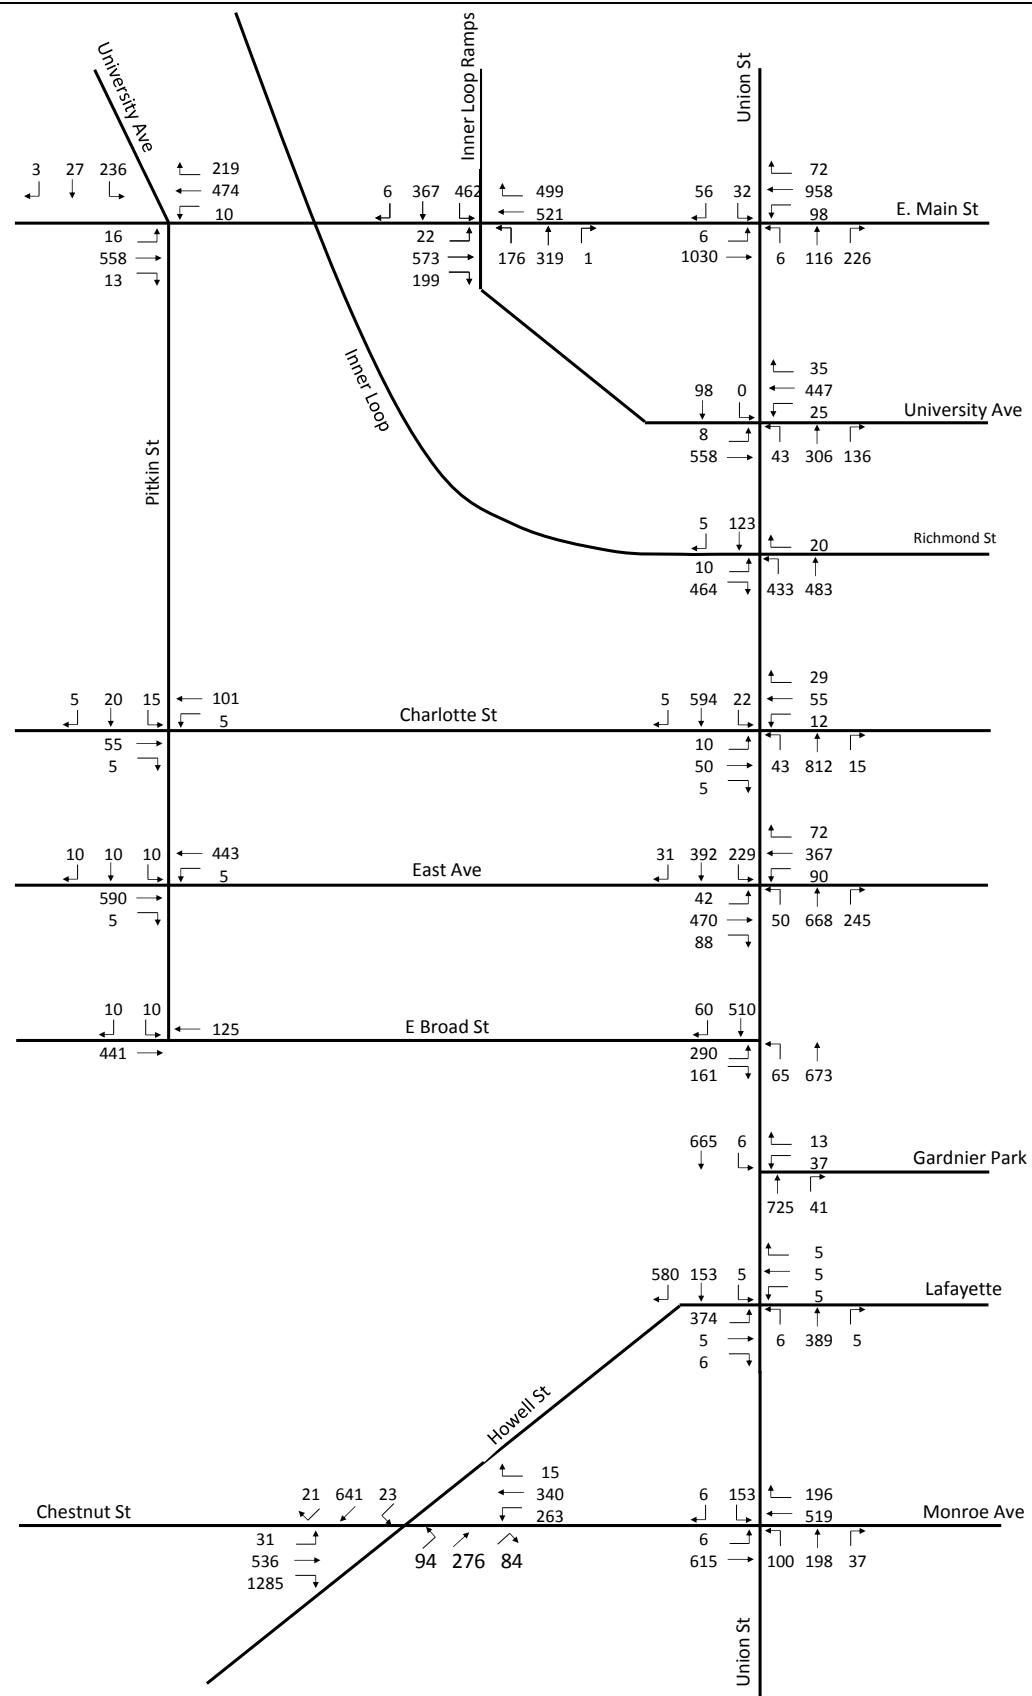



# **APPENDIX H**

## **Accident Analysis**



## Memo

### Inner Loop – *Accident History*



**Stantec**

Date: December 17, 2008  
To: Bill Holthoff, Stantec  
From: Paula Benway, Stantec

#### Inner Loop Accident Data

The most recent available accident information was obtained for the section of the inner loop from the Rt. 490 interchange in the east to north of the East Main Street interchange. Information available represents a 39-month period between January 1, 2005 and March 7, 2008. The accident history identified a total of 49 accidents occurred along the Inner Loop in this area. The reportable accidents accounted for 30 (61%) of the total accidents and the non-reportable accidents accounted for 19 (39%) of the total accidents. The following list summarizes the types and number of reportable accidents. The rest of the assessment (analysis, rates and potential corrective action) will be related to the reportable type accidents that occurred in the corridor.

- Fixed Object – 17 (57%)
- Sideswipe – 5 (17%)
- Rear End – 4 (13%)
- Right Angle – 1 (3%)
- Head-on – 1 (3%)
- Unknown – 2 (7%)

The accident severity included 13 injuries (43%) and 17 (57%) property damage only. Fifty three percent of all accidents occurred during evening hours with 55% occurring on dry pavement conditions. Seventy percent of the vehicles involved were traveling in a westerly direction. As indicated above, 57% of the accidents involved collision with fixed objects (guide rail, curbing, abutment, debris). Only four of the 30 accidents occurred at a merge/diverge ramp location, with the majority of accidents occurring main line along the horizontal curve between East Main Street and East Avenue. The accident rate for the corridor was calculated and compared to statewide accident rates for Principal Arterial expressways. The current accident rate is 2.48 accidents per million vehicle miles (acc/mvm) which is below the statewide average of 2.72 acc/mvm.

Collision diagrams, detailed accident history, and rate calculations are attached.

#### Extended Study Area

An extended study area was also reviewed that included at grade adjacent corridors including: East Main Street, Monroe Avenue/Chestnut, Pitkin Street, Union Street, and a portion of Interstate 490. The following table summarizes the number of reportable accidents and the calculated accident rates for the corridor and intersections for each of these adjacent roadways.

December 17, 2008

Inner Loop

Page 2 of 4

**ACCIDENT RATES**

<b>Intersection</b>	<b>Number of Accidents</b>	<b>State/County Rate</b>	<b>Actual Rate</b>	
<b>Intersection Rate (excludes midblock accidents)</b>				
East Main Street @ University/Pitkin	7	0.26 / 0.46	0.33	ACC/MEV
East Main Street @ Inner Loop/University	40	0.26 / 0.46	0.96	ACC/MEV
East Main Street @ Union Street	23	0.26 / 0.46	0.83	ACC/MEV
Pitkin Street @ East Ave	8	0.34 / 0.22	0.44	ACC/MEV
Pitkin Street @ Broad Street	4	0.34 / 0.22	0.66	ACC/MEV
Union Street @ University Ave	14	0.34 / 0.22	0.65	ACC/MEV
Union Street @ East Ave	17	0.34 / 0.22	1.13	ACC/MEV
Union Street @ Broad St	3	0.19 / 0.22	0.71	ACC/MEV
Monroe Avenue @ Inner Loop/ Pitkin St.	7	0.34 / 0.22	0.26	ACC/MEV
Monroe Avenue @ Howell St.	5	0.34 / 0.22	0.34	ACC/MEV
Monroe Avenue @ South Union St.	20	0.34 / 0.22	1.12	ACC/MEV
<b>Link Rate</b>				
<b>Inner Loop - 940T</b>				
Rt. 490-E. Main St.	30	2.72	2.48	ACC/MVM
<b>I-490</b>				
W.of River -E. of Clinton	47	2.72	1.08	ACC/MVM

Locations experiencing above state or county wide accident rates are highlighted in red. Both sections of the expressway system (Inner Loop and I-490) are experiencing accident occurrences below the average rates. Each of the adjacent corridors is further assessed below.

**Corridor Breakdown**

**East Main Street corridor**– 80 accidents occurred over a 41-month period from University Avenue in the west to Union Street in the east. There were 27(35%) rear-end accidents, 18(23%) sideswipe, 15(20%) right angle, 6(8%) overtaking, 7(8%) left turn, 2(2%) fixed object, 1 backing, 1 bicycle and 2(2%) unknown accidents that occurred at the three intersections along East Main Street. The severity of these accidents included 15(19%) injuries and 65(81%) property damage only. Seventy four percent of all accidents occurred during daylight hours with 70% occurring on dry pavement conditions. The East Main Street intersections with the Inner Loop/University Avenue and the Union Street intersection are experiencing accident rates above the state/county wide average rates.

December 17, 2008

Inner Loop

Page 3 of 4

*Inner Loop/University Intersection* – of the 40 accidents that occurred at this intersection, 13(33%) were vehicles sideswiping/overtaking in the left turn lanes on the Inner Loop ramp approach and the University Avenue approach. These accidents are attributable to driver confusion, inattention to turning maneuvers, unsafe lane change or possible narrow lane widths. The other major accident type occurring at this intersection is rear-end accidents 13 (33%) of the total; driver inattention is noted as a contributing factor.

*North Union Street Intersection* – of the 23 accidents that occurred at this intersection, 8(35%) were vehicles sideswiping/overtaking on the North Union Street northbound approach and the East Main Street westbound approach. These accidents are attributable to driver confusion, inattention to turning maneuvers, unsafe lane changes or possible narrow lane widths. The other major accident type occurring at this intersection is rear-end accidents 8 (35%) of the total; driver inattention is noted as a contributing factor.

**Monroe Avenue/Chestnut corridor** – 50 accidents occurred over a 41-month period along the section from Chestnut north of Inner Loop to South Union Street intersection to the south. There were 20 (40%) rear-end accidents, 11(22%) right angle, 6(12%) sideswipe, 4(8%) right turn, 3(6%) fixed object, 2(4%) left turn, 1(2%) head on, 1(2%) bicycle, 1(2%) driveway and 1 unknown accident. The severity of these accidents included 66% property damage only, 32% resulted in injuries and one fatality (motorcycle) did occur. Sixty two percent of the accidents occurred during daylight hours, and with 68% occurring on dry pavement conditions. The South Union intersection with Monroe Avenue is experiencing an accident rate above the state/county wide average.

*South Union Intersection* – of the 20 accidents that occurred at this intersection, 8(40%) were right angle accidents with the South Union approach. These accidents are attributable to driver inattention and visibility constraints. The other major accident type occurring at this intersection is rear-end accidents 7 (35%) of the total; driver inattention is noted as a contributing factor.

**Pitkin Street corridor** – 12 accidents occurred over a 29-month period. There were 5(42%) rear-end accidents, 3(25%) right angle, 1(8%) right turn, 1(8%) overtaking, 1(8%), pedestrian, 1(8%) unknown accident. Ninety two percent of the accidents involved property damage only, with 58% occurring during daylight hours, and with 58% occurring on dry pavement conditions. The East Avenue and Broad Street intersections with Pitkin Street are experiencing accident rates above the state/county wide average rates. Review of the accidents occurring at either intersection does not show a predominant accident pattern.

**Union Street corridor** – 61 accidents occurred over a 39-month period. There were 21(34%) right angle, 12(20%) rear-end, 10(16%) left turn, 4(6%) backing up, 3(5%) sideswipe, 3(5%) fixed object, 3(5%) right turn, 3(5%) unknown, 1 driveway and 1 overtaking accident. Eighty four percent of the accidents involved property damage only, and evenly distributed during daylight/evening hours, and with 74% occurred on dry pavement conditions. Further review of the actual reports suggests that the rear end accidents were primarily a result of following too closely. The University Avenue and East Avenue intersections with Union Street are experiencing accident rates above the state/county wide average rates.

*University Avenue Intersection* – of the 14 accidents that occurred at this intersection, 8(57%) were right angle accidents. These accidents are attributable to driver inattention

and possible visibility constraints.

*East Avenue Intersection* – of the 17 accidents that occurred at this intersection, 12(71%) were right angle accidents. These accidents are attributable to driver inattention and possible visibility constraints related to bridge railing over the Inner Loop and building on the southeast quadrant.

**I-490 corridor** – 47 accidents occurred over a 33-month period. The 47 accidents consisted of 18(38%) fixed object accidents, 16(34%) rear-end, 8(17%) overtaking, 3(6%) unknown, 1 head-on and 1 sideswipe accident. The accident severity included 16(34%) injuries and 31(66%) property damage only. Sixty six percent of the accidents occurred during daylight hours, and with 60% occurring on dry pavement conditions. The majority of fixed object accidents involved unsafe travel speeds for the conditions (wet, construction, grade, or curvature of road).

#### **STANTEC CONSULTING SERVICES INC.**

Attachments: Accident Rate Calculations, Collision Diagrams, Detailed Accident History

## ACCIDENT RATE CALCULATIONS

Project Name:

**Inner Loop**

Date:

12/10/2008

### Intersection Rate

(excludes midblock accidents)

#### East Main Street @ University Ave/Pitkin

# Accidents	Per Million Entering Vehicles		
7 16,950 Vehicles/Day	x 3.4 # of Years	x 365 Days/Year	= <b>0.33</b> ACC/MEV 0.26 Statewide Rate 0.46 County Rate

#### Inner Loop/University

# Accidents	Per Million Entering Vehicles		
40 33,450 Vehicles/Day	x 3.4 # of Years	x 365 Days/Year	= <b>0.96</b> ACC/MEV 0.26 Statewide Rate 0.46 County Rate

#### Union Street

# Accidents	Per Million Entering Vehicles		
23 22,350 Vehicles/Day	x 3.4 # of Years	x 365 Days/Year	= <b>0.83</b> ACC/MEV 0.26 Statewide Rate 0.46 County Rate

#### Pitkin Street @

##### East Ave

# Accidents	Per Million Entering Vehicles		
8 16,450 Vehicles/Day	x 3 # of Years	x 365 Days/Year	= <b>0.44</b> ACC/MEV 0.34 Statewide Rate 0.22 County Rate

##### Broad Street

# Accidents	Per Million Entering Vehicles		
4 5,550 Vehicles/Day	x 3 # of Years	x 365 Days/Year	= <b>0.66</b> ACC/MEV 0.34 Statewide Rate 0.22 County Rate

#### Union Street @

##### University Ave

# Accidents	Per Million Entering Vehicles		
14 19,600 Vehicles/Day	x 3 # of Years	x 365 Days/Year	= <b>0.65</b> ACC/MEV 0.34 Statewide Rate 0.22 County Rate

##### East Ave

# Accidents	Per Million Entering Vehicles		
17 13,700 Vehicles/Day	x 3 # of Years	x 365 Days/Year	= <b>1.13</b> ACC/MEV 0.34 Statewide Rate 0.22 County Rate

##### Broad St

# Accidents	Per Million Entering Vehicles		
3 3,850 Vehicles/Day	x 3 # of Years	x 365 Days/Year	= <b>0.71</b> ACC/MEV 0.19 Statewide Rate 0.22 County Rate

#### Monroe Avenue @

##### Inner Loop/ Pitkin St.

# Accidents	Per Million Entering Vehicles		
7 21,310 Vehicles/Day	x 3.4 # of Years	x 365 Days/Year	= <b>0.26</b> ACC/MEV 0.34 Statewide Rate 0.22 County Rate

##### Howell St.

# Accidents	Per Million Entering Vehicles		
5 11,750 Vehicles/Day	x 3.4 # of Years	x 365 Days/Year	= <b>0.34</b> ACC/MEV 0.34 Statewide Rate 0.22 County Rate

##### South Union St.

# Accidents	Per Million Entering Vehicles		
20 14,400 Vehicles/Day	x 3.4 # of Years	x 365 Days/Year	= <b>1.12</b> ACC/MEV 0.34 Statewide Rate 0.46 County Rate

**Total Link Rate**

(All midblock &amp; intersection accidents)

**Inner Loop - 940T**      **Rt. 490-E. Main St.**

	<b># Accidents</b>	<b>Per Million Entering Vehicles</b>				=	2.48	ACC/MVM
Length (miles)	30	x	1,000,000	x	Days/Year			
Vehicles/Day	1	x	10,200	x	# of Years	3.25		

2.72    Statewide Rate  
0.00    County Rate

**I-490**      **W.of River -E. of Clinton**

	<b># Accidents</b>	<b>Per Million Entering Vehicles</b>				=	1.08	ACC/MVM
Length (miles)	47	x	1,000,000	x	Days/Year			
Vehicles/Day	0.5	x	86,970	x	# of Years	2.75		

2.72    Statewide Rate  
0.00    County Rate

DETAILS OF ACCIDENT HISTORY	
Sear-Brown Group	

County of Monroe	Inner Loop
Town of City of Rochester	

Diagram:	Inner Loop	Street Name:	Inner Loop (Rt. 940T)
Route Number:		Location:	Inner Loop
Milepost:	E. Main St	To:	I-490
Date of Report:	1/13/2000		

P.I.N.	
Case No.	
File	
By	
Page Number	1

<u>PERIOD STUDIED</u>	
From	To:
1/1/2005	3/7/2008
39 Months	

(1) No.	(2) Date	(3) Time
6001	6/5/2006	16:15

(1) No.	(2) Date	(3) Time	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	(12)
6001	6/5/2006	16:15	PDO	1	2	1	17,13			Side	V2 STRUCK V1 AT EXIT LANE FOR MONROE AVE. (7) Failure to Yield Right of Way (13) Passing or Lane Usage Improper
6004	12/16/2007	5:43	Inj	4	4	2	12,19			FixO	V1 STRUCK GUIDE RAIL, THEN STRUCK GUIDE RAIL WITH LEFT SIDE (2) Alcohol Involvement (19)
6005	2/9/2007	0:29	Inj	4	4	4	4,2,66			FixO	V1 SPUN OUT OF CONTROL, HITTING WALL & FLIPPING ONTO ITS ROOF. (2) Alcohol Involvement (66) Pavement Slippery
6006	3/7/2008	21:30	Inj	4	6	4	4,66			FixO	V1 HIT ICY PATCH ON THE ROAD , SPUN OUT & HIT GUARD RAIL. (66) Pavement Slippery
6009	7/5/2007	1:00	PDO	4	1	1	12,13			FixO	V1 LEFT IT'S LANE & STRUCK GUARD RAIL (2) Alcohol Involvement (13) Passing or Lane Usage Improper
6011	6/10/2005	16:05	PDO	1	2	1	113			Side	V1 PASS V2, LOST CONTROL STRIKING V2 (13) Passing or Lane Usage Improper
6012	2/8/2006	16:16	Inj	1	1	1	29			REnd	Acc. Main St to Acc. E. Ave (9) Following Too Closely
6013	11/16/2006	18:29	PDO	4	5	2	3,66			FixO	Acc. Main St to Acc. E. Ave (66) Pavement Slippery
6016	6/2/2007	12:05	Inj	1	1	1	14			RAng	Imp from Main St (4) Driver Inattention
6017	9/22/2006	7:49	PDO	1	5	1	119,13			FixO	Acc. Main St to Acc. E. Ave (19) Unsafe Speed (13) Passing or Lane Usage Improper
6018	4/8/2007	14:23	Inj	1	5	1	19			REnd	Acc. Main St to Acc. E. Ave (9) Following Too Closely
6019	4/4/2005	22:40	Inj	4	1	1	20,19			Side	Acc. Main St to Acc. E. Ave (20) Unsafe Lane Changing (19) Unsafe Speed
6020	10/19/2006	19:00	Inj	4	4	2	3,19,66			FixO	Acc. Main St to Acc. E. Ave (19) Unsafe Speed (66) Pavement Slippery
6021	1/24/2007	1:40	Inj	4	5	2	2,13			FixO	Acc. Main St to Acc. E. Ave (13) Passing or Lane Usage Improper

**DETAILS OF  
ACCIDENT HISTORY**

---

Sear-Brown Group

Diagram: Inner Loop  
 County of Monroe  
 Town of City of Rochester

<u>PERIOD STUDIED</u>	
From 1/1/2005	To 3/7/2008
39 Months	

Diagram: Inner Loop	Street Name: Inner Loop (Rt. 940T)
Route Number:	Location: Inner Loop
	Milepost: E. Main St To: I-490
Date of Report:	1/13/2000

P.I.N.	_____
Case No.	_____
File	_____
By	_____
Page Number	2

(1) No.	(2) Date	(3) Time	(4) Contributing Factors	(5) Apparent Cause	(6) Contributing Factors	(7) Apparent Cause	(8) Contributing Factors	(9) Apparent Cause	(10) Contributing Factors	(11) Apparent Cause	(12) Contributing Factors
6022	1/26/2007	23:35	PDO	4 5 4 2 19,66						FixO	Acc. Main St to Acc. E. Ave (19) Unsafe Speed (66) Pavement Slippery
6023	2/15/2007	8:02	PDO	1 5 4 1 19,66						FixO	Acc. Main St to Acc. E. Ave (19) Unsafe Speed (66) Pavement Slippery
6024	2/15/2007	9:45	Inj	1 1 4 1 19,66						REnd	Acc. Main St to Acc. E. Ave (19) Unsafe Speed (66) Pavement Slippery
6025	7/5/2007	0:10	PDO	4 1 1 1 12,13						FixO	Acc. Main St to Acc. E. Ave (2) Alcohol Involvement (13) Passing or Lane Usage Improper
6026	10/19/2006	18:22	PDO	4 1 2 3 19,64						REnd	Main St Ramp (19) Unsafe Speed (64) Obstruction/Debris
6027	1/20/2005	8:04	PDO	1 1 4 4 19,66						FixO	Access E. Ave to Ramp Chapman St. (19) Unsafe Speed (66) Pavement Slippery
6028	2/16/2007	4:30	PDO	4 1 4 4 66						Side	Access E. Ave to Ramp Chapman St. (66) Pavement Slippery
6029	6/10/2005	16:05	PDO	1 1 1 1 13						Side	Access Ramp Chapman St to Access Buena St (13) Passing or Lane Usage Improper
6030	1/1/2005	4:24	Inj	4 1 1 2 2						FixO	Slip Ramp from Pitkin (2) Alcohol Involvement
6032	5/26/2007	11:25	PDO	1 6 1 1 19,47						FixO	Ramp Chapman St to Access Buena St (19) Unsafe Speed (47) Tire Failure/inadequate
6033	12/20/2006	6:45	PDO	2 1 1 1 64						Unkn	Ramp to Buena St - V1 hit debris in the road (64) Obstruction/Debris
6034	7/27/2007	11:17	PDO	4 5 1 1 2,20						FixO	I-490 East Ramp-crashed into attenuator at diverge pt. (2) Alcohol Involvement (20) Unsafe Lane Changing
6038	9/13/2006	22:45	1	PDO	4 1 260					Unkn	I-490 East Ramp - truck on fire in construction zone (60) Other Vehicular
6039	5/26/2007	11:25	1	PDO	1 6 1 1 19,47					FixO	South overpass - going straight, hit curb, unsafe speed (19) Unsafe Speed (47) Tire Failure/inadequate

P.I.N.	_____
Case No.	_____
File	_____
By	_____
Page Number	3

Diagram:	Inner Loop
Street Name:	Inner Loop (Rt. 940T)
Route Number:	
Location:	Inner Loop
Milepost:	E. Main St
To:	I-490
Date of Report:	1/13/2000

DETAILS OF ACCIDENT HISTORY	
County of Monroe	
Town of City of Rochester	
Sear-Brown Group	

<u>PERIOD STUDIED</u>	(4)	(5)	(6)	(7)	(8)	(9)
From 1/1/2005	v	s	l	r	s	
To: 3/7/2008	e	e	g	o	u	
39 Months	h	v	h	a	r	w
	i	e	t	d	f	e
	c	r	c	c	c	a
	i	i	o	o	o	t
	e	t	n	n	n	
	s	y	d	d	d	

(12) Description						
(1) No.	(2) Date	(3) Time				
6040	1/5/2008	2:18	2	Inj	4	1 217,20
6041	1/11/2008	6:31	1	Inj	2	4 2 319,66

				H-On	E. Clinton Overpass- wrong way on Inner loop (17) Traffic Control Disregarded (20) Unsafe Lane Changing
				FixO	W of Clinton overpass - unsafe speed, pavement slippery (19) Unsafe Speed (66) Pavement Slippery

**Location:** Inner Loop

**Town:** City of Rochester

13-Jan-09

**County:** Monroe

			<b>Milepost:</b> E. Main St		<b>To:</b> I-490			
<b>Time of Day</b>	<b>No. of Accidents</b>	<b>% of Total</b>	<b>Direction</b>	<b># Veh</b>	<b>% of Total</b>	<b>Direction</b>	<b># Veh</b>	<b>% of Total</b>
6 AM - 10 AM	6	20	North:	0	0	NorthEast:	0	0
10:00 AM - 4 PM	5	17	South:	1	2.3	NorthWest:	1	2.3
4 PM - 7 PM	6	20	East:	8	19	SouthEast:	3	7
7 PM - 12 MID	5	17	West:	30	70	SouthWest:	0	0
12 MID - 6 AM	8	27	Unknown:	0	0			
Unspecified	0	0						
<b>Total</b>	<b>30</b>					<b>Total</b>	<b>43</b>	
<b>Weather</b>			<b>Acc. Type</b>	<b># Veh</b>	<b>% of Total</b>	<b>Acc. Type</b>	<b># Veh</b>	<b>% of Total</b>
Clear:	15	50	Sideswipe:	5	17	Bicycle:	0	0
Cloudy:	7	23	Rear End:	4	13	Right Turn:	0	0
Fog:	0	0	Right Angle:	1	3.3	Driveway:	0	0
Rain:	4	13	Left Turn:	0	0	Backing:	0	0
Sleet:	0	0	Pedestrian:	0	0	Overtaking:	0	0
Snow:	4	13	Fixed Object:	17	57	Unknown:	2	6.7
Unknown:	0	0	Head on:	1	3.3	<b>Total</b>	<b>30</b>	
<b>Total</b>	<b>30</b>							
<b>Pavement</b>	<b>No. of Accidents</b>		<b>Accident Severity</b>		<b>No. of Accidents</b>	<b>% of Total</b>		
Dry:	16	55	Fatal:		0	0		
Muddy:	0	0	Non-Fatal Injury:		13	43		
Other:	0	0	Property damage only:		17	57		
Slush:	0	0	Non-reportable:		0	0		
Snow/Ice:	7	24	<b>Total</b>		30			
Wet:	6	21						
Unknown:	0	0	<b>Type of Vehicle</b>			<b>% of Total</b>		
<b>Total</b>	<b>29</b>		Passenger Cars:		43	98		
			Commercial Vehicles:		1	2.3		
			<b>Total</b>		44			
<b>Time of Year</b>	<b>No. of Accidents</b>		<b>Light Condition</b>		<b>No. of Accidents</b>	<b>% of Total</b>		
Winter (Dec-Feb)	13	43	Dark Road-Lighted:		16	53		
Spring (Mar-May)	5	17	Dark Road-Unlighted:		0	0		
Summer (Jun-Aug)	7	23	Dawn:		2	6.7		
Fall (Sep-Nov)	5	17	Daylight:		12	40		
<b>Total</b>	<b>30</b>		Dusk:		0	0		
			Unknown:		0	0		
			<b>Total</b>		30			

<b>Street Name:</b>	East Main St Corridor	P.I.N.	_____
<b>Route Number:</b>		Case No.	_____
<b>Location:</b>	East Main St	File	_____
<b>Milepost:</b>	University Ave	By	_____
<b>Date of Report:</b>	1/13/200	Page Number	1

Diagram: East Main  
County of Monroe  
Town of City of Rochester

PERIOD STUDIED  
From 1/1/2005  
To: 5/10/2000  
41 Months

(1) No.	(2) Date	(3) Time	C r i e t e t s y	C o o n d d	C o n d d	C t r e n e d r	(10) Apparent Contributing Factors	(11) Acc. Type	(12) Description
1019	10/2/2005	11:50	2	PDO	1	1	14,9	REnd	V1 rear-ended v2 while V2 was stopped in traffic. (4) Driver Inattention (9) Following Too Closely
1021	9/19/2006	12:03	2	PDO	1	1	18,20	Side	Vehicles turning left in adjoining lanes when v1 veered into v2. (18) Turning Improperly (20) Unsafe Lane Changing
1023	5/23/2007	13:40	2	PDO	1	1	14	Side	V1 sideswiped the parked v2. (4) Driver Inattention
1033	1/3/2006	16:20	2	PDO	1	1	269,7	RAng	V1 was allowed to enter by v2 stopped vehicles in Lanes 1 & 2 but entering lane 3 struck V2 (69) View Obstructed/Limited (7) Failure to Yield Right of Way
1034	9/9/2005	13:38	2	PDO	1	1	19	REnd	(9) Following Too Closely
1035	3/28/2006	9:10	2	Inj	1	2	1	Left	V2 in intersection when light turned red. V1 started before V2 cleared
1037	3/2/2007	22:50	2	PDO	4	1	1,18	Left	V2 turned into the path of V1 (18) Turning Improperly
1038	6/2/2007	12:05	2	Inj	1	1	14	RAng	V1 struck v2. (4) Driver Inattention
1039	4/4/2007	8:06	2	PDO	1	1	2,3,18,13	Side	V2 was sideswiped by v1. (18) Turning Improperly (13) Passing or Lane Usage Improper
1040	3/6/2007	22:11	2	PDO	4	1	4,2,7	Left	(7) Failure to Yield Right of Way
1041	3/26/2006	13:35	2	PDO	1	1	217	RAng	(17) Traffic Control Disregarded
1042	6/10/2005	13:33	2	PDO	1	1	2,24,20	Side	V1 clipped mirror on V2 while going around a third uninvolved vehicle. (4) Driver Inattention (20) Unsafe Lane Changing
1043	7/6/2005	1:16	2	PDO	1	1	2,37,17	RAng	V1 ran red light and struck V2 (7) Failure to Yield Right of Way (17) Traffic Control Disregarded
1044	9/17/2005	15:29	2	PDO	1	1	1,1,17	RAng	V1 struck V2 who had failed to stop for the red light. (17) Traffic Control Disregarded

DETAILS OF ACCIDENT HISTORY	
County of Monroe	Sear-Brown Group

Diagram:	East Main Street Name:	East Main St Corridor				
Route Number:	Location:	East Main St				
Milepost:	To:	Union Street				
Date of Report:	1/13/2000					
PERIOD STUDIED	(4)	(5)	(6)	(7)	(8)	(9)
From 1/1/2005	V	S	L	R	S	
To: 5/10/2000	e	e	g	o	u	
Months 41	h	v	h	a	r	W
	i	t	d	f	e	
	c	c	c	c	a	
	r	i	o	o	t	
	s	e	n	n	h	
	y	t	n	n	e	
	d	d	d	d	r	
						(10)

P.I.N.	_____
Case No.	_____
File	_____
By	_____
Page Number	2

(1) No.	(2) Date	(3) Time	(4) S	(5) Y	(6) d	(7) d	(8) d	(9) r	(10) f	(11) Apparent Contributing Factors	(12) Description	
											Over	(4) Driver Inattention
1045	9/26/2005	21:52	2	PDO	4	4	1	14				
1046	10/22/2005	20:06	2	Inj	4	1	2	3,17				
1047	10/25/2005	7:35	2	Inj	1	1	2	3,17			RAng	V2 ran a red light and was struck by V1 (17) Traffic Control Disregarded
1048	12/7/2005	7:45	2	PDO	1	1	2	2,26			REnd	V2 stopped quickly to avoid vehicle running a red light and was rear ended by V2 (26) Reaction to Other Uninvolved Vehicle
1049	12/27/2005	17:12	2	PDO	4	1	1	23			Back	V1 backed into V2 (3) Backing Unsafely
1050	3/27/2006	13:50	2	PDO	1	1	1	14			REnd	(4) Driver Inattention
1051	5/19/2006	—	3	PDO	1	1	2	3,17			RAng	V1 ran the red light and was struck by v2 and V3. (17) Traffic Control Disregarded
1052	8/12/2006	9:05	—	PDO	1	1	1	14			REnd	(4) Driver Inattention
1054	11/2/2006	12:33	2	Inj	1	1	1	17,17,7			RAng	V1&2 struck each other. Both drivers claimed that they had a green light. (17) Traffic Control Disregarded (17) Traffic Control Disregarded (7) Failure to Yield Right of Way
1055	1/2/2007	16:06	2	PDO	3	4	1	118			Side	V1 straight in a left turn lane and struck v2, in a left turn lane (18) Turning Improperly
1056	5/3/2007	23:35	2	PDO	4	1	1	2,2,20			Side	V1 sideswiped V2 and left the scene (2) Alcohol Involvement (20) Unsafe Lane Changing
1057	5/29/2007	18:15	2	PDO	1	1	1	4			REnd	(4) Driver Inattention
1058	6/28/2007	17:15	2	PDO	1	1	1	14			REnd	(4) Driver Inattention
1059	7/27/2007	17:16	2	PDO	1	1	1	113			Side	Both vehicles were turning left and V2 drifted into v1's lane. (13) Passing or Lane Usage Improper

**DETAILS OF  
ACCIDENT HISTORY**

Sear-Brown Group

<b>PERIOD STUDIED</b>	
From 1/1/2005	(4)
To: 5/10/2008	(5)
41 Months	(6) (7) (8) (9)

County of Monroe	Diagram: East Main Street Name: East Main St Corridor
Town of City of Rochester	Route Number: Location: East Main St Milepost: University Ave To: Union Street Date of Report: 1/13/2000

P.I.N.	Case No.
File	By
Page Number	

Street Name: East Main St Corridor

Route Number:

Location: East Main St

Milepost: University Ave To: Union Street

Date of Report: 1/13/2000

P.I.N.

Case No.

File

Page Number 3

(1) No.	(2) Date	(3) Time	V e e h i c i t n o i e s y	R S o u a r f e d d d d	L R g o h t d C C C t n n o h n n d d	S R u a r f e d d d d	Apparent Contributing Factors	(11) Acc. Type	(12) Description		
									Contributing Factors	Type	
1060	8/29/2007	13:59	2	PDO	1	4	1	17,20	Over	V1 U-turn from the right lane and turned in front of V2 (7) Failure to Yield Right of Way (20) Unsafe Lane Changing	
1061	4/22/2008	9:00	2	PDO	1	1	1	113	Side	V1 struck V2 with its trailer while they were both turning left (13) Passing or Lane Usage Improper	
1062	5/6/2008	16:02	2	PDO	1	1	1	213	Over	(13) Passing or Lane Usage Improper	
1063	5/10/2008	13:34	3	PDO	1	1	1	117,4	RAng	V1 tried to make the light and Struck V2&3 (17) Traffic Control Disregarded (4) Driver Inattention	
1068	9/8/2006	22:40	2	PDO	4	1	1	213	Over	V1 merge to right lane and struck v2 (13) Passing or Lane Usage Improper	
1071	7/2/2007	10:32	2	PDO	1	1	1	19	REnd	(9) Following Too Closely	
1072	7/2/2007	10:32	2	PDO	1	1	1	29	REnd	(9) Following Too Closely	
1074	11/20/2007	16:30	3	PDO	1	1	1	19	REnd	V3 sudden stop causing V2 to stop. V1 hit v2 which caused V2 to hit V3 (9) Following Too Closely	
1075	12/11/2007	13:00	2	PDO	1	1	2	39	REnd	(9) Following Too Closely	
1076	1/11/2008	10:02	2	PDO	1	1	2	226	Side	V1 avoiding another vehicle struck v2 who was the right lane. (26) Reaction to Other Uninvolved Vehicle	
1077	1/21/2008	19:05	2	PDO	4	1	1	213	Over	V1 drove by V2 and struck V1's mirror. (13) Passing or Lane Usage Improper	
1078	2/9/2008	13:35	2	PDO	1	1	4	24,9	REnd	V2 stopped suddenly to let a NYS Trooper by and v1 struck V2 (4) Driver Inattention (9) Following Too Closely	
1079	3/7/2008	8:30	3	Inj	1	1	2	269,7,69	Left	V1 struck V2 as it made a left turn causing it to spin out and hit a parked car (69) View Obstructed/Limited (7) Failure to Yield Right of Way (69) View Obstructed/Limited	
1081	7/12/2005	8:10	2	PDO	1	1	1	17	Left	(7) Failure to Yield Right of Way	

<b>DETAILS OF ACCIDENT HISTORY</b>
Sear-Brown Group

<b>Diagram:</b> East Main
County of Monroe
Town of City of Rochester

<b>Street Name:</b> East Main St Corridor
<b>Route Number:</b>
<b>Location:</b> East Main St
<b>Milepost:</b> University Ave
<b>To:</b> Union Street
<b>Date of Report:</b> 1/13/200

<b>P.I.N.</b> _____
<b>Case No.</b> _____
<b>File</b> _____
<b>By</b> _____
<b>Page Number</b> 4

<u>PERIOD STUDIED</u>		(4)	(5)	(6)	(7)	(8)	(9)
From 1/1/2005	9/11/2005	16:06	2	PDO	1	1	145
To: 5/10/200	41 Months	14:56	2	PDO	1	1	2 2

(1) No.	(2) Date	(3) Time	(4) S	(5) Y	(6) L	(7) R	(8) S	(9) Contributing Factors	(10) Apparent Contributing Factors	(11) Acc. Type	(12) Description
1082	9/11/2005	16:06	2	PDO	1	1	1	145		Unkn	V1's mirror struck V2 (45) Oversized Vehicle
1084	2/1/2006	14:56	2	PDO	1	1	2	2		REnd	V2 stopped and V1 tried to go around it but clipped the back of V2
1091	8/29/2007	19:27	1	PDO	1	1	1	1		FixO	V1 swerved into pole
1093	2/2/2006	1:09	1	PDO	4	1	1	12		FixO	(2) Alcohol Involvement
1094	1/17/2007	2	PDO	0	1	1	1			REnd	E. Main St. @ Union St
1095	4/14/2006	21:14	2	Inj	4	1	1	1		Unkn	E. Main St. @ Union St.
1097	1/1/2005	18:32	2	Inj	4	1	1	12		RAng	E. Main St. @ Pitkin St (2) Alcohol Involvement
1099	10/25/2005	7:35	2	Inj	1	1	2	317,17		RAng	E. Main St. @ Pitkin St (17) Traffic Control Disregarded (17) Traffic Control Disregarded
1100	5/3/2007	23:50	PDO	4	2	1	12,9			REnd	V2 stopped at red light, V1 RE v2, then backed up and sideswiped V2 as it passed it (2) Alcohol Involvement (9) Following Too Closely
1101	2/9/2007	13:45	Inj	1	2	2	29			REnd	V2 stopped at light, V1 RE V2 following too closely (9) Following Too Closely
1102	2/27/2007	9:20	PDO	1	2	1	14			REnd	V2 stopped, V1 lost control, spun around RE v2 (4) Driver Inattention
1103	2/27/2008	9:00	PDO	1	2	4	219,66			REnd	V2 stopped, V1 RE V2, unsafe speed, pavement slippery (19) Unsafe Speed (66) Pavement Slippery
1104											Add Accidents under: University Ave + Union St Corridors

**Location:** East Main St

**Town:** City of Rochester

12-Jan-09

**County:** Monroe

Time of Day	No. of Accidents	% of Total	Milepost: University Ave		To: Union Street		% of Total
			Direction	# Veh	Direction	# Veh	
6 AM - 10 AM	11	21	North:	10	9.3	NorthEast:	1 0.9
10:00 AM - 4 PM	19	37	South:	19	18	NorthWest:	1 0.9
4 PM - 7 PM	10	19	East:	21	20	SouthEast:	5 4.7
7 PM - 12 MID	10	19	West:	49	46	SouthWest:	1 0.9
12 MID - 6 AM	2	3.8	Unknown:	0	0		
Unspecified	0	0					
						Total	107
<b>Total</b>	<b>52</b>						

Weather	No. of Accidents	Acc. Type	# Veh	% of Total	Acc. Type	# Veh	% of Total
Clear:	29	Sideswipe:	9	17	Bicycle:	0	0
Cloudy:	17	Rear End:	18	33	Right Turn:	0	0
Fog:	0	Right Angle:	12	22	Driveway:	0	0
Rain:	7	Left Turn:	5	9.3	Backing:	1	1.9
Sleet:	0	Pedestrian:	0	0	Overtaking:	5	9.3
Snow:	0	Fixed Object:	2	3.7	Unknown:	2	3.7
Unknown:	0	Head on:	0	0			
<b>Total</b>	<b>53</b>				<b>Total</b>	<b>54</b>	

Pavement	No. of Accidents	Accident Severity	No. of Accidents	% of Total		
					Fatal:	Non-Fatal Injury:
Dry:	38	70	0	0		
Muddy:	0	0	10	19		
Other:	0	0	44	81		
Slush:	0	0	0	0		
Snow/Ice:	3	5.6			Total	54
Wet:	13	24				
Unknown:	0	0				
<b>Total</b>	<b>54</b>				Type of Vehicle	No. of Accidents
					Passenger Cars:	108
					Commercial Vehicles:	0
					<b>Total</b>	<b>108</b>

Time of Year	No. of Accidents	Light Condition	No. of Accidents	% of Total		
					Dark Road-Lighted:	Dark Road-Unlighted:
Winter (Dec-Feb)	15	28	12	22		
Spring (Mar-May)	16	30	0	0		
Summer (Jun-Aug)	11	20	0	0		
Fall (Sep-Nov)	12	22	40	74		
<b>Total</b>	<b>54</b>				Dawn:	
					Daylight:	
					Dusk:	
					Unknown:	
					<b>Total</b>	<b>54</b>

DETAILS OF ACCIDENT HISTORY				Diagram: University				Street Name: University Ave Corridor				
County of Monroe				Route Number:				Location: University Ave				
Town of City of Rochester								Milepost: E. Main St To: Union St				
								Date of Report: 1/13/2000				
<b>SEAR BROWN GROUP</b>												
<b>PERIOD STUDIED</b>				(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	(12)
From: 4/2/2005	To: 4/9/2008	Months: 37		V	S	L	R	S	O	H	Apparent Contributing Factors	Description
				e	e	g	o	u	a	r		
				h	v	h	a	w	f	e		
				i	t	d	c	c	t	a		
				c	r	d	c	c	c	c		
				i	e	d	o	o	o	o		
				i	t	n	n	n	n	n		
				e	s	y	n	n	n	n		
				2002	7/19/2005	13:15	PDO	1	1	24,20	Side	V1 changed lanes and struck V2 (4) Driver Inattention (20) Unsafe Lane Changing
				2003	8/15/2005	12:39	PDO	1	1	1 17	REnd	V1 struck V2 after V2 stopped for an emergency vehicle. (17) Traffic Control Disregarded
				2004	1/5/2006	13:40	PDO	1	4	2 20,13	Over	(20) Unsafe Lane Changing (13) Passing or Lane Usage Improper
				2005	1/18/2006	7:57	PDO	1	1	2 24	REnd	V1 was cut off and stopped when struck by V2 (4) Driver Inattention
				2006	6/21/2006	21:12	PDO	4	1	1 17	Over	V1 merged over and struck V2. (7) Failure to Yield Right of Way
				2007	7/20/2006	8:49	PDO	1	1	1 19	REnd	V2 stopped for pedestrians and V1 rear-ended V2. (9) Following Too Closely
				2008	8/23/2006	14:40	PDO	1	1	1 24	Bike	V2 was struck by Bicycle as v2 was turning left (4) Driver Inattention
				2009	12/29/2006	23:55	PDO	4	1	1 29	REnd	(9) Following Too Closely
				2010	2/6/2007	16:13	PDO	1	1	1 2,9	REnd	V1 stopped abruptly and V2 rear-ended it, and V3 rear ended Vehicle 2. (9) Following Too Closely
				2011	3/24/2007	18:49	Inj	1	1	2 3,9,4	REnd	(9) Following Too Closely (4) Driver Inattention
				2012	4/7/2007	22:20	PDO	4	4	2 4 18,4	Over	V1 in the left lane and went straight, v2 turned left from middle lane. V1 hit V2 on the left side. (18)
				2013	7/9/2006	12:01	PDO	1	1	1 1,17	RAng	Turning Improperly (4) Driver Inattention
				2014	1/13/2007	10:13	Inj	1	1	2 3,4,17	RAng	(17) Traffic Control Disregarded
				2015	3/3/2007	8:20	PDO	1	1	1 1,17	RAng	(4) Driver Inattention (17) Traffic Control Disregarded
												V2 ran red light and struck V1 (17) Traffic Control Disregarded

P.I.N.	_____
Case No.	_____
File	_____
By	_____
Page Number	2

Diagram:	University	Street Name:	University Ave Corridor
Route Number:		Location:	University Ave
Milepost:	E. Main St	To:	Union St
Date of Report:	1/13/2000		

<b>DETAILS OF ACCIDENT HISTORY</b>
County of Monroe
Town of City of Rochester
SearBrown Group

<b>PERIOD STUDIED</b>		
(1)	(2)	(3)
No.	Date	Time
2016	10/4/2007	14:48
2017	11/3/2007	14:25
2018	12/18/2007	21:47
2019	4/9/2008	17:28
2020	4/2/2005	22:40
2021	4/4/2007	8:00
2022		

(1) No.	(2) Date	(3) Time	(4)	(5)	(6)	(7)	(8)	(9)	(10)			(11) Apparent Contributing Factors	(12) Description
									L	R	S		
2016	10/4/2007	14:48	PDO	1	1	1	1	7				Left	(7) Failure to Yield Right of Way
2017	11/3/2007	14:25	Inj	1	1	1	1	20,7				RAng	(20) Unsafe Lane Changing (7) Failure to Yield Right of Way
2018	12/18/2007	21:47	PDO	4	1	4	1					RAng	(7) Failure to Yield Right of Way
2019	4/9/2008	17:28	PDO	1	1	1	1	17				RAng	(7) Failure to Yield Right of Way
2020	4/2/2005	22:40	Inj	4	1	1	1					Left	16648 rmp W. Main St. to NY940T E. Main St
2021	4/4/2007	8:00	PDO	1	1	2	3					Over	16648 rmp W. Main St. to NY940T E. Main St
2022													Add Accidents under: E. Main Street + Union St. Corridors

**Location:** University Ave

13-Jan-09

**Town:** City of Rochester

**County:** Monroe

			<b>Milepost:</b> E. Main St		<b>To:</b> Union St			
<b>Time of Day</b>	<b>No. of Accidents</b>	<b>% of Total</b>	<b>Direction</b>	<b># Veh</b>	<b>% of Total</b>	<b>Direction</b>	<b># Veh</b>	<b>% of Total</b>
6 AM - 10 AM	4	20	North:	25	63	NorthEast:	1	2.5
10:00 AM - 4 PM	8	40	South:	3	7.5	NorthWest:	1	2.5
4 PM - 7 PM	3	15	East:	0	0	SouthEast:	1	2.5
7 PM - 12 MID	5	25	West:	9	23	SouthWest:	0	0
12 MID - 6 AM	0	0	Unknown:	0	0			
Unspecified	0	0						
<b>Total</b>	<b>20</b>					<b>Total</b>	<b>40</b>	
<b>Weather</b>			<b>Acc. Type</b>	<b># Veh</b>	<b>% of Total</b>	<b>Acc. Type</b>	<b># Veh</b>	<b>% of Total</b>
Clear:	10	50	Sideswipe:	1	5	Bicycle:	1	5
Cloudy:	6	30	Rear End:	6	30	Right Turn:	0	0
Fog:	0	0	Right Angle:	6	30	Driveway:	0	0
Rain:	3	15	Left Turn:	2	10	Backing:	0	0
Sleet:	0	0	Pedestrian:	0	0	Overtaking:	4	20
Snow:	1	5	Fixed Object:	0	0	Unknown:	0	0
Unknown:	0	0	Head on:	0	0	<b>Total</b>	<b>20</b>	
<b>Total</b>	<b>20</b>							
<b>Pavement</b>	<b>No. of Accidents</b>		<b>Accident Severity</b>		<b>No. of Accidents</b>	<b>% of Total</b>		
Dry:	13	65	Fatal:		0	0		
Muddy:	0	0	Non-Fatal Injury:		4	20		
Other:	0	0	Property damage only:		16	80		
Slush:	0	0	Non-reportable:		0	0		
Snow/Ice:	1	5	<b>Total</b>		20			
Wet:	6	30						
Unknown:	0	0	<b>Type of Vehicle</b>		<b>No. of Accidents</b>	<b>% of Total</b>		
<b>Total</b>	<b>20</b>		Passenger Cars:		41			
			Commercial Vehicles:					
			<b>Total</b>					
<b>Time of Year</b>	<b>No. of Accidents</b>		<b>Light Condition</b>	<b>No. of Accidents</b>		<b>% of Total</b>		
Winter (Dec-Feb)	6	30	Dark Road-Lighted:	5		25		
Spring (Mar-May)	6	30	Dark Road-Unlighted:	0		0		
Summer (Jun-Aug)	6	30	Dawn:	0		0		
Fall (Sep-Nov)	2	10	Daylight:	15		75		
<b>Total</b>	<b>20</b>		Dusk:	0		0		
			Unknown:	0		0		
			<b>Total</b>	<b>20</b>				

DETAILS OF ACCIDENT HISTORY	
Sear-Brown Group	

Diagram:	East Ave/U	Street Name:	East Ave Corridor
County of Monroe		Route Number:	
Town of City of Rochester		Location:	East Ave/Union St
Milepost:		To:	Union St.
Date of Report:	1/13/2000		

P.I.N.	
Case No.	
File	
By	
Page Number	1

<u>PERIOD STUDIED</u>	
From	9/13/2000
To:	4/2/2008
Months	32

(1) No.	(2) Date	(3) Time	(4) S	(5) Y	(6) Contributing Factors	(7) Apparent Contributing Factors	(8) Acc. Type	(9)
3011	8/5/2006	2:38	PDO	4	1 1	1 1 17	Left	(17) Traffic Control Disregarded
3012	7/21/2006	20:01	Inj	1	1 1	1 1 1	REnd	V1 stopped abruptly rear ended by V2.
3018	9/13/2005	8:06	PDO	1	1 1	1 14,18	Right	V1 was turning right and turned into V2 (4) Driver Inattention (18) Turning Improperly
3019	9/15/2005	18:03	PDO	1	1 1	1 17,4	Unkn	V3 stopped to let V1 into traffic, V2 struck V1 making a left (7) Failure to Yield Right of Way (4) Driver Inattention
3020	9/16/2005	22:10	PDO	4	1 1	1 1	RAng	
3021	10/2/2005	4:00	PDO	4	1 1	1 14	RAng	V1 went the wrong way on N. Union, entered intersection and struck V2 (4) Driver Inattention
3022	1/6/2006	22:45	PDO	4	1 4	4	RAng	
3023	6/3/2006	20:59	Inj	4	1 2	3 64,7	Left	(64) Obstruction/Debris (7) Failure to Yield Right of Way
3024	6/5/2006	11:53	Inj	1	1 1	1 1	RAng	
3025	6/7/2006	20:10	PDO	1	1 1	1 17	RAng	(17) Traffic Control Disregarded
3026	8/24/2006	15:43	PDO	1	1 1	1 17	RAng	(17) Traffic Control Disregarded
3027	8/22/2006	16:21	PDO	1	1 1	2 7	Right	(7) Failure to Yield Right of Way
3028	11/20/2006	10:15	PDO	1	1 2	2 17	RAng	(17) Traffic Control Disregarded
3029	12/17/2006	20:14	PDO	4	1 2	2 17	RAng	(17) Traffic Control Disregarded

**DETAILS OF  
ACCIDENT HISTORY**

---

SearBrown Group

Diagram: East Ave/U  
County of Monroe  
Town of City of Rochester

Street Name: East Ave Corridor  
Route Number:  
Location: East Ave/Union St  
Milepost:  
Date of Report: 1/13/2000

P.I.N. \_\_\_\_\_  
Case No. \_\_\_\_\_  
File \_\_\_\_\_  
By \_\_\_\_\_  
Page Number 2

<b>PERIOD STUDIED</b>	
From 9/13/2000	(4) (5)
To: 4/2/2008	(6) (7) (8) (9)

32 Months

<b>PERIOD STUDIED</b>	
From 9/13/2000	(4) (5)
To: 4/2/2008	(6) (7) (8) (9)

32 Months

(1) No.	(2) Date	(3) Time	V e e h i c i i e t n n h i c i e s y	L S g o u r f e d d d d d d d d	R S o u r f e d d d d d d d d	Apparent Contributing Factors	(10) h o o o o o o o h o o o o h a r f e a t c c c c t	(11) Acc. Type	(12) Description	
									(1) No.	(2) Date
3030	12/23/2006	10:23	Inj	1	1	1	2,17	RAng	V1 hit V2, force V2 over the curb , hit parked V3&4 (17) Traffic Control Disregarded	
3031	1/4/2007	11:21	Inj	1	1	1	117,7	RAng	V1 & 2 collided and caused V1 to spin out and strike parked V3 & 4. (17) Traffic Control Disregarded	
3032	1/12/2007	18:12	PDO	4	1	2	3,7,69	RAng	(7) Failure to Yield Right of Way (69) View Obstructed/Limited	
3033	5/8/2007	11:51	PDO	1	1	1	117,17	RAng	(7) Failure to Yield Right of Way (17) Traffic Control Disregarded	
3034	4/2/2008	20:23	PDO	3	1	1	17,69	Left	V2 it out of drive, view obstructed by parked veh; was struck by V1 westbound (7) Failure to Yield Right of Way (69) View Obstructed/Limited	
3035	11/2/2005	21:57	PDO	4	1	1	118	Left	East Ave @ Union St (18) Turning Improperly	
3036	4/22/2006	21:57	PDO	4	1	1	1,17	RAng	East Ave @ Union St (17) Traffic Control Disregarded	
3037	6/7/2006	20:10	PDO	1	1	1	117	RAng	East Ave @ N. Union St (17) Traffic Control Disregarded	
3038									Add accidents found: Pittkin St. corridor	

**Location:** East Ave/Union

**Town:** City of Rochester

13-Jan-09

**County:** Monroe

			<b>Milepost:</b>		<b>To:</b> Union St.			
<b>Time of Day</b>	<b>No. of Accidents</b>	<b>% of Total</b>	<b>Direction</b>	<b># Veh</b>	<b>% of Total</b>	<b>Direction</b>	<b># Veh</b>	<b>% of Total</b>
6 AM - 10 AM	1	4.5	North:	17	34	NorthEast:	1	2
10:00 AM - 4 PM	6	27	South:	5	10	NorthWest:	1	2
4 PM - 7 PM	3	14	East:	12	24	SouthEast:	0	0
7 PM - 12 MID	10	45	West:	14	28	SouthWest:	0	0
12 MID - 6 AM	2	9.1	Unknown:	0	0			
Unspecified	0	0						
<b>Total</b>	<b>22</b>					<b>Total</b>	<b>50</b>	
<b>Weather</b> No. of Accidents			<b>Acc. Type</b>	<b># Veh</b>	<b>% of Total</b>	<b>Acc. Type</b>	<b># Veh</b>	<b>% of Total</b>
Clear:	15	68	Sideswipe:	0	0	Bicycle:	0	0
Cloudy:	4	18	Rear End:	1	4.5	Right Turn:	2	9.1
Fog:	0	0	Right Angle:	14	64	Driveway:	0	0
Rain:	2	9.1	Left Turn:	4	18	Backing:	0	0
Sleet:	0	0	Pedestrian:	0	0	Overtaking:	0	0
Snow:	1	4.5	Fixed Object:	0	0	Unknown:	1	4.5
Unknown:	0	0	Head on:	0	0	<b>Total</b>	<b>22</b>	
<b>Total</b>	<b>22</b>							
<b>Pavement</b>	<b>No. of Accidents</b>		<b>Accident Severity</b>		<b>No. of Accidents</b>	<b>% of Total</b>		
Dry:	17	77	Fatal:		0	0		
Muddy:	0	0	Non-Fatal Injury:		5	23		
Other:	0	0	Property damage only:		17	77		
Slush:	0	0	Non-reportable:		0	0		
Snow/Ice:	1	4.5	<b>Total</b>		22			
Wet:	4	18						
Unknown:	0	0	<b>Type of Vehicle</b>			<b>% of Total</b>		
<b>Total</b>	<b>22</b>		Passenger Cars:			50		
			Commercial Vehicles:			3		
			<b>Total</b>			53		
<b>Time of Year</b>	<b>No. of Accidents</b>		<b>Light Condition</b>		<b>No. of Accidents</b>	<b>% of Total</b>		
Winter (Dec-Feb)	5	23	Dark Road-Lighted:		9	41		
Spring (Mar-May)	3	14	Dark Road-Unlighted:		0	0		
Summer (Jun-Aug)	8	36	Dawn:		0	0		
Fall (Sep-Nov)	6	27	Daylight:		12	55		
<b>Total</b>	<b>22</b>		Dusk:		1	4.5		
			Unknown:		0	0		
			<b>Total</b>		<b>22</b>			

**DETAILS OF  
ACCIDENT HISTORY**

---

Sear-Brown Group

Diagram: Union St.  
County of Monroe  
Town of City of Rochester

Diagram: Union St.			Street Name: Union St. Corridor		
Route Number:			Location: Union St.		
			Milepost: S. Union St To: E. Main St		
			Date of Report: 1/13/200		
			P.I.N. _____ Case No. _____ File _____ By _____ Page Number 1		

<b>PERIOD STUDIED</b>			
From	To:	(4)	(5)
3/17/200	5/31/200	V	S
39 Months		L R S	G O U H A R W

(1) No.	(2) Date	(3) Time	(4) Contributing Factors	(5) Apparent Acc. Type	(12) Description		
					(6)	(7)	(8)
4001	10/28/2006	2:27	PDO	4 1 2 320	Over	V1 ENTERED V2'S LANE AND STRUCK V2 (20) Unsafe Lane Changing	
4002	7/23/2006	8:48	PDO	1 1 1 218	Unkn	V1 TURNED IN FRON OF V2 IN AN ATTEMPT TO TURN INTO A DRIVEWAY (18) Turning Improperly	
4004	12/16/2006	0:50	PDO	4 1 1 118	Drv	V1 EXITING LOT STRUCK V2 ENTERING PARKING LOT (18) Turning Improperly	
4005	6/13/2006	16:15	PDO	1 1 1 14	FixO	V1 STRUCK PARKING SIGN (4) Driver Inattention	
4006	6/11/2006	0:00	Inj	4 1 1 126	Rght	V1 (MOTORCYCLE) STOPPED TO turn RIGHT INTO PARKING LOT (26) Reaction to Other Uninvolved Vehicle	
4008	5/15/2007	8:10	PDO	1 1 2 2	RAng	V2 STRUCK V1 AS V1 WAS MAKING LEFT TURN	
4009	6/12/2007	8:47	PDO	1 1 1 17	RAng	V1 FAILED TO STOP FOR RED LIGHT & STRUCK V2 (7) Failure to Yield Right of Way	
4010	7/28/2007	2:20	PDO	4 1 1 113,17	Left	V2 TURNED LEFT IN FRONT OF V1. V1 STRUCK V2 (13) Passing or Lane Usage Improper (17) Traffic Control Disregarded	
4011	11/30/2007	23:45	PDO	4 1 1 218,20	Left	V2 TURNED LEFT IN FRONT OF V1, V1 STRUCK V2 (18) Turning Improperly (20) Unsafe Lane Changing	
4012	12/1/2007	13:36	PDO	1 1 1 17	RAng	V2 RAN RED LIGHT & STRUCK V1. V2 FLED SCENE (7) Failure to Yield Right of Way	
4013	4/20/2008	10:54	PDO	1 1 1 217	RAng	V1 WENT THRU RED LIGHT & STRUCK V2 (17) Traffic Control Disregarded	
4015	10/9/2006	21:00	PDO	4 1 1 2	Back	V1 BACKED INTO V2 WHILE V2 WAS PARKED	
4016	11/3/2006	22:34	PDO	4 1 1 213	Left	V2 TURN LEFT, V1 STRUCK V2 BOTH IN LEFT LANES (13) Passing or Lane Usage Improper	
4018	5/3/2007	17:25	PDO	1 4 1 26	FixO	V1 SWERVED TO AVOID V2, STRUCK CURB (26) Reaction to Other Uninvolved Vehicle	

<b>DETAILS OF ACCIDENT HISTORY</b>
Sear-Brown Group

<b>Diagram:</b> Union St.
<b>County of Monroe</b>
<b>Town of City of Rochester</b>

<b>Street Name:</b> Union St. Corridor
<b>Route Number:</b>
<b>Location:</b> Union St.
<b>Milepost:</b> S. Union St
<b>To:</b> E. Main St
<b>Date of Report:</b> 1/13/200

<b>P.I.N.</b> _____
<b>Case No.</b> _____
<b>File</b> _____
<b>By</b> _____
<b>Page Number</b> 2

<u>PERIOD STUDIED</u>	
From 3/17/200	(4) (5)
To: 5/31/200	(6) (7) (8) (9)
39 Months	V S L R S

<u>PERIOD STUDIED</u>	
From 3/17/200	(4) (5)
To: 5/31/200	(6) (7) (8) (9)

<u>PERIOD STUDIED</u>	
From 3/17/200	(4) (5)
To: 5/31/200	(6) (7) (8) (9)

(1) No.	(2) Date	(3) Time	Contributing Factors	Apparent Factors	(11) Acc. Type	(12) Description	
						Side	Back
4019	5/5/2006	8:45	PDO	1 1 1 14	Side	V1 STARTED TO SWITCH LANES & SIDESWIPPED V2 (4) Driver Inattention	
4021	3/31/2006	11:07	Inj	1 1 1 19	REnd	V2 STOPPED & V1 REAR-ENDED V2 (9) Following Too Closely	
4022	10/30/2005	1:30	PDO	4 1 1 14	Back	V1 WAS PARKED & V2 WAS STOPPED AT CORNER. V1 BACKED INTO V2 (4) Driver Inattention	
4023	12/10/2005	17:18	PDO	4 1 1 14	REnd	V2 STOPPED & TRAFFIC LIGHT & V1 REAR-ENDED V2 (4) Driver Inattention	
4025	5/31/2006	23:50	PDO	4 1 1 24	Side	V2 PARKED. V1 TURNED RIGHT INTO THE PARK LOT STRUCK V2 (4) Driver Inattention	
4026	1/22/2008	10:52	PDO	1 1 1 23	Back	V1 BACKING INTO DRIVEWAY & STRUCK V2 STOPPED IN TRAFFIC (3) Backing Unsafely	
4027	10/12/2007	14:32	Inj	1 1 1 14	REnd	V1 (RTS BUS) REAR-ENDED V2. (4) Driver Inattention	
4028	8/12/2007	2:41	PDO	4 1 1 17,17	RAng	V2 STRUCK BY V1 WHICH THEN FLED SCENE (7) Failure to Yield Right of Way (17) Traffic Control Disregarded	
4029	2/16/2007	2:25	PDO	4 1 4 42,19	Unkn	V1 HIGH RATE OF SPEED, SLID ICY ROAD, CURB (2) Alcohol Involvement (19) Unsafe Speed	
4031	5/20/2006	1:02	PDO	4 1 2 39,26	REnd	V2 AVOID UNKNOWN VEHICLE, REAR-ENDED BY V1 (9) Following Too Closely (26) Reaction to Other Uninvolved Vehicle	
4032	11/17/2005	0:30	PDO	4 1 1 22	FixO	V1 CHANGED LANES & struck v2 (20) Unsafe Lane Changing (7) Failure to Yield Right of Way	
4033	4/4/2008	8:40	PDO	1 1 2 320,7	Side	V1 SWERVED OFF ROAD, OVER CURB,STRUCK TREE (2) Alcohol Involvement	
4035	6/9/2006	14:00	PDO	1 1 1 220	Left	V1 WAS CHANGING LANES WHEN IT STRUCK V2 (20) Unsafe Lane Changing	
4036	8/26/2005	1:49	PDO	1 1 1 22,3	Left	V1 BACKING DOWN STREET INTO V2. (2) Alcohol Involvement (3) Backing Unsafely	

<b>DETAILS OF ACCIDENT HISTORY</b>
County of Monroe
Town of City of Rochester
SearBrown Group

Diagram: Union St.	Street Name: Union St. Corridor
Route Number:	Location: Union St.
Milepost: S. Union St	To: E. Main St
Date of Report: 1/13/2000	

<b>PERIOD STUDIED</b>	From 3/17/2000	To: 5/31/2000	Months 39				
(4)	(5)	(6)	(7) (8) (9)				
V	S	L	R S				
e	g	o	u				
h	a	r	w				
i	t	f	e				
c	c	c	a				
i	o	o	h				
e	n	n					
t	n	n					
s	y	d					
p	d	d					
4037	4/29/2006	1:34	PDO	4	1	1	12,19

P.I.N. _____
Case No. _____
File _____
By _____
Page Number 3

(1) No.	(2) Date	(3) Time	(4) Contributing Factors	(5) Apparent Contributing Factors	(6) Acc. Type	(7) Description
4038	3/11/2008	15:43	PDO	1	1	Left V1 TURNED LEFT, WRONG WAY, ONE WAY ST. SIDESWIPPING V2 & V3 (2) Alcohol Involvement (19)
4041	5/31/2008	4:32	PDO	4	4	REnd V2 PARKED WHEN V1 SWERVED V1 REAR-ENDED V2 (9) Following Too Closely Unsafe Speed
4043	3/31/2006	11:07	Inj	1	1	RAng V1 VEHICLE WOULD NOT TURN & STRUCK CURB (5) Driver Inexperience
4044	1/2/2006	22:55	PDO	4	1	REnd V1 EXTENDED INNER LOOP & STRUCK V2 (9) Following Too Closely
4045	4/5/2008	2:45	PDO	4	1	REnd V1 REAR-ENDED V2 PARKED. (2) Alcohol Involvement (47) Tire Failure/Inadequate
4046	3/15/2008	13:50	PDO	1	1	RAng V1 ATTEMPTED TO STOP & REAR-ENDED V2 (9) Following Too Closely (66) Pavement Slippery
4047	12/12/2007	17:59	PDO	4	1	RAng V2 ENTERED INTERSECTION & WAS STRUCK BY V1.
4049	2/22/2008	19:15	PDO	4	1	REnd V2 STOPPED TO AVOID ANOTHER V & WAS REAR-ENDED BY V1 (26) Reaction to Other Uninvolved Vehicle
4050	3/17/2005	23:41	PDO	4	1	REnd V2 STOPPED AT RED LIGHT AND WAS REAR-ENDED BY V1. (4) Driver Inattention
4051	3/31/2006	11:07	Inj	1	1	Back V1 TURNED THE WRONG WAY ONTO ONE-WAY STREET, THEN BACKED UP & STRUCK V2 (2) Alcohol Involvement (3) Backing Unsafely
4052						S. Union St @ Griffith St (9) Following Too Closely Add accidents found: E. Main+ University+East Ave+Broad+Monroe corridors

**Location:** Union St.

**Town:** City of Rochester

13-Jan-09

**County:** Monroe

**Milepost:** S. Union St

**To:** E. Main St

Time of Day	No. of Accidents	% of Total	Direction	# Veh	% of Total	Direction	# Veh	% of Total
6 AM - 10 AM	5	13	North:	41	56	NorthEast:	4	5.5
10:00 AM - 4 PM	10	26	South:	9	12	NorthWest:	5	6.8
4 PM - 7 PM	4	10	East:	6	8.2	SouthEast:	2	2.7
7 PM - 12 MID	7	18	West:	6	8.2	SouthWest:	0	0
12 MID - 6 AM	13	33	Unknown:	0	0			
Unspecified	0	0				Total	73	
<b>Total</b>	<b>39</b>							

Weather	No. of Accidents	Acc. Type	# Veh	% of Total	Acc. Type	# Veh	% of Total
Clear:	19	Sideswipe:	3	7.7	Bicycle:	0	0
Cloudy:	15	Rear End:	11	28	Right Turn:	1	2.6
Fog:	0	Right Angle:	7	18	Driveway:	1	2.6
Rain:	3	Left Turn:	6	15	Backing:	4	10
Sleet:	0	Pedestrian:	0	0	Overtaking:	1	2.6
Snow:	2	Fixed Object:	3	7.7	Unknown:	2	5.1
Unknown:	0	Head on:	0	0	Total	39	
<b>Total</b>	<b>39</b>						

Pavement	No. of Accidents	Accident Severity	No. of Accidents	% of Total
Dry:	28	Fatal:	0	0
Muddy:	0	Non-Fatal Injury:	5	13
Other:	0	Property damage only:	34	87
Slush:	1	Non-reportable:	0	0
Snow/Ice:	1	<b>Total</b>	<b>39</b>	
Wet:	8			
Unknown:	0			
<b>Total</b>	<b>38</b>			

Type of Vehicle	No. of Accidents	% of Total
Passenger Cars:	73	
Commercial Vehicles:		

**Total**

Time of Year	No. of Accidents	Light Condition	No. of Accidents	% of Total
Winter (Dec-Feb)	8	Dark Road-Lighted:	21	54
Spring (Mar-May)	16	Dark Road-Unlighted:	0	0
Summer (Jun-Aug)	8	Dawn:	0	0
Fall (Sep-Nov)	7	Daylight:	18	46
<b>Total</b>	<b>39</b>	Dusk:	0	0
		Unknown:	0	0
		<b>Total</b>	<b>39</b>	

**DETAILS OF  
ACCIDENT HISTORY**

Diagram: Monroe Av  
 County of Monroe  
 Town of City of Rochester  
 SearBrown Group

Street Name:	Monroe Ave Corridor
Route Number:	
Location:	Monroe Ave
Milepost:	Chestnut
To:	Alexander St.
Date of Report:	1/13/2000

P.I.N.	
Case No.	
File	
By	
Page Number	1

<b>PERIOD STUDIED</b>	
From	1/4/2005
To:	5/28/2000
41 Months	

(1) No.	(2) Date	(3) Time	(4) (5)	(6)	(7)	(8)	(9)
5001	5/18/2006	13:44	PDO	1	1	2	27
5002	7/8/2006	12:22	PDO	1	1	1	19
5003	11/7/2007	22:45	PDO	4	1	1	217
5004	5/28/2008	22:59	PDO	4	1	1	17,18
5005	6/3/2006	19:52	Inj	1	1	2	217
5006	1/4/2005	10:15	PDO	1	1	1	24,7
5007	6/22/2006	8:48	PDO	1	1	1	24
5008	7/28/2006	23:05	Inj	4	1	1	14
5009	7/5/2005	15:00	PDO	1	1	2	27
5010	12/31/2005	19:43	Inj	4	1	1	14,7
5011	9/25/2005	15:21	PDO	1	1	1	117,7
5012	12/22/2005	0:06	PDO	4	1	2	218,69
5013	2/24/2006	9:02	PDO	1	1	2	27
5014	6/22/2007	17:51	PDO	1	1	1	

(1) No.	(2) Date	(3) Time	(4) (5)	(6) (7)	(8) (9)	(10)	(11) Apparent Contributing Factors	(12) Description	
5001	5/18/2006	13:44	PDO	1	1	2	27	RAng	V1 WENT THRU RED LIGHT & STRUCK V2 (7) Failure to Yield Right of Way
5002	7/8/2006	12:22	PDO	1	1	1	19	REnd	V2 STOPPED IN TRAFFIC & WAS REAR-ENDED BY V1 (9) Following Too Closely
5003	11/7/2007	22:45	PDO	4	1	1	217	RAng	V1 WENT THRU A RED LIGHT & WAS STRUCK BY V2 (17) Traffic Control Disregarded
5004	5/28/2008	22:59	PDO	4	1	1	17,18	RAng	V1 MAKE A WRONG TURN ON A ONE WAY ST. V1 THEN MADE A U-TURN & STRUCK V2 (7) Failure to Yield Right of Way (18) Turning Improperly
5005	6/3/2006	19:52	Inj	1	1	2	217	RAng	V2 WENT THRU RED LIGHT & WAS STRUCK BY V1. V2 THEN STRUCK V3 (17) Traffic Control Disregarded
5006	1/4/2005	10:15	PDO	1	1	1	24,7	RAng	V2 ATTEMPTED TO MAKE A LEFT TURN & WAS STRUCK BY V1 (4) Driver Inattention (7) Failure to Yield Right of Way
5007	6/22/2006	8:48	PDO	1	1	1	24	REnd	V2 STOPPED, V1 LIGHT TURN GREEN & THOUGHT V2 HAD STARTED TO MOVE (4) Driver Inattention
5008	7/28/2006	23:05	Inj	4	1	1	14	REnd	V2 STOPPED TO MAKE A LEFT TURN WHEN V1 REAR-ENDED V2 (4) Driver Inattention
5009	7/5/2005	15:00	PDO	1	1	2	27	Side	V1 ATTEMPTED TO ENTER TRAFFIC & STRUCK V2 (7) Failure to Yield Right of Way
5010	12/31/2005	19:43	Inj	4	1	1	14,7	REnd	V2 STOPPED TO turn LEFT, V1 REAR-ENDED V2 (4) Driver Inattention (7) Failure to Yield Right of Way
5011	9/25/2005	15:21	PDO	1	1	1	117,7	RAng	V2 ran A RED LIGHT & STRUCK BY V1 (17) Traffic Control Disregarded (7) Failure to Yield Right of Way
5012	12/22/2005	0:06	PDO	4	1	2	218,69	Dry	V1 EXITED PARKING LOT INTO PATH OF V2 (18) Turning Improperly (69) View Obstructed/Limited
5013	2/24/2006	9:02	PDO	1	1	2	27	Rght	V2 TURNED IN FRONT OF V1 & WAS STRUCK BY V1 (7) Failure to Yield Right of Way
5014	6/22/2007	17:51	PDO	1	1	1		Rght	V1 TURNED RIGHT & STRUCK PARKED V2, PUSHING IT INTO V3

DETAILS OF ACCIDENT HISTORY	
Sear-Brown Group	

Diagram:	Monroe Av
County of Monroe	Route Number:
Town of City of Rochester	Location: Monroe Ave
Milepost: Chestnut	To: Alexander St.

Diagram:	Monroe Ave Corridor
Route Number:	
Location:	Monroe Ave
Milepost:	Chestnut
Date of Report:	1/13/200

P.I.N.	
Case No.	
File	
By	
Page Number	2

<u>PERIOD STUDIED</u>	
From	To:
5/28/2005	5/28/2000
Months	41

(4) (5) (6) (7) (8) (9)

V S L R S

e e g o u

h v h a r w

i e t d f e

c r C C C t

i i o o o h

e t n n e h

s y d d r

(10)

(1) (2) (3) (4) (5) (6) (7) (8) (9)

No. Date Time Contributing Factors

Acc. Type

REnd

V1 REAR-ENDED V2 (9) Following Too Closely

(12)

Description

V1 REAR-ENDED V2 (26) Reaction to Other Uninvolved Vehicle (26) Reaction to Other Uninvolved

Vehicle

V1 PULLED INTO TRAFFIC FROM CURB & STRUCK V2 (7) Failure to Yield Right of Way

Side

V2 PARKED , STRUCK BY ANOTHER VEHICLE

Side

V1 (UNKNOWN) SIDESWIPE V2 & V3 AS both PARKED (13) Passing or Lane Usage Improper

V2 SLOWED FOR TRAFFIC, V1 REAR-ENDED V2. (9) Following Too Closely (42) Brakes Detective

REnd

V2 SLOWED FOR TRAFFIC, V1 REAR-ENDED V2. (9) Following Too Closely (42) Brakes Detective

Right

V1 WRONG WAY-ONE WAY ST., TURNED RIGHT & STRUCK PEDESTRIAN (4) Driver Inattention

REnd

V2 STOPPED IN TRAFFIC & WAS REAR-ENDED BY V1 (9) Following Too Closely

REnd

V2 PARKED. V1 REAR-ENDED V2, THEN STRUCK SIGN & WALL (2) Alcohol Involvement (13) Passing or Lane Usage Improper

REnd

V2 STOPPED FOR LIGHT WHEN LIGHT TURNED GREEN, V1 REAR-ENDED V2 (9) Following Too Closely

Right

V2 PARKED. V1 STRUCK V2 & FLED SCENE.

REnd

V1 OVER CURB & STRUCK TREE

FixO

V1 PULLED FROM CURB INTO TRAFFIC & STRUCK V2 (7) Failure to Yield Right of Way

Right

DETAILS OF ACCIDENT HISTORY	
County of Monroe	Monroe Av
Sear-Brown Group	

Diagram:	Monroe Av	Street Name:	Monroe Ave Corridor
Route Number:		Location:	Monroe Ave
Milepost:	Chestnut	To:	Alexander St.
Date of Report:	1/13/2000		

P.I.N.	
Case No.	
File	
By	
Page Number	3

PERIOD STUDIED	
From	To:
1/4/2005 41 Months	5/28/2000

(1) No.	(2) Date	(3) Time	(4)	(5)	(6)	(7)	(8)	(9)
5034	2/18/2007	7:30	Inj	1	1	166		Unkn
5035	5/25/2007	9:58	Inj	1	1	17,7		RAng
5036	4/8/2007	19:06	PDO	1	1	260,13		V1 STRUCK V2 WHICH WAS IN THE INTERSECTION. (7) Failure to Yield Right of Way
5037	8/20/2007	14:13	PDO	1	1	3,17		V1 STOPPED MAKE A LEFT TURN. V2 PASS V1 ON LEFT. V1 THEN STRUCK V2 (60) Other Vehicular (13) Passing or Lane Usage Improper
5038	8/17/2007	17:26	PDO	1	1	3,9,66		V2 STOPPED, WHEN LIGHT CHANGED V2 ENTERED INTERSECTION & STRUCK BY V1 (17) Traffic Control Disregarded
5040	3/19/2006	2:30	PDO	4	4	1	113	REnd
5041	7/3/2006	1:56	Fat	4	4	1	1	FixO
5042	9/5/2006	20:08	Inj	4	1	1	2,17	V1 (MOTORCYCLE) LOST CONTROL & HIT CURB, LIGHT POLE
5044	9/19/2006	10:07	PDO	1	1	1	117	V1 WENT THRU A RED LIGHT & STRUCK V2 (17) Traffic Control Disregarded
5047	12/27/2005	17:34	Inj	4	1	1	2,7	Left
5048	10/26/2007	15:54	Inj	1	1	2	3	REnd
5049	12/3/2007	11:40	Inj	1	1	2	4,4,4	RAng
5051	3/16/2007	21:20	PDO	4	1	4	4,18,60	REnd
5052	5/30/2006	11:22	Inj	1	1	1	1,14	Bike

<b>DETAILS OF ACCIDENT HISTORY</b>
County of Monroe
Town of City of Rochester
Sear Brown Group

Diagram: Monroe Av	Street Name: Monroe Ave Corridor
Route Number:	Location: Monroe Ave
	Milepost: Chestnut
	To: Alexander St.
	Date of Report: 1/13/2000
<b>PERIOD STUDIED</b>	(4) (5) (6) (7) (8) (9)
From 1/4/2005	V S L R S
To: 5/28/2000	e e g o u
41 Months	h e h a r
	v t d f e
	i e c c a
	c r c c t
	i o o h
	e t n n e
	s d d r
	y d d r

(1) No.	(2) Date	(3) Time	(10) Apparent Contributing Factors	(11) Acc. Type	(12) Description
5053	5/21/2007	15:00	PDO	1 1 1 14.7	REnd V1 stopped at signal then drove forward and struck V2, inattention, failure to yield (4) Driver Inattention (7) Failure to Yield Right of Way
5054	11/3/2005	0:15	PDO	4 1 1 14	H-On V1 struck median and sign post, driver inattention (4) Driver Inattention
5055	7/4/2006	23:14	PDO	4 1 1 142	REnd V1 rear ended V2 who was stopped at light. V1 states breaks defective (42) Brakes Defective
5056					Additional Accidents on Union Street summary

**Location:** Monroe Ave

**Town:** City of Rochester

13-Jan-09

**County:** Monroe

			Milepost: Chestnut		To: Alexander St.			
Time of Day	No. of Accidents	% of Total	Direction	# Veh	% of Total	Direction	# Veh	% of Total
6 AM - 10 AM	4	9.1	North:	9	11	NorthEast:	2	2.4
10:00 AM - 4 PM	17	39	South:	13	16	NorthWest:	4	4.9
4 PM - 7 PM	5	11	East:	39	48	SouthEast:	2	2.4
7 PM - 12 MID	9	20	West:	12	15	SouthWest:	1	1.2
12 MID - 6 AM	9	20	Unknown:	0	0			
Unspecified	0	0						
Total	44					Total	82	
Weather No. of Accidents			Acc. Type # Veh		% of Total	Acc. Type # Veh		% of Total
Clear:	22	50	Sideswipe:	5	11	Bicycle:	1	2.2
Cloudy:	15	34	Rear End:	17	38	Right Turn:	4	8.9
Fog:	0	0	Right Angle:	11	24	Driveway:	1	2.2
Rain:	5	11	Left Turn:	1	2.2	Backing:	0	0
Sleet:	0	0	Pedestrian:	0	0	Overtaking:	0	0
Snow:	2	4.5	Fixed Object:	3	6.7	Unknown:	1	2.2
Unknown:	0	0	Head on:	1	2.2	Total	45	
Total	44							
Pavement No. of Accidents	Accident Severity		No. of Accidents		% of Total			
Dry:	30	68	Fatal:	1	2.2			
Muddy:	0	0	Non-Fatal Injury:	14	31			
Other:	0	0	Property damage only:	30	67			
Slush:	0	0	Non-reportable:	0	0			
Snow/Ice:	1	2.3	Total	45				
Wet:	13	30	Type of Vehicle		No. of Accidents		% of Total	
Unknown:	0	0	Passenger Cars:		87			
Total	44		Commercial Vehicles:					
			Total					
Time of Year No. of Accidents	Light Condition		No. of Accidents		% of Total			
Winter (Dec-Feb)	9	20	Dark Road-Lighted:	17	39			
Spring (Mar-May)	13	29	Dark Road-Unlighted:	0	0			
Summer (Jun-Aug)	14	31	Dawn:	0	0			
Fall (Sep-Nov)	9	20	Daylight:	27	61			
Total	45		Dusk:	0	0			
			Unknown:	0	0			
			Total	44				

DETAILS OF ACCIDENT HISTORY	
Sear-Brown Group	

Diagram: East Broad	
County of Monroe	
Town of City of Rochester	

Street Name: E. Broad St Corridor	
Route Number:	
Location: East Broad St	
Milepost: Savannah St	To: Union St
Date of Report: 1/13/2000	

P.I.N.	_____
Case No.	_____
File	_____
By	_____
Page Number	1

(1) No.	(2) Date	(3) Time	(4) Contributing Factors	(5) Acc.	(6) Type	(7) (8) (9)		(10) Acc.	(11) Type	(12) Description
						(10)	(11)			
7004	5/4/2007	4:05	PDO	4	1	1	117	FixO	V1 TURNED LEFT & DROVE OVER MEDIAN & SIGN. (17) Traffic Control Disregarded	
7005	11/4/2006	23:39	PDO	4	1	1	113	FixO	V1 FAILED TO STOP AT STOP SIGN, WENT ACROSS INTERSECTION & HIT THE FIRE HYDRANT (13) Passing or Lane Usage Improper	
7006	10/23/2005	14:05	PDO	1	1	2	3,4,20	Side	V1 SIDESWIPE V2. V2 DROVE OVER MEDIAN & OVER A STREET SIGN (4) Driver Inattention (20) Unsafe Lane Changing	
7007	2/19/2006	2:55	PDO	4	1	4	166	Unkn	V1 SLID ON BLACK ICE INTO CURB (66) Pavement Slippery	
7008	10/15/2007	14:05	PDO	1	1	1	117,17	RAng	(17) Traffic Control Disregarded (17) Traffic Control Disregarded	
7009	5/23/2008	12:40	PDO	1	1	1	117,13	Left	V1 making left out of lot went wrong way down broad st hit v2 going EB (17) Traffic Control Disregarded (13) Passing or Lane Usage Improper	
7010									Add accidents found: Pitkin St + Union St Corridors	

**Location:** East Broad St

**Town:** City of Rochester

13-Jan-09

**County:** Monroe

**Milepost:** Savanah St

**To:** Union St

Time of Day	No. of Accidents	% of Total	Direction	# Veh	% of Total	Direction	# Veh	% of Total
6 AM - 10 AM	0	0	North:	1	11	NorthEast:	0	0
10:00 AM - 4 PM	3	50	South:	1	11	NorthWest:	0	0
4 PM - 7 PM	0	0	East:	5	56	SouthEast:	0	0
7 PM - 12 MID	1	17	West:	2	22	SouthWest:	0	0
12 MID - 6 AM	2	33	Unknown:	0	0			
Unspecified	0	0						
<b>Total</b>	<b>6</b>					<b>Total</b>	<b>9</b>	

Weather	No. of Accidents	Acc. Type	# Veh	% of Total	Acc. Type	# Veh	% of Total
Clear:	5	Sideswipe:	1	17	Bicycle:	0	0
Cloudy:	0	Rear End:	0	0	Right Turn:	0	0
Fog:	0	Right Angle:	1	17	Driveway:	0	0
Rain:	1	Left Turn:	1	17	Backing:	0	0
Sleet:	0	Pedestrian:	0	0	Overtaking:	0	0
Snow:	0	Fixed Object:	2	33	Unknown:	1	17
Unknown:	0	Head on:	0	0			
<b>Total</b>	<b>6</b>				<b>Total</b>	<b>6</b>	

Pavement	No. of Accidents	Accident Severity	No. of Accidents	% of Total
Dry:	4	Fatal:	0	0
Muddy:	0	Non-Fatal Injury:	0	0
Other:	0	Property damage only:	6	100
Slush:	0	Non-reportable:	0	0
Snow/Ice:	1	<b>Total</b>	<b>6</b>	
Wet:	1			
Unknown:	0	Type of Vehicle	No. of Accidents	% of Total
<b>Total</b>	<b>6</b>	Passenger Cars:	<b>9</b>	
		Commercial Vehicles:		
		<b>Total</b>		

Time of Year	No. of Accidents	Light Condition	No. of Accidents	% of Total
Winter (Dec-Feb)	1	Dark Road-Lighted:	3	50
Spring (Mar-May)	2	Dark Road-Unlighted:	0	0
Summer (Jun-Aug)	0	Dawn:	0	0
Fall (Sep-Nov)	3	Daylight:	3	50
<b>Total</b>	<b>6</b>	Dusk:	0	0
		Unknown:	0	0
		<b>Total</b>	<b>6</b>	

<b>DETAILS OF ACCIDENT HISTORY</b>	
Sear-Brown Group	

Diagram: Pitkin St		Street Name: Pitkin St
County of Monroe		Route Number:
Town of City of Rochester		Location: Pitkin St
		Milepost: E. Main St
		To: Chestnut/Mon
<b>PERIOD STUDIED</b>		Date of Report: 1/13/200
From 10/23/20	(4)	(5)
To: 5/23/200	V	S
32 Months	e	e

(1) No.	(2) Date	(3) Time	(10) Contributing Factors	(11) Apparent Contributing Factors	(12) Description	
L	R	S	W			
7004	5/4/2007	4:05	PDO	4 1 1 117	FixO	V1 TURNED LEFT & DROVE OVER MEDIAN & SIGN. (17) Traffic Control Disregarded
7005	11/4/2006	23:39	PDO	4 1 1 113	FixO	V1 FAILED TO STOP AT STOP SIGN. WENT ACROSS INTERSECTION & HIT THE FIRE HYDRANT (13) Passing or Lane Usage Improper
7006	10/23/2005	14:05	PDO	1 1 2 34,20	Side	V1 SIDESWIPE V2. V2 DROVE OVER MEDIAN & OVER A STREET SIGN (4) Driver Inattention (20) Unsafe Lane Changing
7007	2/19/2006	2:55	PDO	4 1 4 166	Unkn	V1 SLID ON BLACK ICE INTO CURB (66) Pavement Slippery
7008	10/15/2007	14:05	PDO	1 1 1 117,17	RAng	(17) Traffic Control Disregarded (17) Traffic Control Disregarded
7009	5/23/2008	12:40	PDO	1 1 1 117,13	Left	V1 making left out of lot went wrong way down broad st hit v2 going EB (17) Traffic Control Disregarded (13) Passing or Lane Usage Improper
7010						Add accidents found: Pitkin St + Union St Corridors

**Location:** Pitkin St


**Town:** City of Rochester

13-Jan-09

**County:** Monroe

			<b>Milepost:</b> E. Main St		<b>To:</b> Chestnut/Monro			
<b>Time of Day</b>	<b>No. of Accidents</b>	<b>% of Total</b>	<b>Direction</b>	<b># Veh</b>	<b>% of Total</b>	<b>Direction</b>	<b># Veh</b>	<b>% of Total</b>
6 AM - 10 AM	2	17	North:	0	0	NorthEast:	0	0
10:00 AM - 4 PM	5	42	South:	10	43	NorthWest:	0	0
4 PM - 7 PM	1	8.3	East:	3	13	SouthEast:	0	0
7 PM - 12 MID	3	25	West:	9	39	SouthWest:	1	4.3
12 MID - 6 AM	1	8.3	Unknown:	0	0			
<b>Unspecified</b>	<b>0</b>	<b>0</b>				<b>Total</b>	<b>23</b>	
<b>Total</b>	<b>12</b>							
<b>Weather</b>	<b>No. of Accidents</b>		<b>Acc. Type</b>	<b># Veh</b>	<b>% of Total</b>	<b>Acc. Type</b>	<b># Veh</b>	<b>% of Total</b>
Clear:	5	42	Sideswipe:	0	0	Bicycle:	0	0
Cloudy:	3	25	Rear End:	5	42	Right Turn:	1	8.3
Fog:	0	0	Right Angle:	3	25	Driveway:	0	0
Rain:	2	17	Left Turn:	0	0	Backing:	0	0
Sleet:	0	0	Pedestrian:	1	8.3	Overtaking:	1	8.3
Snow:	2	17	Fixed Object:	0	0	Unknown:	1	8.3
Unknown:	0	0	Head on:	0	0			
<b>Total</b>	<b>12</b>					<b>Total</b>	<b>12</b>	
<b>Pavement</b>	<b>No. of Accidents</b>		<b>Accident Severity</b>		<b>No. of Accidents</b>		<b>% of Total</b>	
Dry:	7	58	Fatal:		0		0	
Muddy:	0	0	Non-Fatal Injury:		1		8.3	
Other:	0	0	Property damage only:		11		92	
Slush:	0	0	Non-reportable:		0		0	
Snow/Ice:	2	17		<b>Total</b>	12			
Wet:	3	25						
Unknown:	0	0	<b>Type of Vehicle</b>		<b>No. of Accidents</b>		<b>% of Total</b>	
<b>Total</b>	<b>12</b>		Passenger Cars:		23			
			Commercial Vehicles:					
				<b>Total</b>				
<b>Time of Year</b>	<b>No. of Accidents</b>		<b>Light Condition</b>		<b>No. of Accidents</b>		<b>% of Total</b>	
Winter (Dec-Feb)	4	33	Dark Road-Lighted:		5		42	
Spring (Mar-May)	4	33	Dark Road-Unlighted:		0		0	
Summer (Jun-Aug)	2	17	Dawn:		0		0	
Fall (Sep-Nov)	2	17	Daylight:		7		58	
<b>Total</b>	<b>12</b>		Dusk:		0		0	
			Unknown:		0		0	
				<b>Total</b>	12			



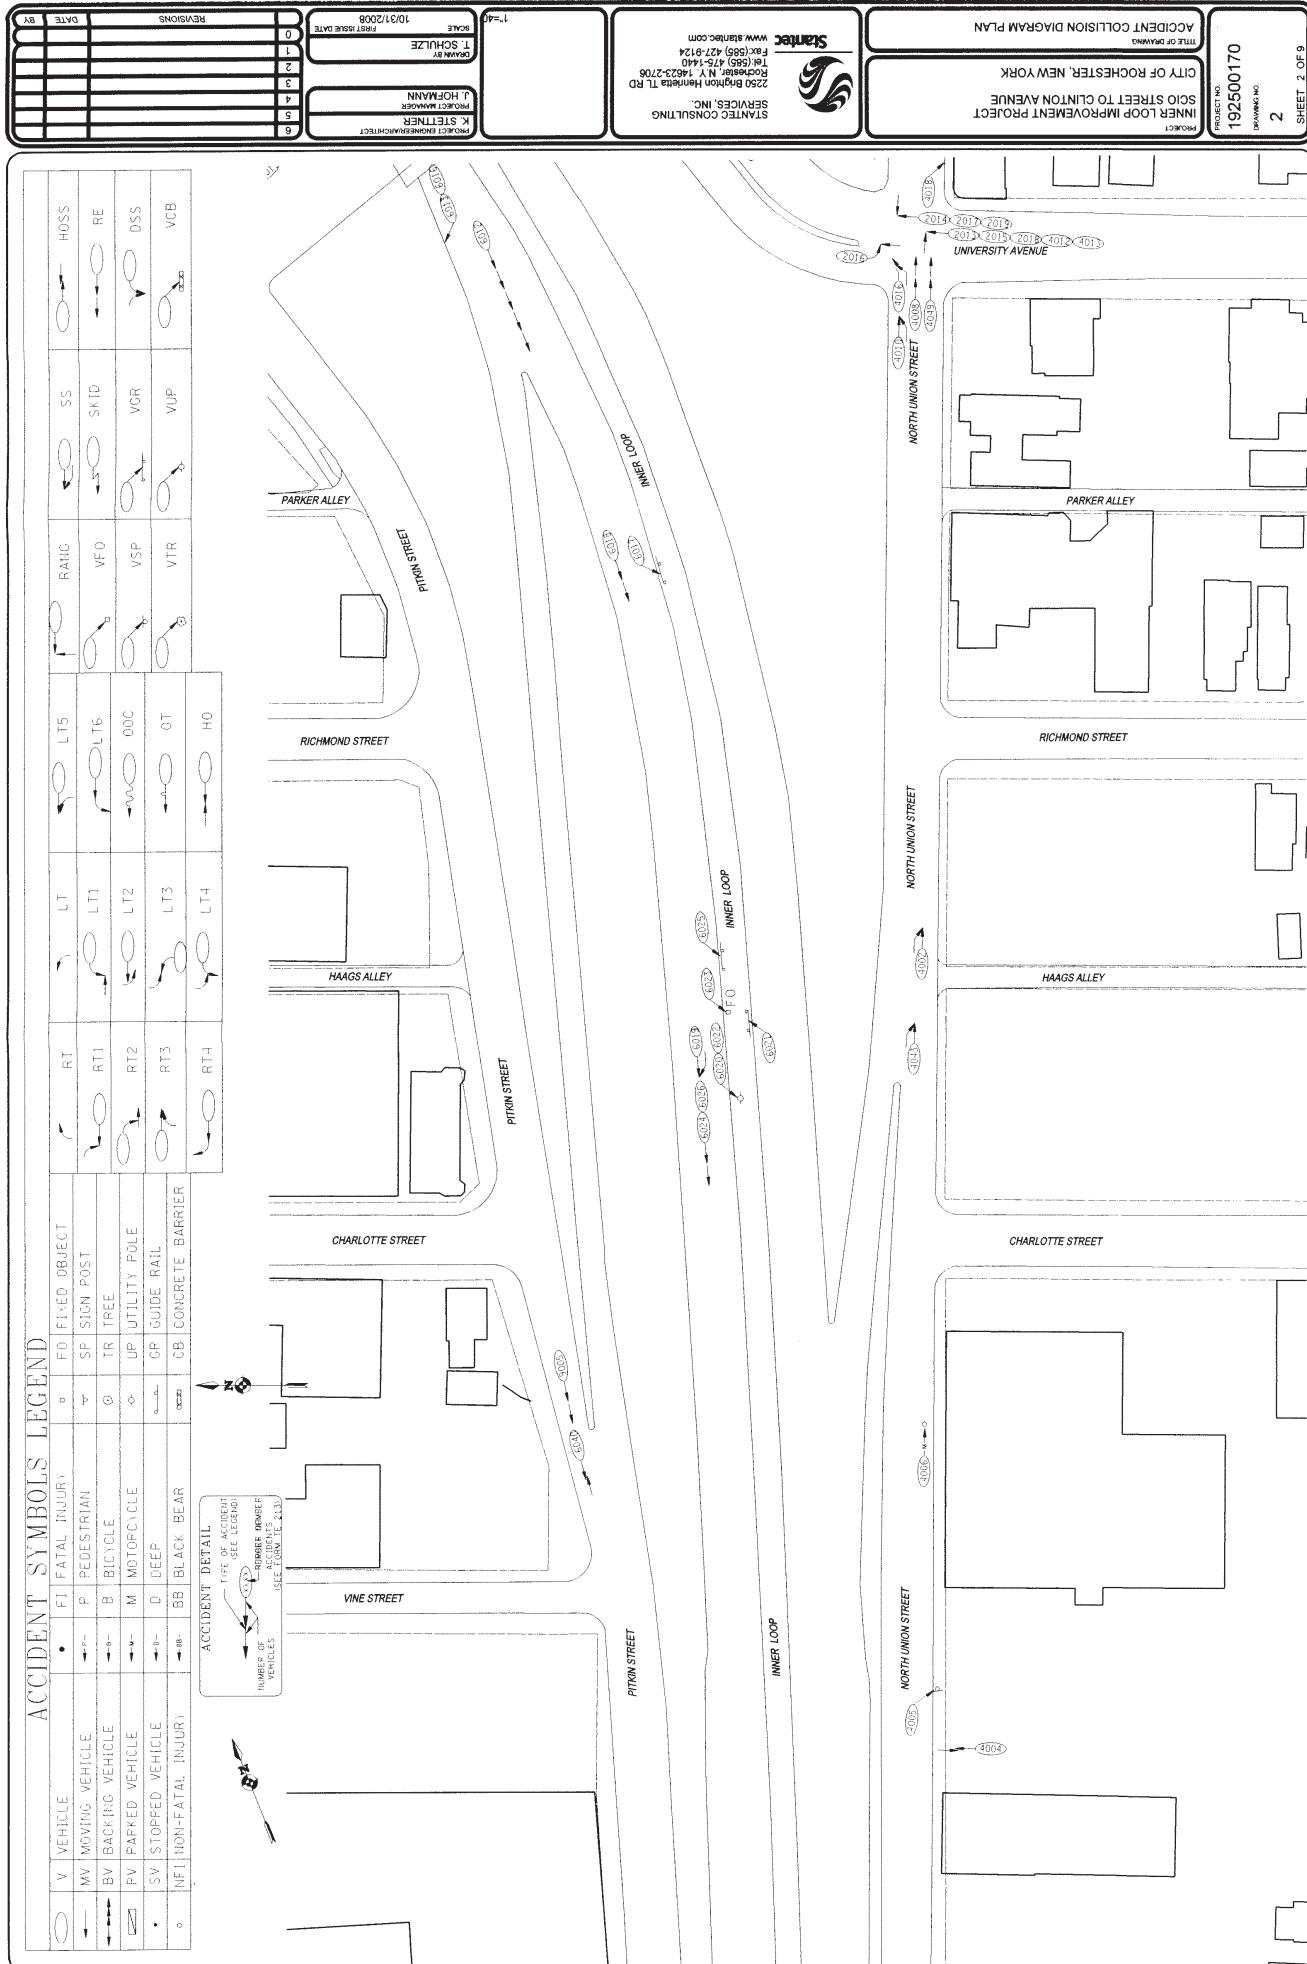

REVISONS	DATE	REVISIONS	DATE
6	7/19/2006	7	7/19/2006
K SCITTELLER PROJECT MANAGER	J HOPFMANN PROJECT ENGINEER	STANTEC CONSULTING SERVICES, INC.	www.stantec.com Fax: (650) 477-1140 Tel: (650) 477-2700
6	1	1	1
5	2	2	2
4	3	3	3
3	4	4	4
2	5	5	5
1	6	6	6
0	7	7	7



PROJECT NO. 192500170		CITY OF ROCHESTER, NEW YORK		INNER LOOP IMPROVEMENT PROJECT		SCIO STREET TO CLOINTON AVENUE		ACCDENT COLLISION DIAGRAM PLAN	
SHEET 4 OF 9		4		192500170		PROJECT NO. 192500170		CITY OF ROCHESTER, NEW YORK	
REVISONS BY DATE 7/19/2006		DRAWN BY D. HARRIS		PUBLISHED DATE 7/19/2006		SCHMIDT CONSULTING SERVICES, INC.		2250 Brighton Henrietta Twp Rd, Rochester, NY 14614 Fax: (585) 447-8114 www.schmidt.com	
6		5		4		3		2	
PROJECT MANAGER J. HOFFMANN		K STEINER		POTENTIAL CONSTRUCTION		SERVICES, INC.		SCHMIDT CONSULTING SERVICES, INC.	
6		5		4		3		2	

### ACCIDENT SYMBOLS LEGEND

V	VEHICLE	•	F1 FATAL INJURY	o	F0 FITTED OBJECT	~	LT	~	LTS	~	RANG	~	SS	~	HLOSS
MV	MOVING VEHICLE	→	P PEDESTRIAN	↔	SP SIGN POST	↔	RT	↔	LT1	↔	LT6	↔	SKID	↔	RE
BV	BACKING VEHICLE	←	B BICYCLE	⊕	TR TREE	⊕	RT1	↔	LT1	↔	LT6	↔	VFO	↔	
PV	PARKED VEHICLE	↔	M MOTORCYCLE	◊	UP UTILITY POLE	◊	RT2	↔	LT2	↔	ODC	↔	VSP	↔	DSS
SV	STOPPED VEHICLE	↔	D DEER	↔	GR GUIDE RAIL	↔	RT3	↔	LT3	↔	OT	↔	VTR	↔	VCB
•	INF NON-FATAL INJURY	↔	BB BLACK BEAR	↔	CB CONCRETE BARRIER	↔	PT4	↔	LT4	↔	HO	↔		↔	


### ACCIDENT DETAIL

TYPE OF INCIDENT SEE LEGEND  
 NUMBER OF VEHICLES  
 (SEE FIGURE 21)



PROJECT NO.		192500170		TITLE OF DRAWING		INNER LOOP IMPROVEMENT PROJECT	
SHEET NO.		5		DATE		09/04/2006	
REVISONS		0		PRT/ISSUE DATE		7/18/2006	
NAME		DANIEL BY		ADDRESS		2250 Brigham Avenue, 11th Fl., Bronx, NY 10453	
PHONE		(212) 589-4731/4		FAX		(212) 589-1162-2706	
E-MAIL		www.smarc.com		STANTEC CONSULTING		K STEINER	
FAX		PROJECT MANAGER		J HOFMANN		PROJECT ENGINEER	
TELE		66		3		5	



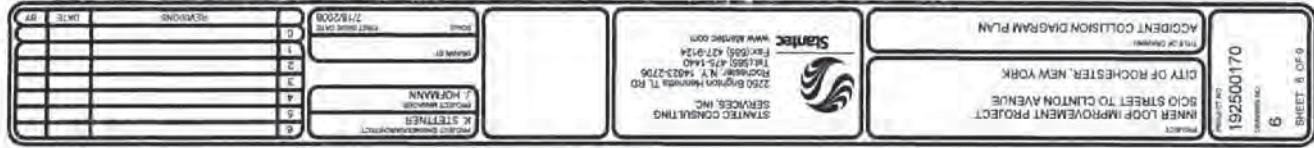

ACCIDENT SYMBOLS LEGEND



1. PROJECT NUMBER	2. PROJECT NAME	3. CONTRACTOR	4. DATE
192500170	CITY OF ROCHESTER, NEW YORK INNER LOOP IMPROVEMENT PROJECT SOLID STREET TO CLINTON AVENUE	STANTE CONSULTING INC 2225 Grandview Way, Suite 110 Bronx, NY 10323-2700 www.stante.com	5/16/2008
K. SEELINGER	J. HOFMANN	Sante	5/16/2008
L. HOFMANN	M. STANTON	5/16/2008	5/16/2008
N. STANTON	O. STANTON	P. STANTON	5/16/2008

### ACCIDENT SYMBOLS LEGEND

V	VEHICLE	•	FI FATAL INJURY	○	FO FIXED OBJECT	↑	RT	↗	LT	↖	LTS	↙	SS	↖	HOSS
—	MV MOVING VEHICLE	→—	P PEDESTRIAN	—○	SP SIGN POST	—↑	RT1	—↗	LT1	—↖	LTS1	—↙	SS1	—↖	HOSS1
→—	BV BACKING VEHICLE	→—○	B BICYCLE	—○	TR TREE	—○	RT2	—↗	LT2	—↖	LTS2	—↙	SS2	—↖	RE
→—○	PV PARKED VEHICLE	→—○	M MOTORCYCLE	—○	UP UTILITY POLE	—○	RT3	—↗	LT3	—↖	LTS3	—↙	SS3	—↖	DSS
—○	SV STOPPED VEHICLE	—○	D DEER	—○	GR GUIDE RAIL	—○	RT4	—↗	LT4	—↖	LTS4	—↙	SS4	—↖	VCR
○	NFI NON-FATAL INJURY	—○	BB BLACK BEAR	—○	CB CONCRETE BARRIER	—○									

ACCIDENT DETAIL  
SEE LEGEND  
NUMBER OF  
VEHICLES  
SEE FIGURE 21.1

RAMP TO I-490 EASTBOUND

REVERSE

RAMP TO CLINTON AVENUE

CLINTON AVENUE

CARRON ST

HOSS

RE

DSS

VCR

SS

HOSS

RE

DSS

VCR

CLINTON AVENUE

HOSS

RE

DSS

VCR

SS

HOSS

**ACCIDENT SYMBOLS LEGEND**

○ V	VEHICLE
● MV	Moving Vehicle
↔ BV	Backing Vehicle
↔ PV	Parked Vehicle
• SV	Stopped Vehicle
○ NF1	Non-Fatal Injury
• FI	Fatal Injury
↔ P	Pedestrian
↔ B	Bicycle
↔ M	Motorcycle
↔ D	Ceef
↔ BB	Black Bear
○ SP	Fixed Object
○ POST	Sign Post
○ TR	Tire
○ UP	Utility Pole
○ GR	Guide Rail
○ CB	Concrete Barrier
○ HO	Hazardous Object

ACCIDENT DETAIL

... TYPE OF ACCIDENT  
SEE SECTION  
NUMBER OF  
VEHICLES  
SEE ACTIVITIES  
SECTION 215.

ACCIDENT COLLISION DIAGRAM PLAN  
MILL OF IRONING  
PROJECT NO. 192500170  
8 SHEET 8 OF 9

INNER LOOP IMPROVEMENT PROJECT  
SOLO STREET TO CUNNING AVENUE  
CITY OF ROCHESTER, NEW YORK

STANTEC CONSULTING  
SERVICES, INC.  
PROJECT MANAGER  
J. HOPFMANN

STANTEC CONSULTING  
SERVICES, INC.  
PROJECT ENGINEER  
K. SEITER

REVISIONS  
DATE  
7/18/2008  
PRESERVE DATE  
0  
1  
2  
3  
4  
5  
6

Stantec  
Fax: (585) 278-1624  
2255 Brighton Road, Henrietta, NY 14223-2706  
www.stantec.com

ACCOLTE  
DATE  
8/12/2008  
PRESERVE DATE  
0  
1  
2  
3  
4  
5  
6

GENESSEE RIVER  
GENESSEE  
I-490 WESTBOUND  
I-490 EASTBOUND  
EXCHANGE STREET  
SOUTH FITZHUGH STREET

**INNER LOOP IMPROVEMENT PROJECT**  
SIC OF STREET TO CLINTON AVENUE

**CITY OF ROCHESTER, NEW YORK**

**ACGDEET COLLISSION DRAGRAM PLAN**

**PROJECT NUMBER:** 19250170  
**DATE:** 06/28/2008  
**TIME OF DRAWING:** 10:23:27 AM

**STATE CONSULTING SERVICES INC**  
2205 Brueker Highway, T.R.D.  
Rochester, NY 14623-2708  
Tel: (585) 475-1440  
Fax: (585) 475-9124  
www.stateinc.com

**PROJECT MANAGER:** J. HOPFMANN  
**DESIGNER:** K. SEETNER  
**PROTOTYPING ENGINEER/ARCHITECT:** D. SOULI  
**REVISIONS:** 0  
7/18/2008  
REVISOR: DATE: 07/18/2008

**ACCIDENT SYMBOLS LEGEND**

Symbol	Description
V	VEHICLE
MV	MOVING VEHICLE
BV	BACKING VEHICLE
PV	PARKED VEHICLE
SV	STOPPED VEHICLE
INF	NON-FATAL INJURY
F1	FATAL INJURIES
P	PEDESTRIAN
B	BICYCLE
M	MOTORCYCLE
D	DEER
BB	BLACK BEAR
FO	FIXED OBJECT
SP	SIGN POST
TR	TREE
UP	UTILITY POLE
GR	GUIDE RAIL
CB	CONCRETE BARRIER
RT	RT
L1	L1
L11	L11
L12	L12
L13	L13
L14	L14
L15	L15
L16	L16
HO	HO
VFO	VFO
VSP	VSP
VTR	VTR
VUP	VUP
RE	RE
DSS	DSS
VGR	VGR
SLID	SLID
SS	SS
HOSS	HOSS

**ACCIDENT DETAIL**

SEE LEGEND  
NUMBER OF  
VEHICLES  
USED FOR THIS

**CLINTON AVENUE**  
CLINTON AVENUE NORTHBOUND  
CLINTON AVENUE SOUTHBOUND  
L48 WESTBOUND  
L48 EASTBOUND  
BYRON STREET  
SOUTH AVENUE  
MOUNT HOPE BOULEVARD

# Memo

---



**Stantec**

## **Inner Loop – Accident Reduction Summary**

---

Date: December 1, 2013  
To: Bill Holthoff, Stantec  
From: Paula Benway, Stantec

---

### **Inner Loop Accident Reduction Summary**

The following information summarizes the accident reduction and corresponding safety benefit analysis for the Inner Loop Transformation Project. *An extensive overall project “Accident History” evaluation is included in the Inner Loop - Accident History Technical Memorandum, dated April 24, 2009, and is referenced herein.*

Within or near the project corridor, there are generally no areas where accident patterns or rates are significant or abnormally elevated. Accident rates and patterns appear to be consistent with urban expressways and urban arterials, streets and intersections.

It was observed however that the rate of severe (personal injury) accidents is much higher on the Inner Loop expressway when compared to the adjacent Union and Pitkin Streets. The following summarizes the rates of severe accidents on the three (3) primary roads.

- Inner Loop – 30 accidents includes 13 personal injuries (43%)
- Union Street – 61 accidents includes 10 personal injuries (16%)
- Pitkin Street – 12 accidents includes 1 personal injury (8%)

### **Safety Benefits Evaluation**

Because the existing accident rates are generally near or below the statewide average (except intersections), it is reasonable to assume the total number of accidents will not go down substantially. Any projected reduction in traffic volume on the combined Inner Loop/Union Street/Pitkin Street corridors due to this project will result in a corresponding increase in volume on the nearby city street network. As such, although accidents may decrease on the project corridor (due to lower volumes), there will most likely be an offsetting increase elsewhere on the nearby city street network.

The project will however reduce the rate of severe accidents (i.e. personal injury crashes) due primarily to a proposed reduction of the speed limit from a high speed 45 mph to a low-speed city street speed of 30 mph. The elimination of numerous non-standard and non-confirming roadway features on the Inner Loop expressway will also help reduce the severity of accidents.

A total of 30 reportable crashes occurred over a three year period along the existing high speed,

non-standard expressway section of the Inner Loop. Of the 30 accidents, 13 (or 43%) involved personal injuries. By comparison, the low-speed Union and Pitkin Street segments experienced much lower rates of injury accidents during the same study period, with rates of 16% and 8%, respectively. The average rate of injury accidents of the two city streets is therefore 12%.

Considering that the project will combine the expressway segment with Union Street, thus creating a single standardized low-speed city street/boulevard, the expected resultant effect will be a reduction of severe accidents related to the existing high speed facility to a similar rate that exists on low-speed Union Street and Pitkin Streets. A reduction from 43% (13 injury crashes) to 12% (4 injury crashes), is therefore expected. Since the total number of accidents will remain unchanged, the eliminated injury crashes will convert to simple property damage (only) crashes.

Considering there will be no change to the speed limit, accident rates and level of severity on Union and Pitkin Streets are expected to remain unchanged within the project limits.

The quantifiable safety benefits can be derived by first calculating the projected reduction in injury accidents as a direct result of the proposed improvements. As described above, the expected project effect on accident severity is a projected reduction from 13 injury accidents to 4 injury and 9 additional property damage (only) accidents, thus emulating the current rate of injury accidents on the adjacent city streets.

Accident costs for the various types of reported accidents (i.e. Property Damage Only, Injury and Fatalities) were then applied to both the existing accident rates and severity and future rates and severity. Accident costs were derived from TIGER Benefit-Cost Analysis (BCA) Resource Guide, updated on May 15, 2013.

Finally, given consideration to the unique nature of this project, NYSDOT Safety Benefits Evaluation Form TE 164 was used but slightly modified (for clarity purposes) to quantify the monetary benefits of reducing accident severity.

Although not always resulting in monetary benefits, the following considerations for the three corridors were made:

**Pitkin Street** – Pitkin Street will most likely be converted into an alley way to provide access to adjacent existing and potential new developments in the area only. Major signalized intersections at East Avenue and at Broad Street will be eliminated and no connections south/west of Broad Street is anticipated. With these changes, it was assumed that all the accident patterns observed would be reduced on Pitkin Street. However, it is accepted that the reduction of accidents will most likely be offset by additional accidents on adjacent streets and intersections.

**Inner Loop & Union Street** – For purposes of estimating safety benefits, although both roadways will ultimately be combined into a single thoroughfare, the statistical data for both the Inner Loop and Union Street were kept separate, as it is expected that there will be little, if any, significant change to the rate and/or level of severity of accidents on Union Street. Union Street will continue to function as it does today, as a low-speed city street. Future accidents on the reconfigured Inner Loop however are expected to emulate those rates and level of severity that exist on Union and Pitkin Streets.

The proposed improvement includes bringing the current Inner Loop (limited access, high speed,

December 1, 2013  
Inner Loop  
Page 3 of 3

expressway) to an at grade configuration along the Union Street corridor. Although Union Street will be converted to a two-way arterial, all entrance/exit ramps will be eliminated and improved intersection geometry with turn lanes, medians, and potential roundabouts along the new Union Street corridor are included. As previously discussed, accident severity reduction includes only the expressway injury-related accidents. A reduction from 13 injury crashes to 4 injury and 9 additional property damage (only) crashes is expected. Based on average accident costs, an Estimated **Annual Safety Benefit of \$460,008** is anticipated.

**STANTEC CONSULTING SERVICES INC.**

Attachments: Safety Benefits Evaluation Form

STATE OF NEW YORK  
DEPARTMENT OF TRANSPORTATION  
TRAFFIC AND SAFETY DIVISION  
SAFETY BENEFITS  
EVALUATION FORM

TRAFFIC & SAFETY IDENTIFICATION NUMBER						
EVALUATION OF ALTERNATE NO:						
STUDY PERIOD		From 1/1/2005	To 3/7/2008	No. of Yrs. 3.16		

LOCATION	Route No. or Street Name  Inner Loop (Howell/Monroe to Charlotte St)	State Highway No.  Rt. 940T	From or At Reference Marker  Howell Street Off - Ramp								
	At Intersection with (if applicable)	State Highway No.	To Reference Marker  Charlotte Street Off - Ramp								
PROJECT DATA	PROPOSED IMPROVEMENT:  The proposed improvements include the conversion of an existing high speed Inner Loop x-way, with adjacent parallel low speed city streets, back to the original street grid using sustainable low speed street network principles.										
	Present AADT: <u>6840</u>	Future AADT: <u>6840</u>	Volume Correction Factor (VCF): <u>1</u>								
REDUCTION CALCULATION	<p>METHOD I (From Reduction Factor Table) Average Reduction Factor _____%</p> <p>METHOD II (Engineering Analysis)</p> <table> <tr> <td>a. Total Accidents: <u>40</u></td> <td>a. Existing Accidetn Rate: _____</td> </tr> <tr> <td>b. Accidents Reduced: <u>0</u> (but severity reduced)</td> <td>b. Future Accident Rate: _____</td> </tr> <tr> <td>C. Calculated RF (b/a): <u>0%</u></td> <td>c. Difference (a-b): <u>0</u></td> </tr> <tr> <td></td> <td>d. Calculated RF (c/a): <u>#DIV/0!</u> %</td> </tr> </table> <p>METHOD III (For General Upgradings)</p> <p>BRIEFLY EXPLAIN HOW EXPECTED REDUCTION WAS DERIVED: By converting a high speed x-way to a low speed boulevard, the effect will be a reduction of the severity of accident types. 32.5% of the prior-years' accidents that occurred along the x-way resulted in personal injuries while the two adjacent city streets, Pitkin and Union, experienced 7% and 12% injuries, respectively. By eliminating the the high speed expressway component, the severity of future accidents is expected to emulate those along the existing low speed city streets, estimated to be the average of the two, or 9.5%.</p>			a. Total Accidents: <u>40</u>	a. Existing Accidetn Rate: _____	b. Accidents Reduced: <u>0</u> (but severity reduced)	b. Future Accident Rate: _____	C. Calculated RF (b/a): <u>0%</u>	c. Difference (a-b): <u>0</u>		d. Calculated RF (c/a): <u>#DIV/0!</u> %
a. Total Accidents: <u>40</u>	a. Existing Accidetn Rate: _____										
b. Accidents Reduced: <u>0</u> (but severity reduced)	b. Future Accident Rate: _____										
C. Calculated RF (b/a): <u>0%</u>	c. Difference (a-b): <u>0</u>										
	d. Calculated RF (c/a): <u>#DIV/0!</u> %										

PRE-PROJECT COST PER ACCIDENT CALCULATION				POST-PROJECT COST PER ACCIDENT CALCULATION			
TYPE	NO. ACC.	COST/ACC	ACC. COST	TYPE	NO. ACC.	COST/ACC	ACC. COST
Fatal	0	x 9100000 =	0	Fatal	0	x 9100000 =	0
Injury	13.0	x 164720 =	2,141,360	Injury	4.0	x 164720 =	658,880
F & I	0.0	x 4632360 =	0	F & I	0.0	x 4632360 =	0
PDO	27.0	x 3206 =	86,562	PDO	36.0	x 3206 =	115,416
Total	40	\$ 2,227,922		Total	40	\$ 774,296	

SAFETY BENEFITS	A. ESTIMATED ANNUAL ACCIDENT COST WITH NO IMPROVEMENT (Pre-Project):						
	ACC/YR <u>12.66</u>	X VCF <u>1</u>	X BEFORE COST/ACCIDENT	<u>\$55,698</u>	=	<u>\$705,038.61</u>	
B. ESTIMATED ANNUAL ACCIDENT COST WITH PROPOSED IMPROVEMENT (Post-Project):							
ACC/YR <u>12.66</u>	X VCF <u>1</u>	X (1.00- <u>0</u> RF) X AVG. COST/ACC.	<u>\$ 19,357</u>	=	<u>\$ 245,030.38</u>		
ESTIMATED ANNUAL SAFETY BENEFITS (A-B) = <u>\$ 460,008</u>							

